


# Promultis BLOX PCAP Video Wall Screen

The Promultis BLOX is a 55" Video Wall Screen - Object Recognition Ready with 100 Projected Capacitive Touch Points.



Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.

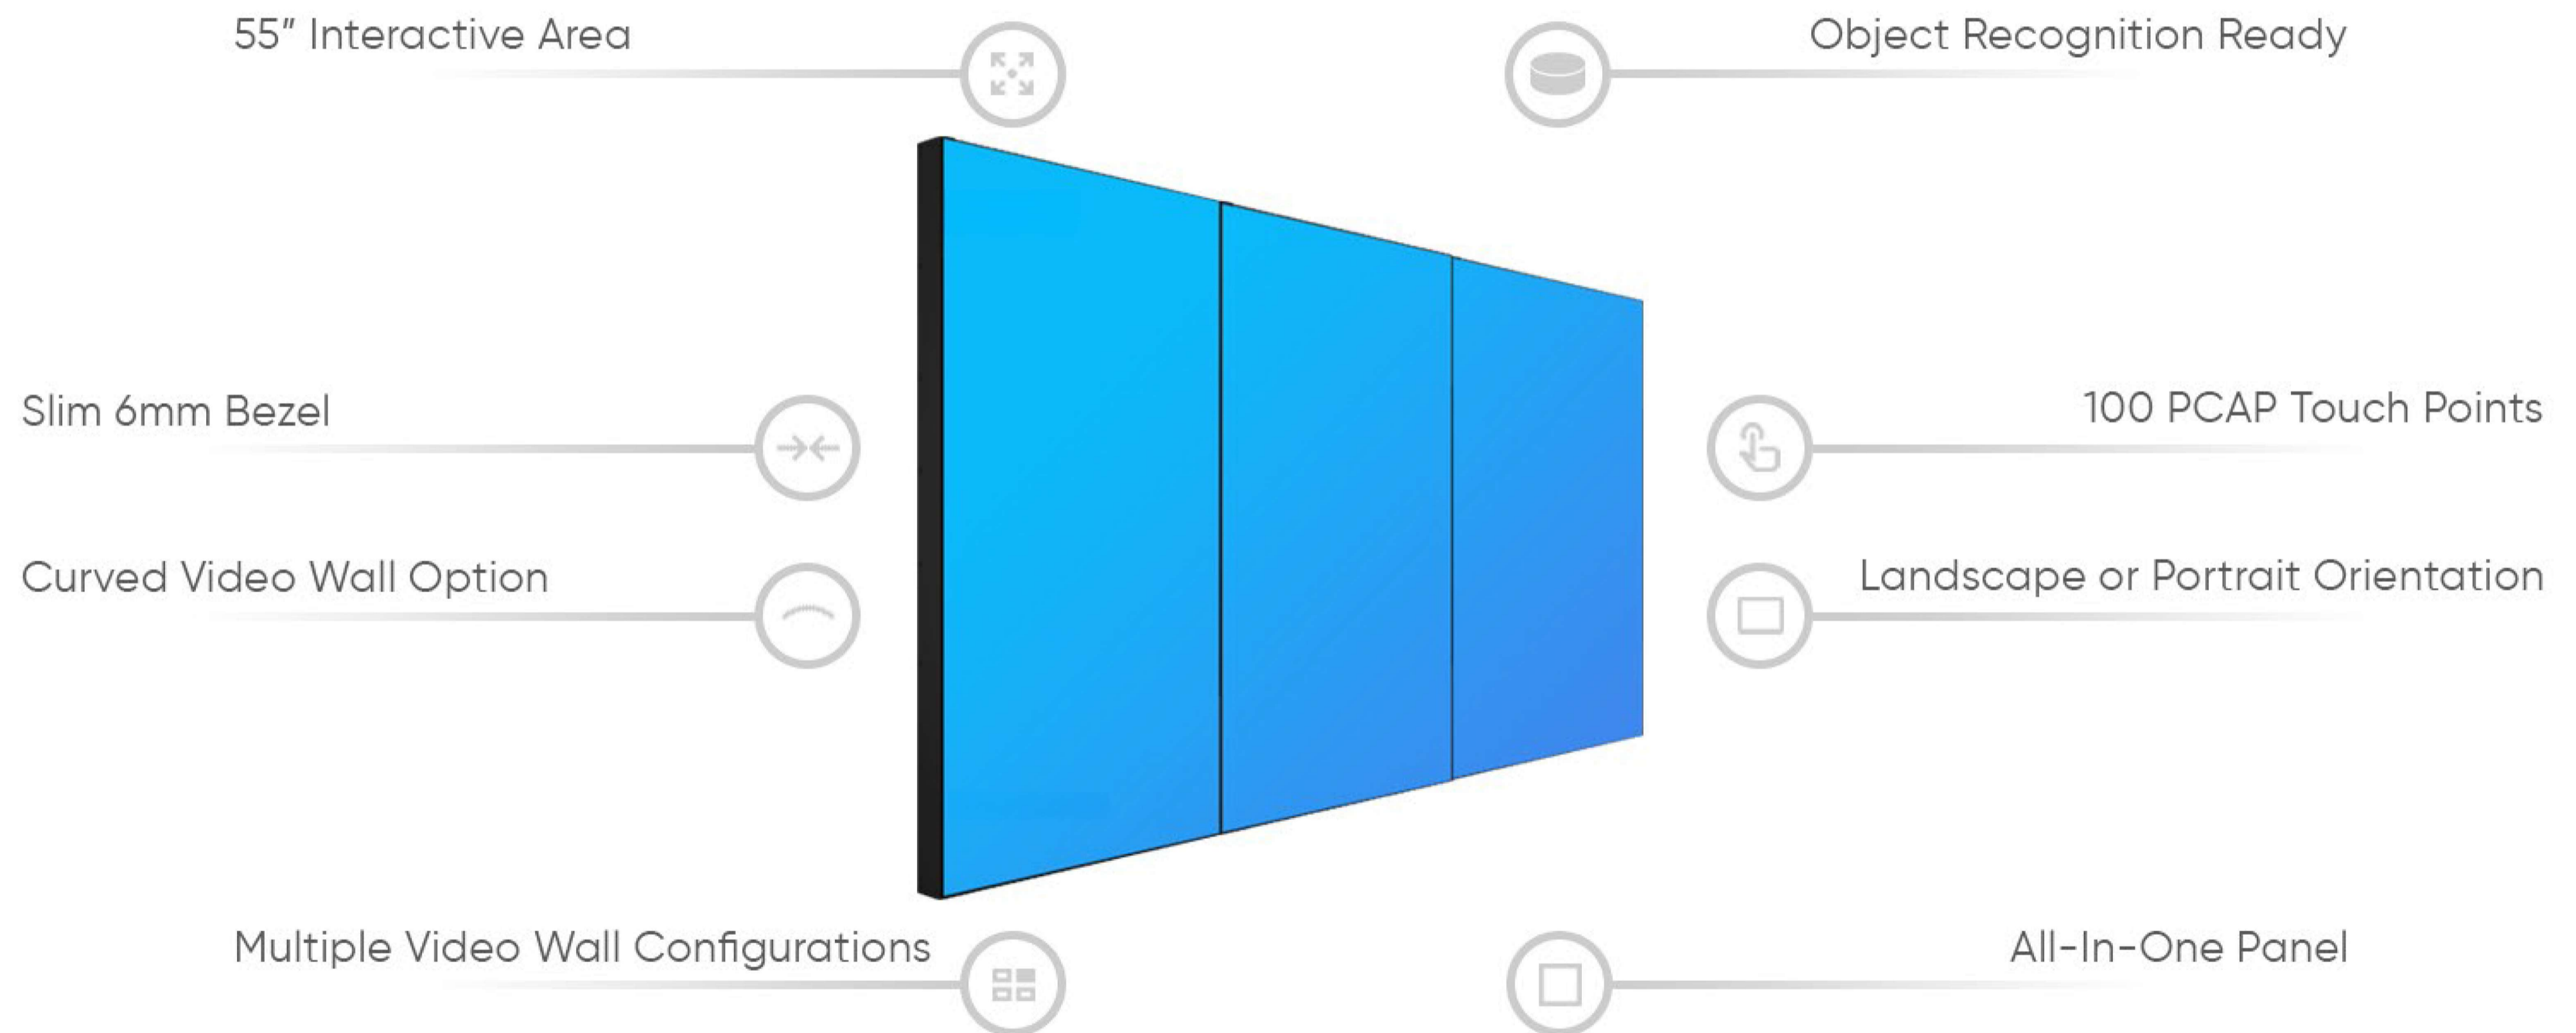

[promultis]



For more exciting multitouch products visit  
[www.promultis.info](http://www.promultis.info)  
or call +44 (0) 239 251 2794

GENERAL	
Detection Method	Projected Capacitive Technology Multitouch
Input Method Sizes	Finger and Gloved Finger
Diagonal Inches	55"
Aspect Ratio Glass	16:9
Substrate Glass	Extra Clear Anti-Fingerprint Coated Toughened Glass
Glass Thickness	3,3 mm
Bezel Color	Black Matte
Interface OS	HID
Multitouch Single Unit	Windows, Linux, Android, Chrome OS, Generic Media Players, others
Multitouch Videowall Mode	Windows 10 (Recommended)
OS Single Touch	Mac OS X Yosemite (Multitouch Support Through TUIO Bridge for Applications)
Data Connectivity	USB 2.0
LCD Bezel	6mm - Equal in all sides - Top, Bottom, Left, Right
LCD Weight	40,5 Kg
LCD Dimensions	1223 × 694 mm
Object Recognition	YES - Compatible with 6 TAGS
Touch Interactions	Pointer or Touch Events for Single Unit   Pointer Events for Video Walls
Speakers	2 × 10 Watts
DISPLAY	
Panel Type	IPS / EDGE LED
Touch Response Time	5 milliseconds

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit  
[www.promultis.info](http://www.promultis.info)  
 or call +44 (0) 239 251 2794

Aspect Ratio	16:9
Contrast Ratio	1400:1
Viewing Angle	178° / 178°
Display Resolution	1920 × 1080
Daisy Chain	Up to 6 panels for each single Display Port Input
Brightness	500 cd/m <sup>2</sup>
Panel Lifetime Color	Aprox. 60000 Hours
Depth	1.07 Billion Color
Panel Position	Landscape / Portrait / Table
VESA Mount	600×400
Power Consumption	190 W
Power	100 - 240 V AC
<b>ENVIRONMENTAL</b>	
Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 60°C
<b>PACKAGE</b>	
Box Dimensions	1450 × 890 × 280 mm
Box Weight	48.75 Kg


Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit  
[www.promultis.info](http://www.promultis.info)  
 or call +44 (0) 239 251 2794

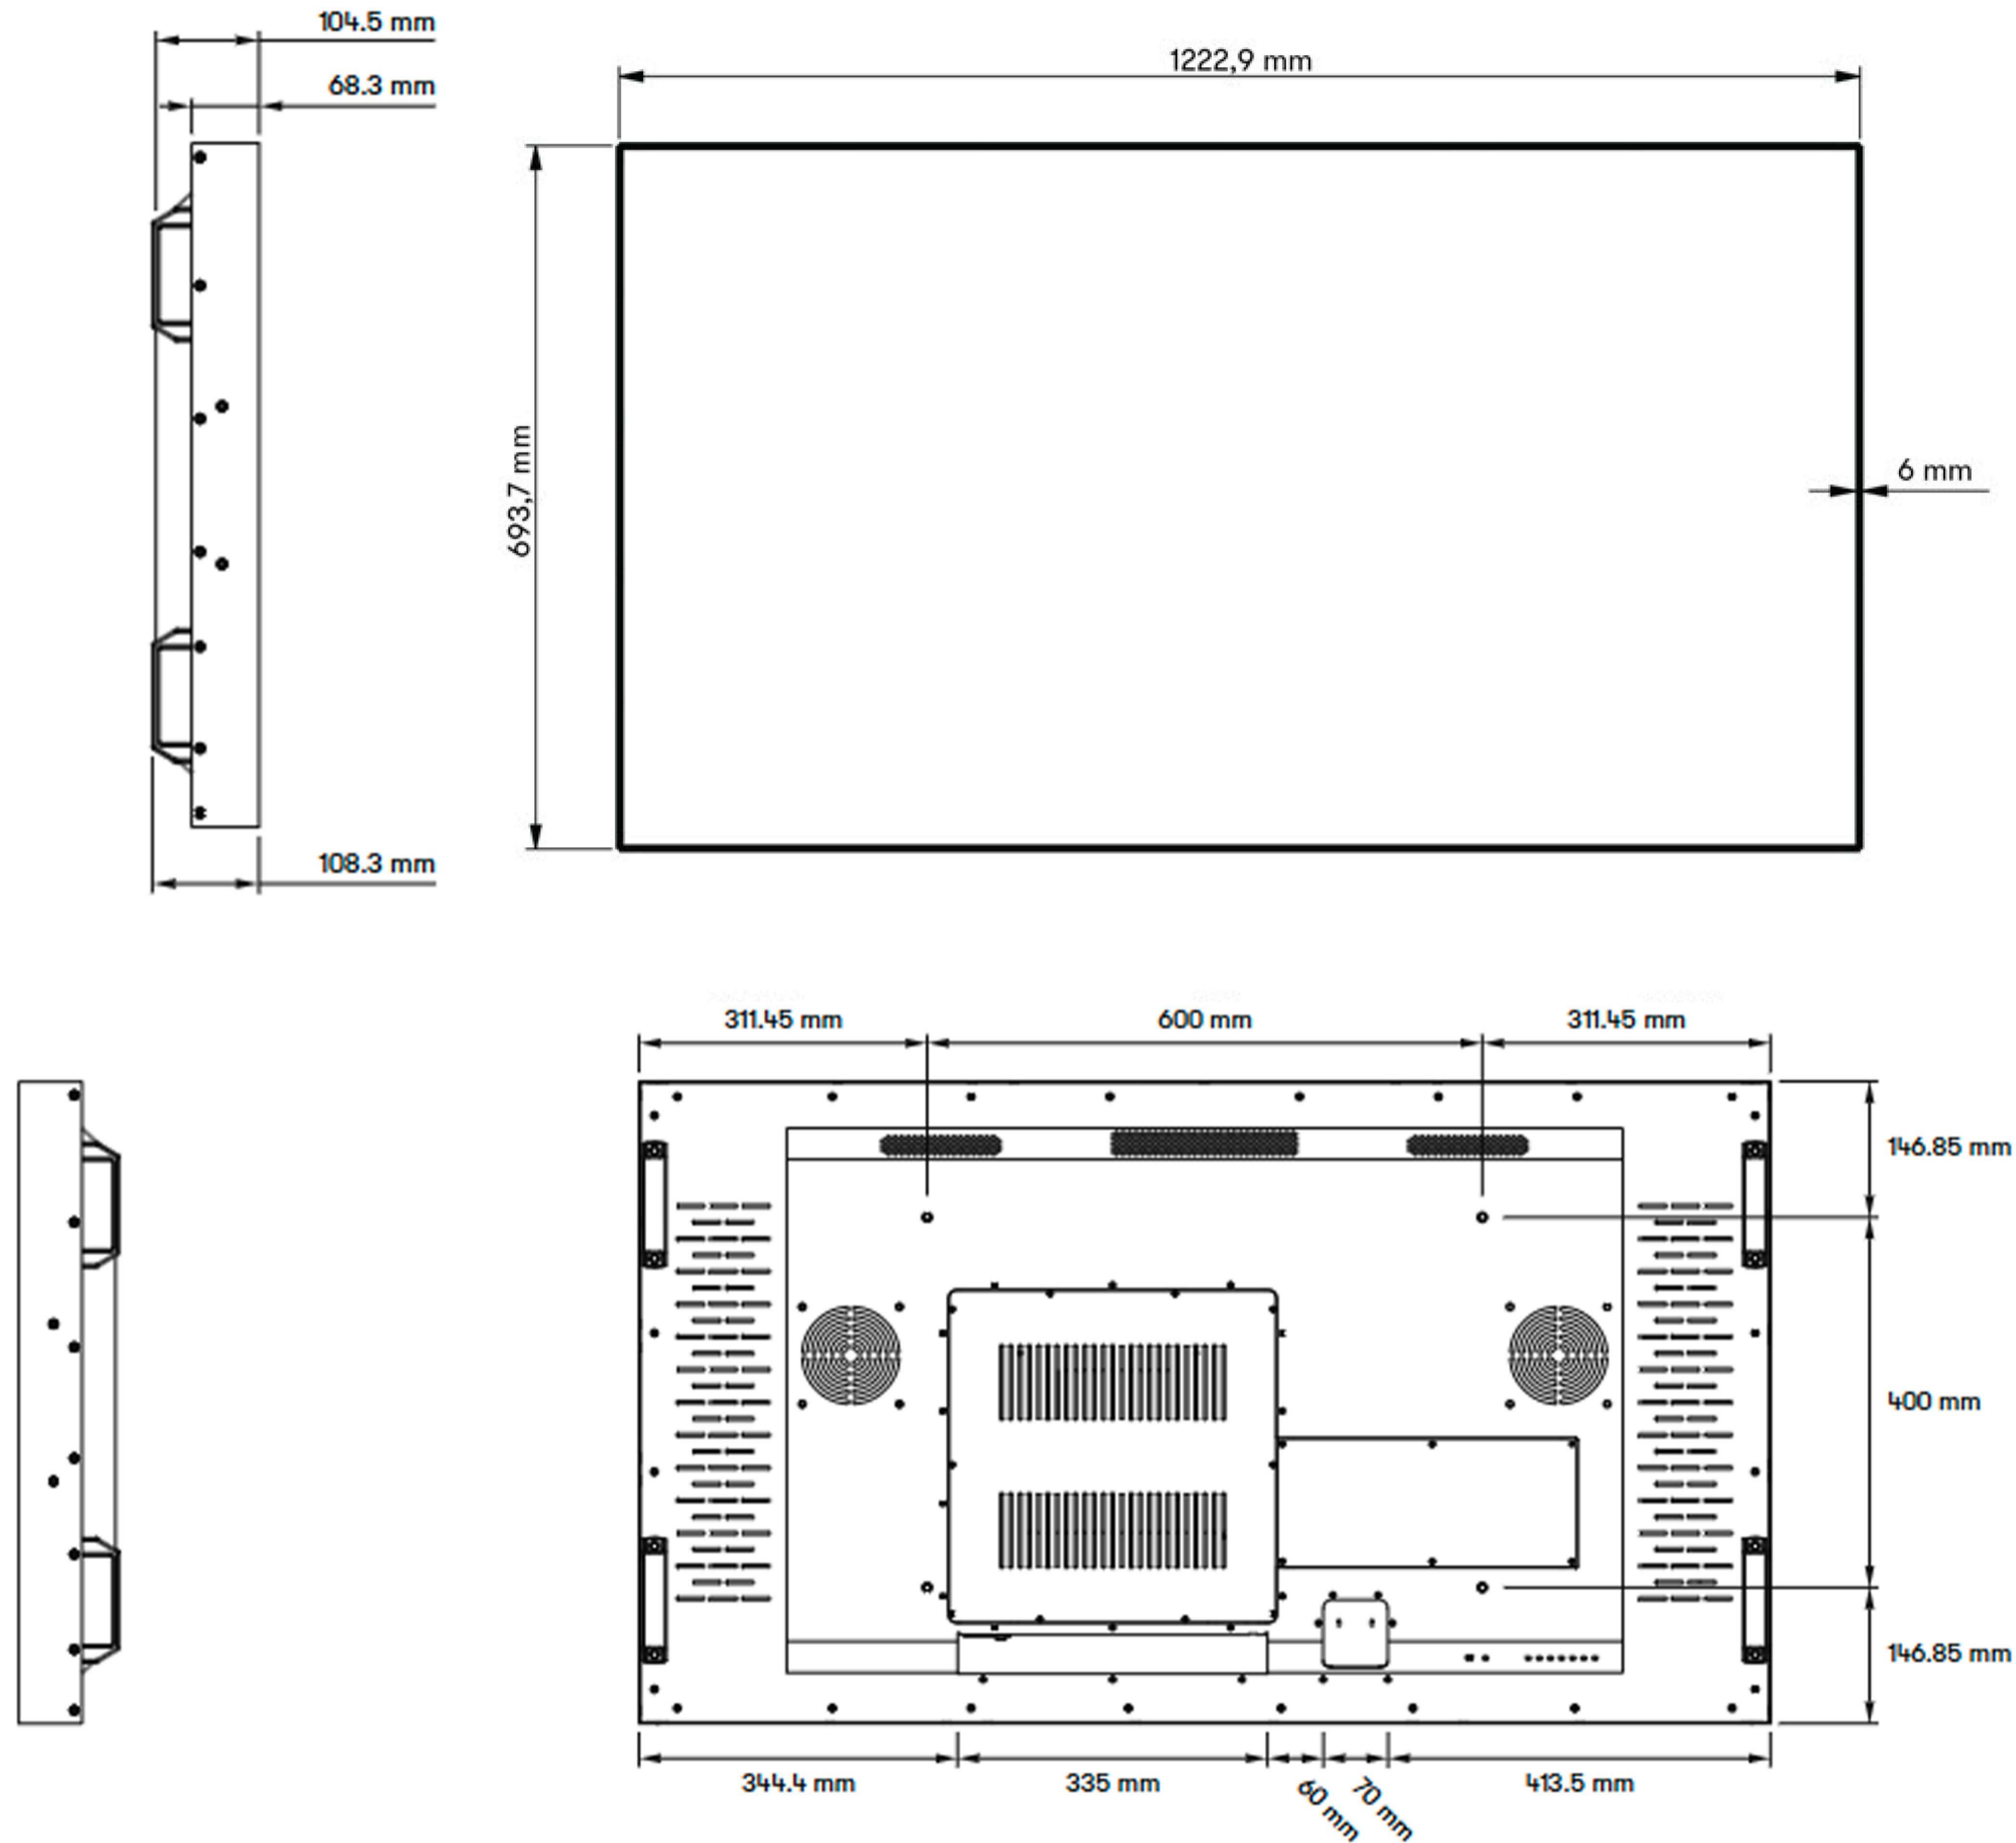


Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit  
[www.promultis.info](http://www.promultis.info)  
 or call +44 (0) 239 251 2794

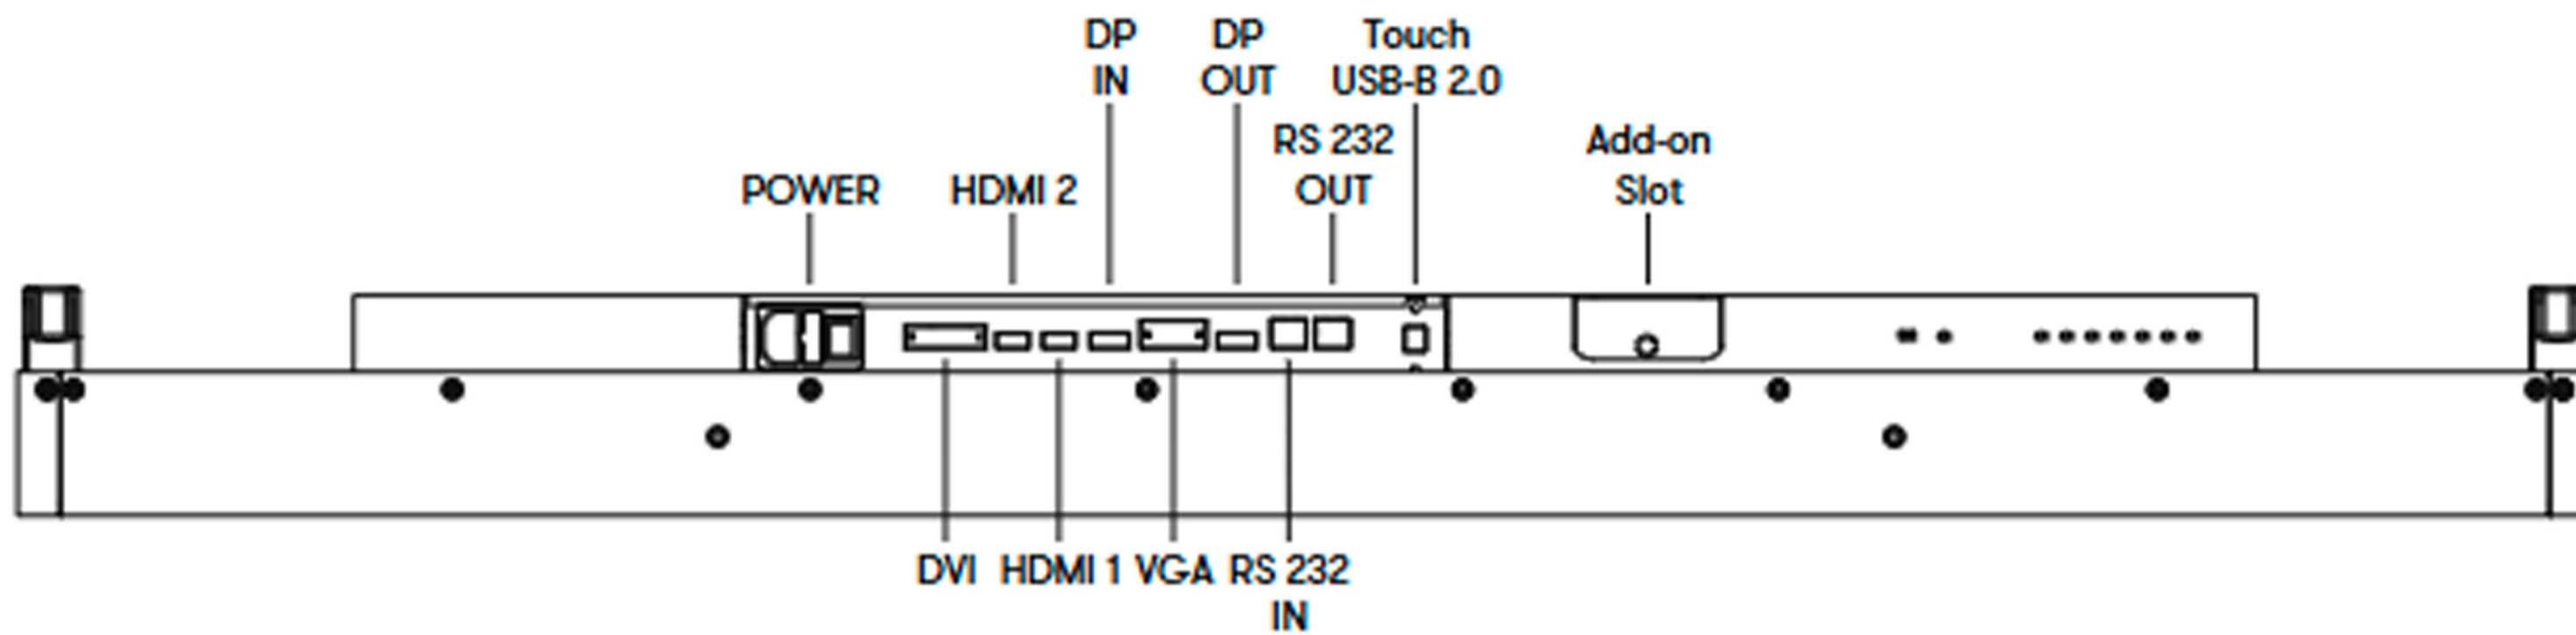

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit  
[www.promultis.info](http://www.promultis.info)  
or call +44 (0) 239 251 2794