




[promultis]

Promultis 55" Bezel-less Video Wall Screen

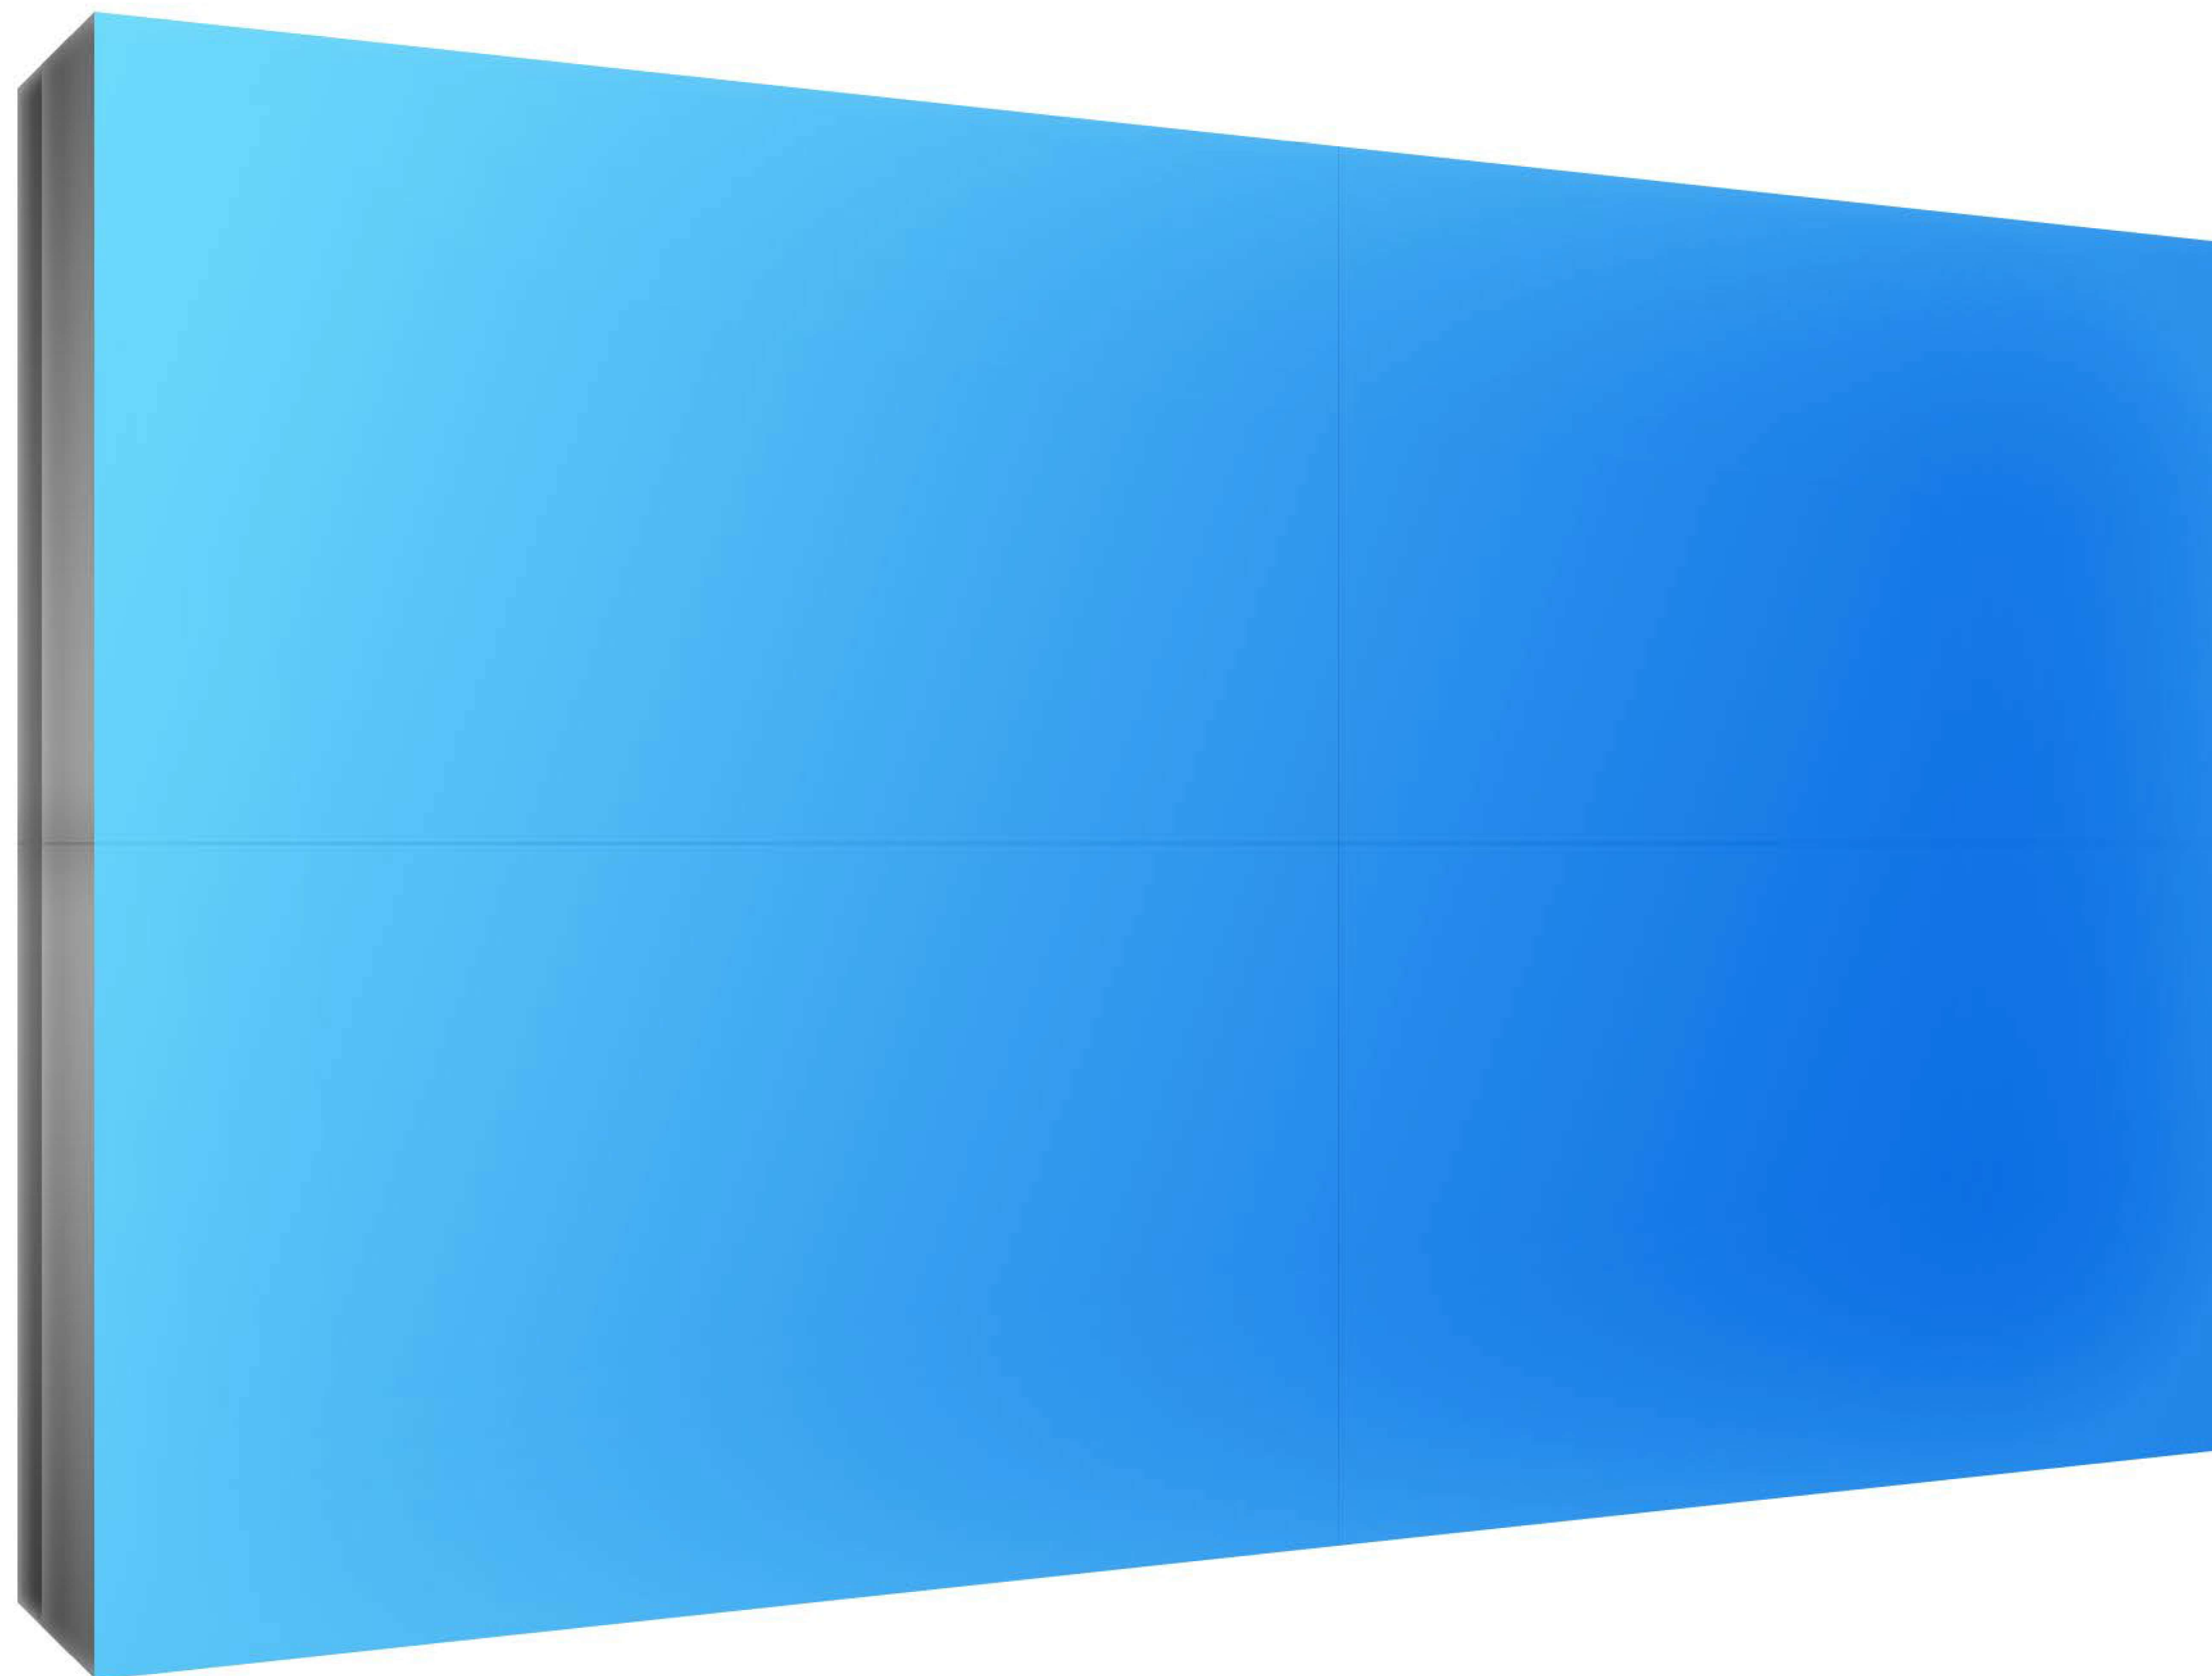

SPECIFICATIONS

Panel Size	55" DID LCD Screen(bezel less,with LED Backlight)
Aspect Ratio	16:09
Max Resolution Support	1920x1080
Pixel Pitch	0.63(H)×0.63 (V)
Colour	8Bit,16.7M
Brightness (nits)	500cd/m2
Contrast	3500:1
Visual Angle (H/V)	178°(H) / 178°(V)
Response Time	<=8ms
Life (hours)	>60,000(hrs)

IMAGE

Aspect Ratio	16:09
Quality Compensation Technology	LTI,CTI
Motion Compensation Technology	AUTO MOVE
Filter	3D comb filtering, digital noise reduction
Video Standard	PAL,NTSC

VIDEO WALL CONTROLLER (BUILT-IN TO EACH SCREEN)

Digital Signal Input	HDMI×1; 1920x1080@60Hz backward compatible
Digital Signal Input	DVI(DVI-I)×1; 1080P(1920×1080) backward compatible
Composite Video Input/(AV)	CVBS(BNC)×1
RJ45	2
USB	1 (optional)
Computer Centralised Control Interface	RS232

POWER	
Power Supply	AC100V ~ 240V
Max. Power Consumption	280W
Standby Power Consumption	< = 3W
STRUCTURE	
Border Dimension	Bezel less
External Dimension	1213.4mm x 684.2mm x 115.3mm
Net Weight	30KG
Shell Material	Metal-shell, Anti-static, Anti-magnetic, Anti-strong electric field interference
Installation	Wall mount, Floor standing, Hanging mount
TEMPERATURE	
Working Temperature	0°C ~ 50°C
Storage Temperature	-20°C ~ 65°C
Working Humidity	20% - 80%



[promultis]

Promultis 55" Bezel-less Video Wall Screen

