

Promultis Contour Kiosk

Engage your audience with this dynamic, curved Contour Kiosk. Ideal for digital signage or way finding solutions.

27" | 32" | 43" | 55" Screen Size



20 or 100 PCAP Touch Points



Integrated Android 13 OS



Optional i7 PC



Built-in Wi-Fi



HD/UHD 4K Back-Lit LED Screen



Secure PC Compartment



3 Year Warranty

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



Made in the UK

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

CHASSIS FEATURES	
Materials	Aluminium
Glass Type	Toughened
PANEL	
Interactive Area	27" 43" 55"
Panel Resolution	1080p Full HD or 4K UHD
Native Resolution	1920 x 1080 or 3840 x 2160 60Hz
Brightness (Nits)	450
Contrast Ratio	1500:1
Response Time	6ms
Aspect Ratio	16 x 9
Viewing Angle	178 °/ 178 °
Pixel Pitch	0.744(mm)
LCD Illumination	Backlit LED
Speaker	10W x2
ENVIRONMENT	
Operating Temperature	50 °F to 104 °F (10 °C to 40 °C)
Operating Humidity	10% to 80%, non-condensing
Storage Temperature	-4 °F to 113 °F (-20 °C to 45 °C)
Storage Humidity	5% to 95%, non-condensing
WARRANTY	
3 year repair or replace warranty as standard	

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



Made in the UK

For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

PROJECTED CAPACITIVE	
Detection Method	Projected Capacitive
Input method	Finger and Gloved Finger
Number of Simultaneous Touches	20, 40 or 100 Touches
Noise Shielding	27" 43" 55"
Aspect Ratio	16 x 9
Interface	HID
OS with Multitouch	Windows: Ubuntu 12.04; Android; Chrome OS
Data Connectivity	USB 2.0
Touch Accuracy	1mm Absolute
PERFORMANCE	
Substrate Thickness	Up to 6mm
Touch Response	5 Milliseconds
Calibration	Available using control panel: no drift
ENVIRONMENT	
Average Power Consumption (P)	USB powered @ 5V
	Peak consumption: 410 mA
	Operation consumption: 370mA
RELIABILITY	
Operating Temperature Range	-20°C to 70°C
Life Time Expectancy	Unlimited

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



Made in the UK

For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

SHIPPED WITH

Cables	Power USB HDMI
Remote Control	Included
User Manual	Included

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.





[promultis]



Made in the UK

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

55" Contour Kiosk

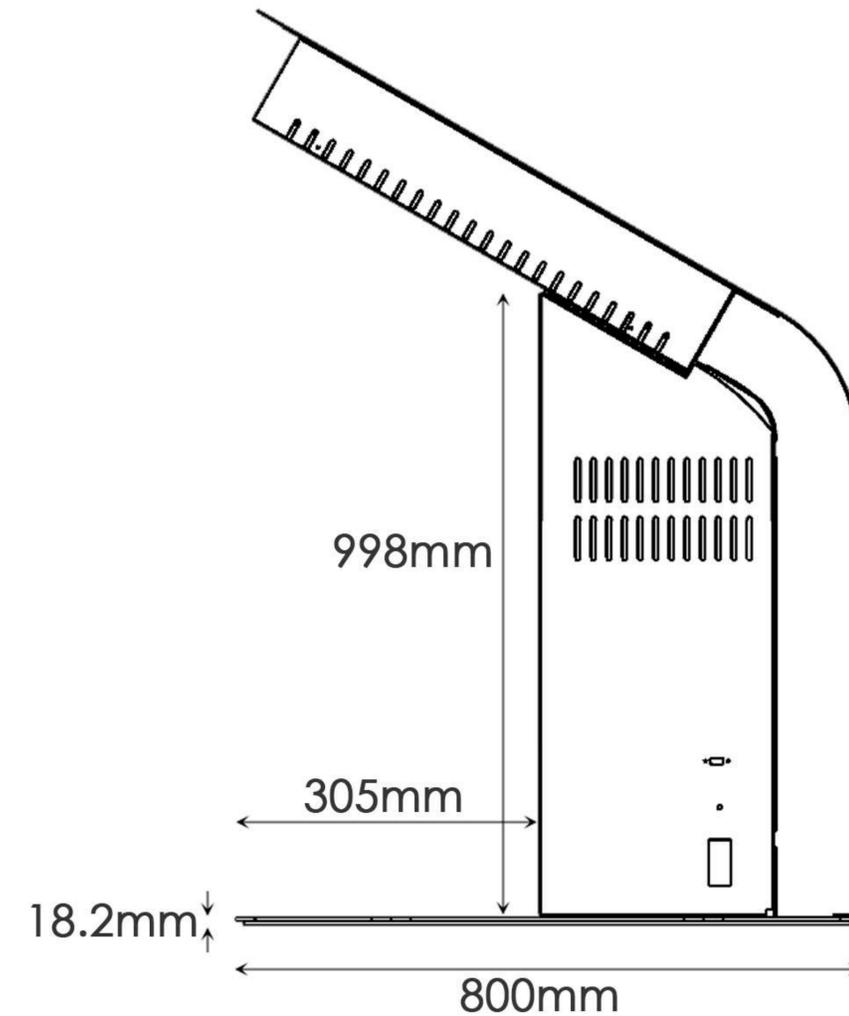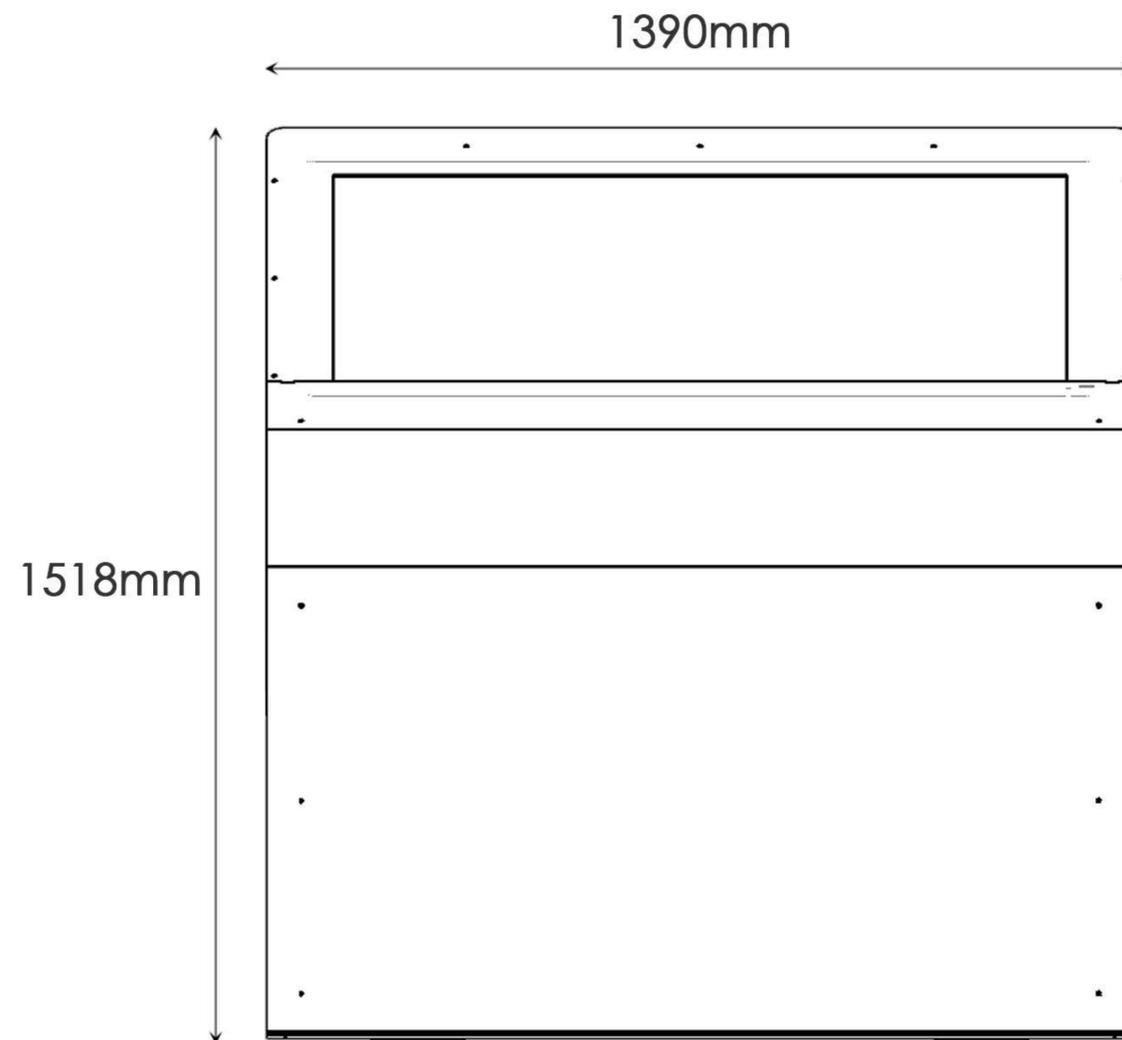

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.





[promultis]



For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

43" Contour Kiosk

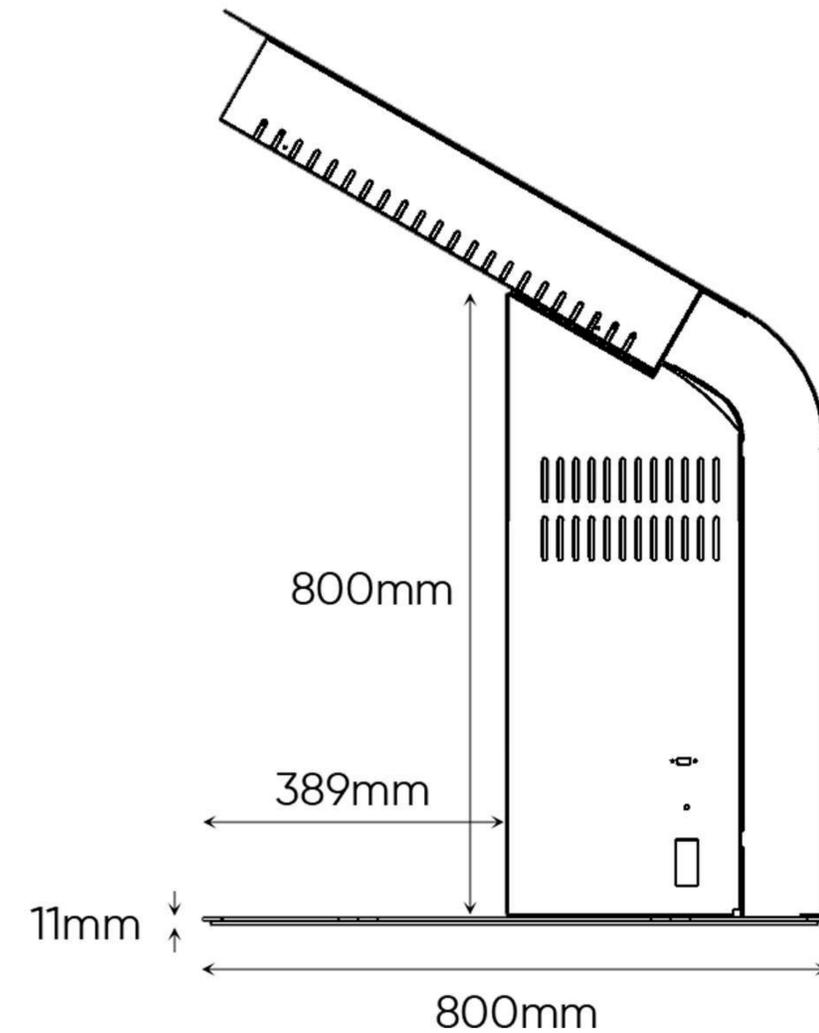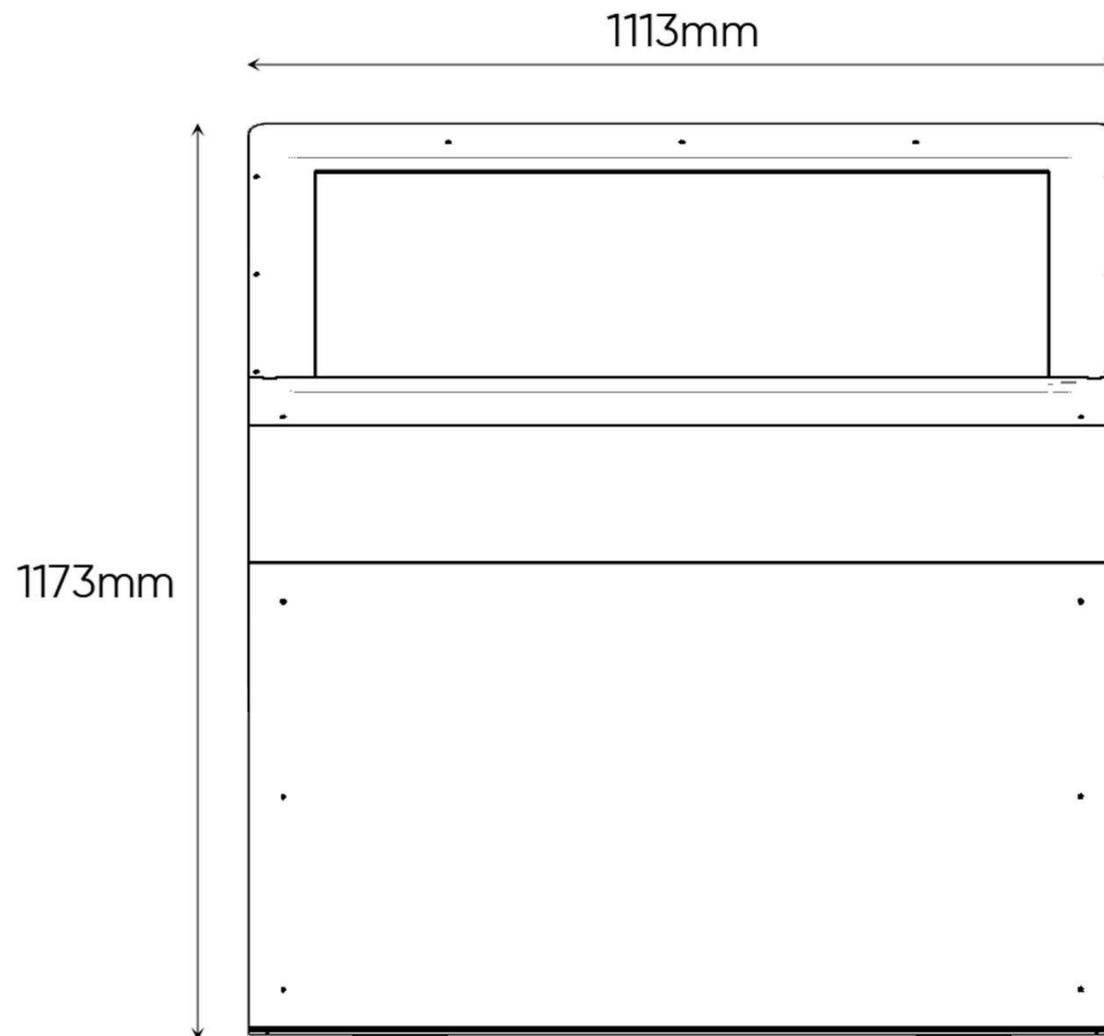

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794