



[promultis]

Geminus High Brightness Totem - IP66

Double-sided Floor Displays



55" & 65"
ACTIVE DISPLAY AREA



VGA, HDMI, USB, RS232 &
RJ45 CONNECTIVITY



MONITOR AND CONTROL DISPLAY
IN REAL TIME VIA THE CLOUD



10 TOUCH POINTS OPTION
+ CAMERA / NFC / RFID / ULTRASONIC / LED STRIP /
4G / WI-FI / BLUETOOTH / PRINTER / SCANNER /
POS / CHARGING GUN / SPEAKER OPTIONS



3 YEAR ON-SITE WARRANTY



3000 NITS, HIGH BRIGHTNESS,
LED 4K UHD SCREEN



LAMINATED TEMPERED GLASS



FULLY-SEALED ENCLOSURE WITH IP66 COMPLIANCE
TO ENSURE DUST FREE AND WATERPROOF



TEMPERATURE & HUMIDITY CONTROL SYSTEM



WINDOWS OS / ANDROID OS / TV BOARD



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

	GEMINUS55	GEMINUSOD65
Panel Size (inch)	55	65
LCD Manufacturer	Samsung / LG / AUO / Sharp / Keewin	
Active Display Area (w x h mm)	680 x 1210	803 x 1428
Resolution (pixel)	3840 x 2160	3840 x 2160
Aspect Ratio	16 : 9	16 : 9
Brightness (nits)	3000	3000
Contrast Ratio	3000 : 1	3000 : 1
Grey to Grey Response Time (ms)	5	5
Viewing Angle (H/V)	178° / 178°	
Backlight Configuration	Direct LED	
Operational Life Cycle-mtbf (hours)	60,000	
Surveillance Application		
Intelligent Diming	Yes	
Intelligent Cooling	Yes	
Temperature Error Alarm	Yes	
Screen Display Activity Error Alarm	Yes	
Door Open Alarm	Yes	
Fan Error Alarm	Yes	
No Working-Voltage	Yes	
Power		
Input Voltage	AC220/110 V ± 10%, 50 / 60 HZ	
Leakage Protection	30mA/0.1S	
Surge Protection	class B (II level classification test)	
Max Power Consumption (w)	610	1000


	GEMINUS55	GEMINUS65			
Panel Size (inch)	55	65			
Enclosure					
IP Rating	IP66	IP66			
Enclosure Material	Galvanized steel + zinc powder coating				
Enclosure Lifetime	5 years				
Glass Type	Laminated tempered glass				
Glass Type	Transmissivity > 93%, Reflectivity < 2%				
Unit Dimension (w x h x d mm)	785 x 2000 x 205	1000 x 2300 x 330			
Bezel Width (mm)	52.5	52.5			
Weight (kg)	142				
Environment					
Operating Environment	Exposure to direct sunlight, rain, snow and dust				
Operating Temperature	-40 °C ~ +50 °C				
Operating Humidity	5% ~ 98%				
Operating Altitude (m)	≤2000				
Media					
	CPU	Memory	Storage	OS	I/O
Windows OS	Core / Celeron / Atom	4 / 8 /16 / 32 Gb	128 / 256 / 512 Gb	Win 7/10 32/64bit	VGA / HDMI /USB / RS232 /RJ45
Android OS	Rockchip / Allwin	1 / 2 / 4 Gb	8 / 16 / 32 / 64 /128 Gb	Android 4.4 -8	VGA / HDMI /USB / RS232 /RJ45
TV Board	Mstar / NOATEK				VGA / HDMI /USB
Options	Touch Screen / Camera/ NFC / RFID / Ultrasonic / LED Strip / 4G / Wi-Fi / Bluetooth / Printer / Scanner / Pos / Charging Gun / Speaker				





[promultis]

SURVEILLANCE SYSTEM

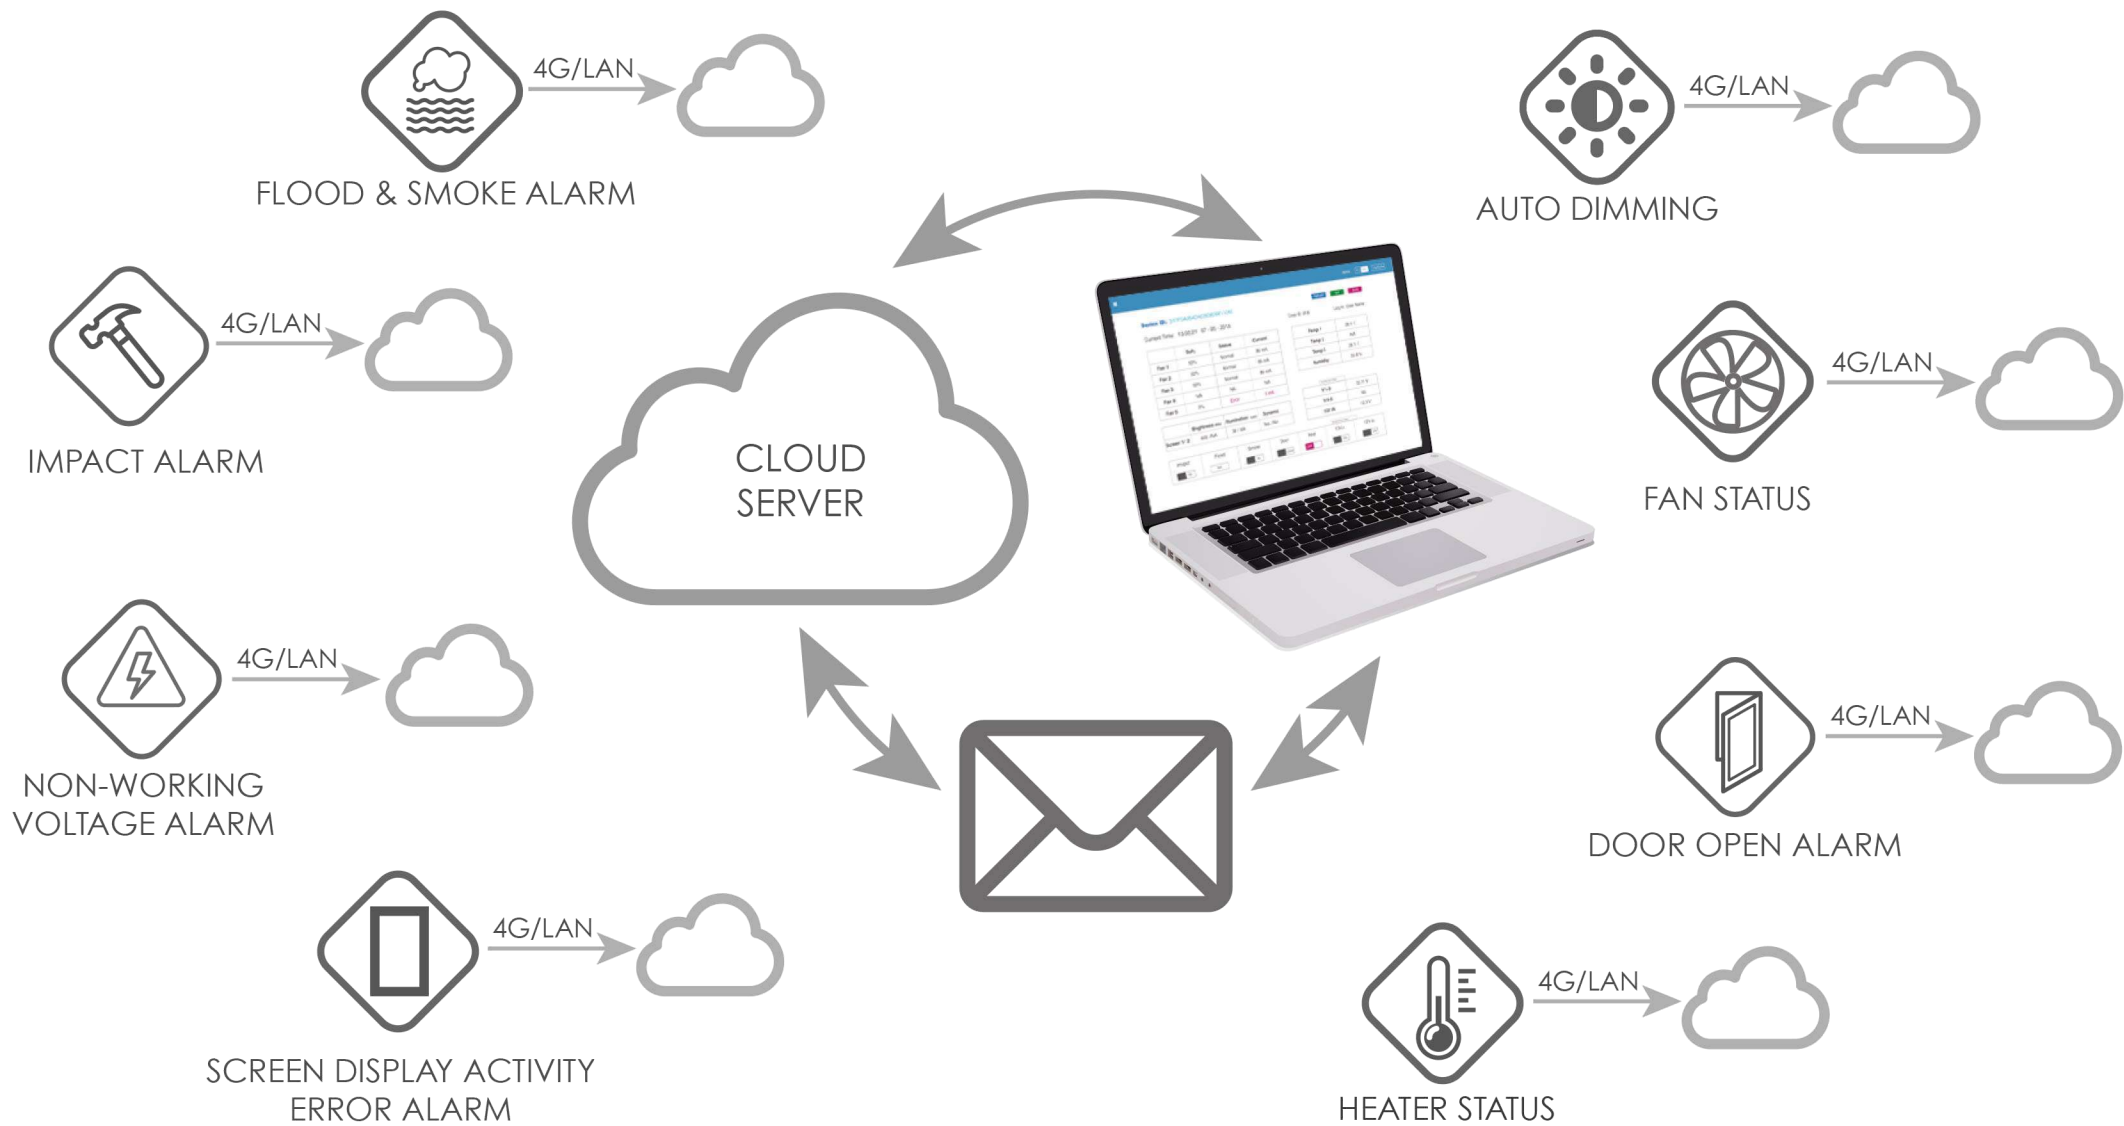

[promultis]
MULTITOUCH SOLUTIONS


For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

Geminus 55" High Brightness Totem

Double-sided Floor Displays

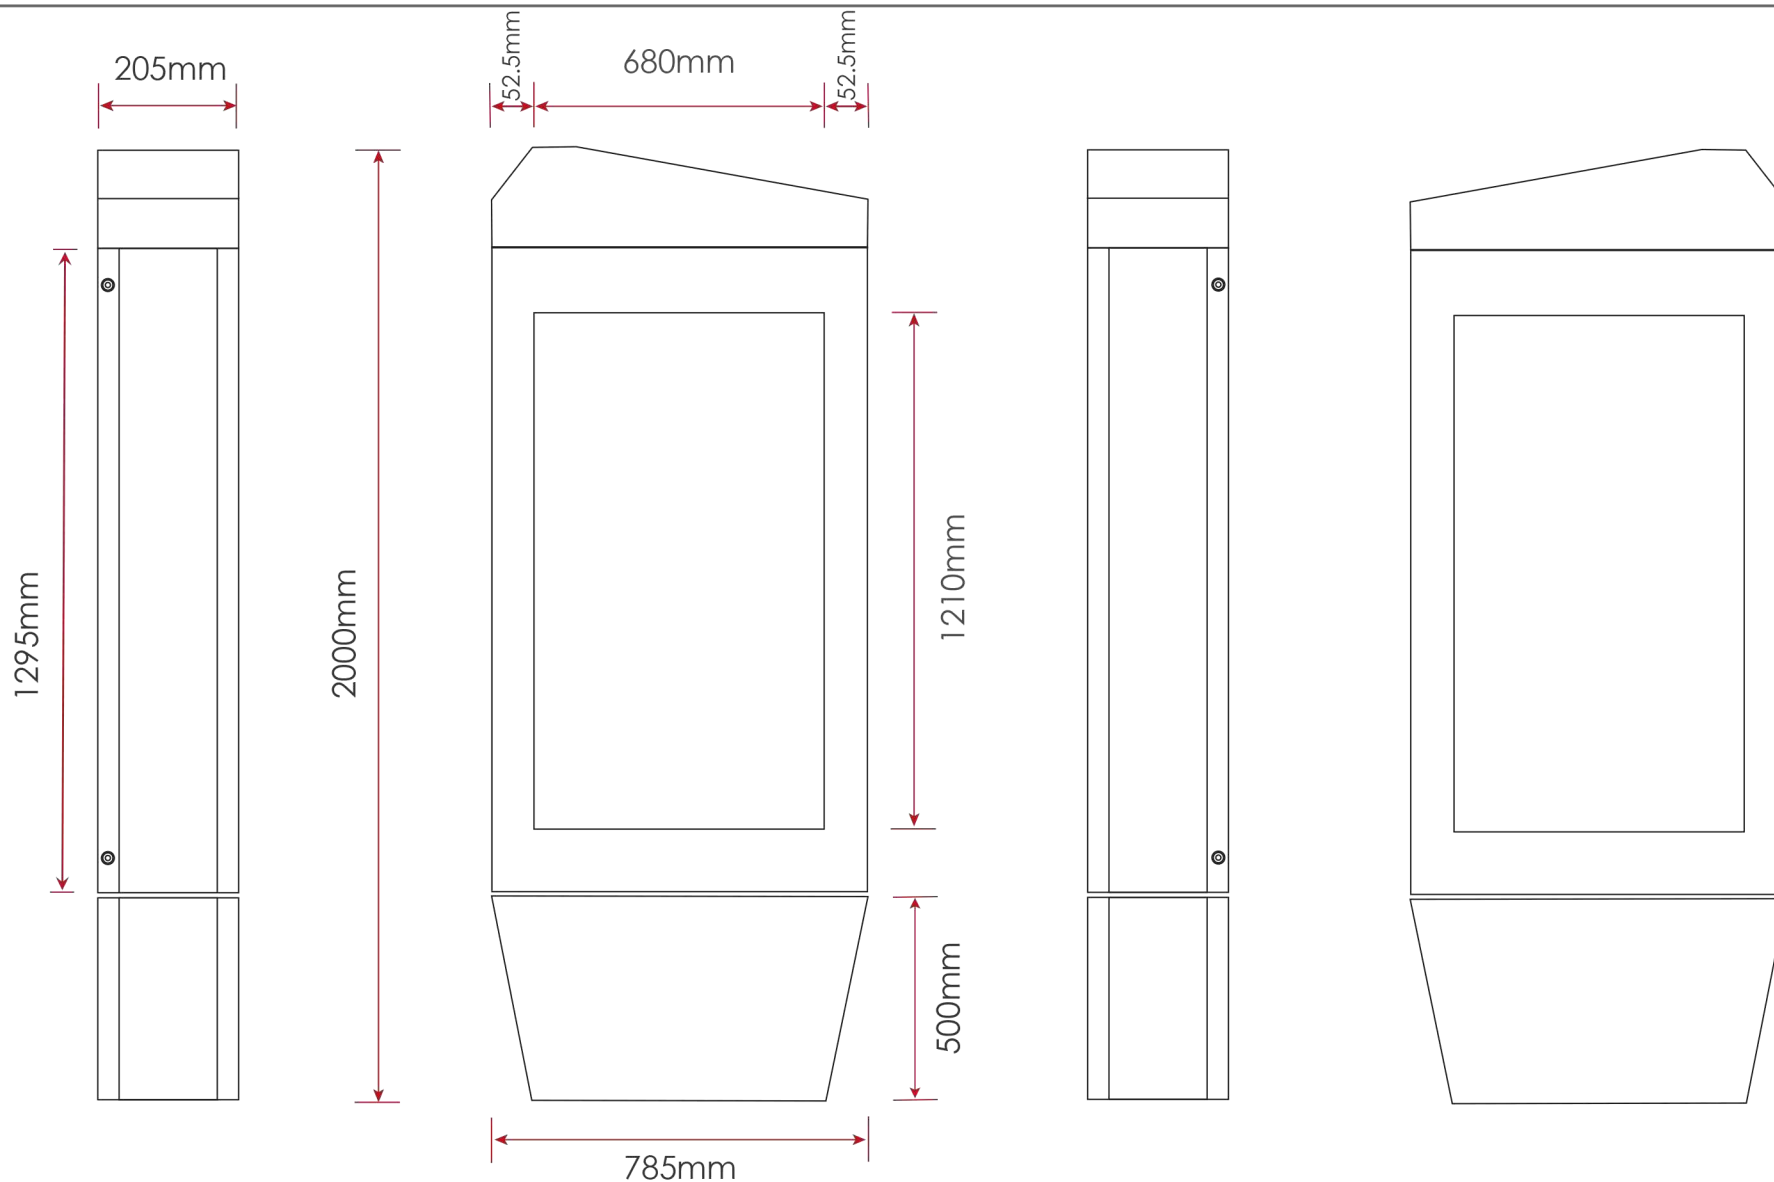

[promultis]
MULTITOUCH SOLUTIONS


For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

Geminus 65" High Brightness Totem

Double-sided Floor Displays

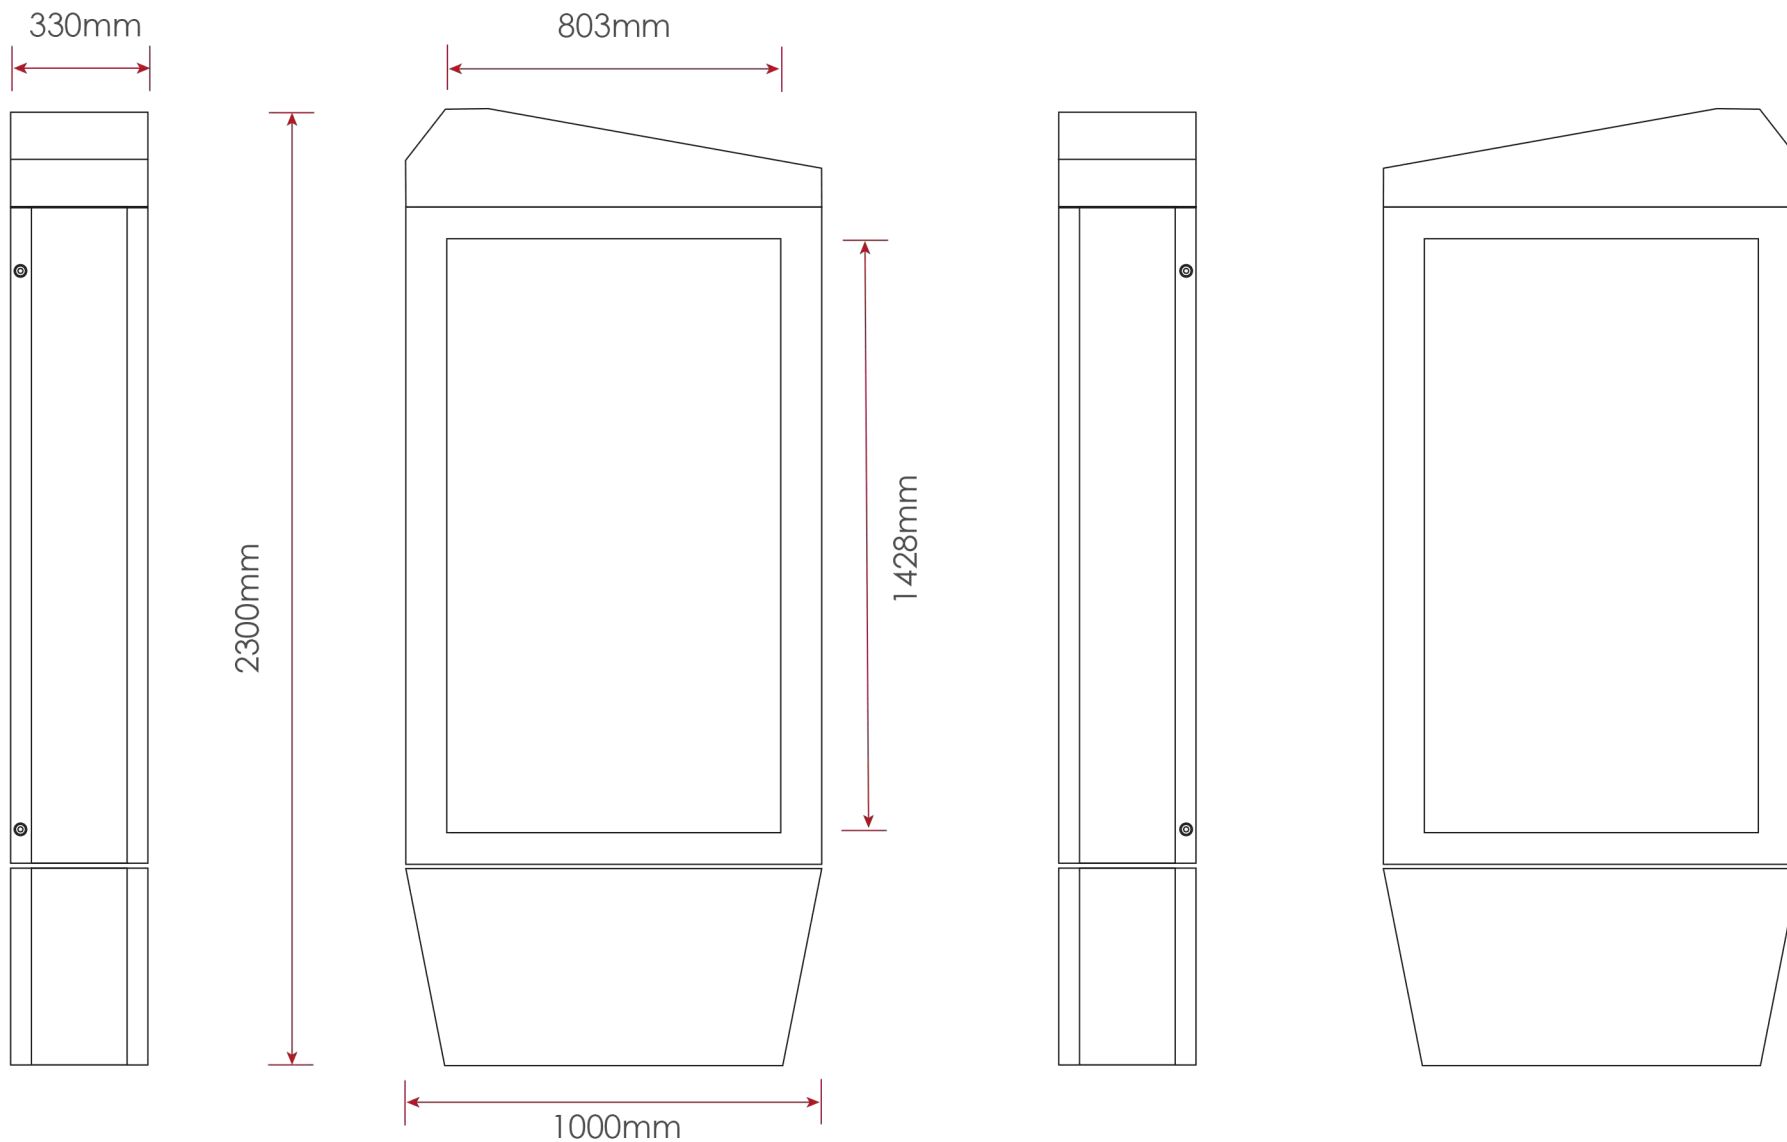

[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794