



[promultis]

Lucient Dual High Brightness LCD Displays

Dual Side Displays



43" - 55" - 65" - 75"
ACTIVE DISPLAY AREA



VGA, HDMI, USB, RS232 &
RJ45 CONNECTIVITY



OPTIONAL MONITORING CONTROL
IN REAL TIME VIA THE CLOUD



10 TOUCH POINTS OPTION
+ CAMERA / NFC / RFID / ULTRASONIC / LED STRIP /
4G / WI-FI / BLUETOOTH / PRINTER / SCANNER /
POS / CHARGING GUN / SPEAKER OPTIONS



3 YEAR ON-SITE WARRANTY



3000 NITS, HIGH BRIGHTNESS,
UP TO 4K UHD RESOLUTION



TEMPERED GLASS



FULLY-SEALED ENCLOSURE WITH IP65 COMPLIANCE
TO ENSURE DUST FREE AND WATERPROOF



TEMPERATURE CONTROL SYSTEM



WINDOWS OS / ANDROID OS / TV BOARD



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

	LUCIENT 43D	LUCIENT 55D	LUCIENT 65D	LUCIENT 75D
Panel Size (inch)	43	55	65	75
Active Display Area (w x h mm)	942 x 530	1210 x 680	1428 x 803	1650 x 928
Resolution (Pixel)	1920 x 1080	3840 x 2160	3840 x 2160	3840 x 2160
Brightness (Nits)	3000			
Contrast Ratio	3000:1			
Response Time	5ms			
Aspect Ratio	16 x 9			
Viewing Angle	178 °/ 178 °			
LCD Illumination	Automatic Light Sensor			
Operational Life Cycle-mtbf	60,000 hrs			
SURVEILLANCE APPLICATION				
Intelligent Diming	Yes			
Intelligent Cooling	Yes			
Temperature Error Alarm	Yes			
Screen Display Activity Error Alarm	Yes			
Door Open Alarm	Yes			
Fan Error Alarm	Yes			
No Working-Voltage	Yes			
POWER				
Input Voltage	AC100~240V 50 / 60 HZ			
Leakage Protection	30mA/0.1S			
Surge Protection	Class B (II level classification test)			
Max Power Consumption (w)	300			

	LUCIENT 43D	LUCIENT 55D	LUCIENT 65D	LUCIENT 75D
Panel Size (Inch)	43	55	65	75
ENCLOSURE				
IP Rating	IP65			
Enclosure Material	Aluminum + Galvanized Steel + Zinc power coating			
Enclosure Lifetime	5 Years			
Glass Type	Tempered Glass			
Glass Characteristics	Transmissivity > 93%, Reflectivity < 2%			
Unit Dimension (w x h x d mm)	582 x 1966 x 258	680 x 1970 x 258	856 x 2222 x 258	Call Us For Info
Bezel Width (mm)	26			
Weight (kg)	Call Us For Info	360	430	500
ENVIROMENT				
Operating Enviroment	Exposure to direct sunlight, rain, snow and dust			
Operating Temperature	- 20 °C ~ + 50 °C			
Operating Humidity	5% ~ 98%			
Operating Altitude (m)	<2000			
MEDIA				
	CPU	Memory	Storage	OS
Windows OS	Core / Celeron / Atom	4 / 8 / 16 / 32 GB	128GB / 256 / 512 GB	Win 7/11 32/64bit
Android OS	Rockchip / Allwin	1 / 2 / 4 GB	8 / 16 / 32 / 64 / 128GB	Android 4.4 - 13
TV Board	Mstar / NOATEK			
Options	Touch Screen / Camera / NFC / RFID / Ultrasonic / LED Strip / 4G / WIFI / Bluetooth / Printer / Scanner / POS / Charging Gun / Speaker			






[promultis]

Lucient Dual 65" High Brightness LCD Display

Dual Side Display

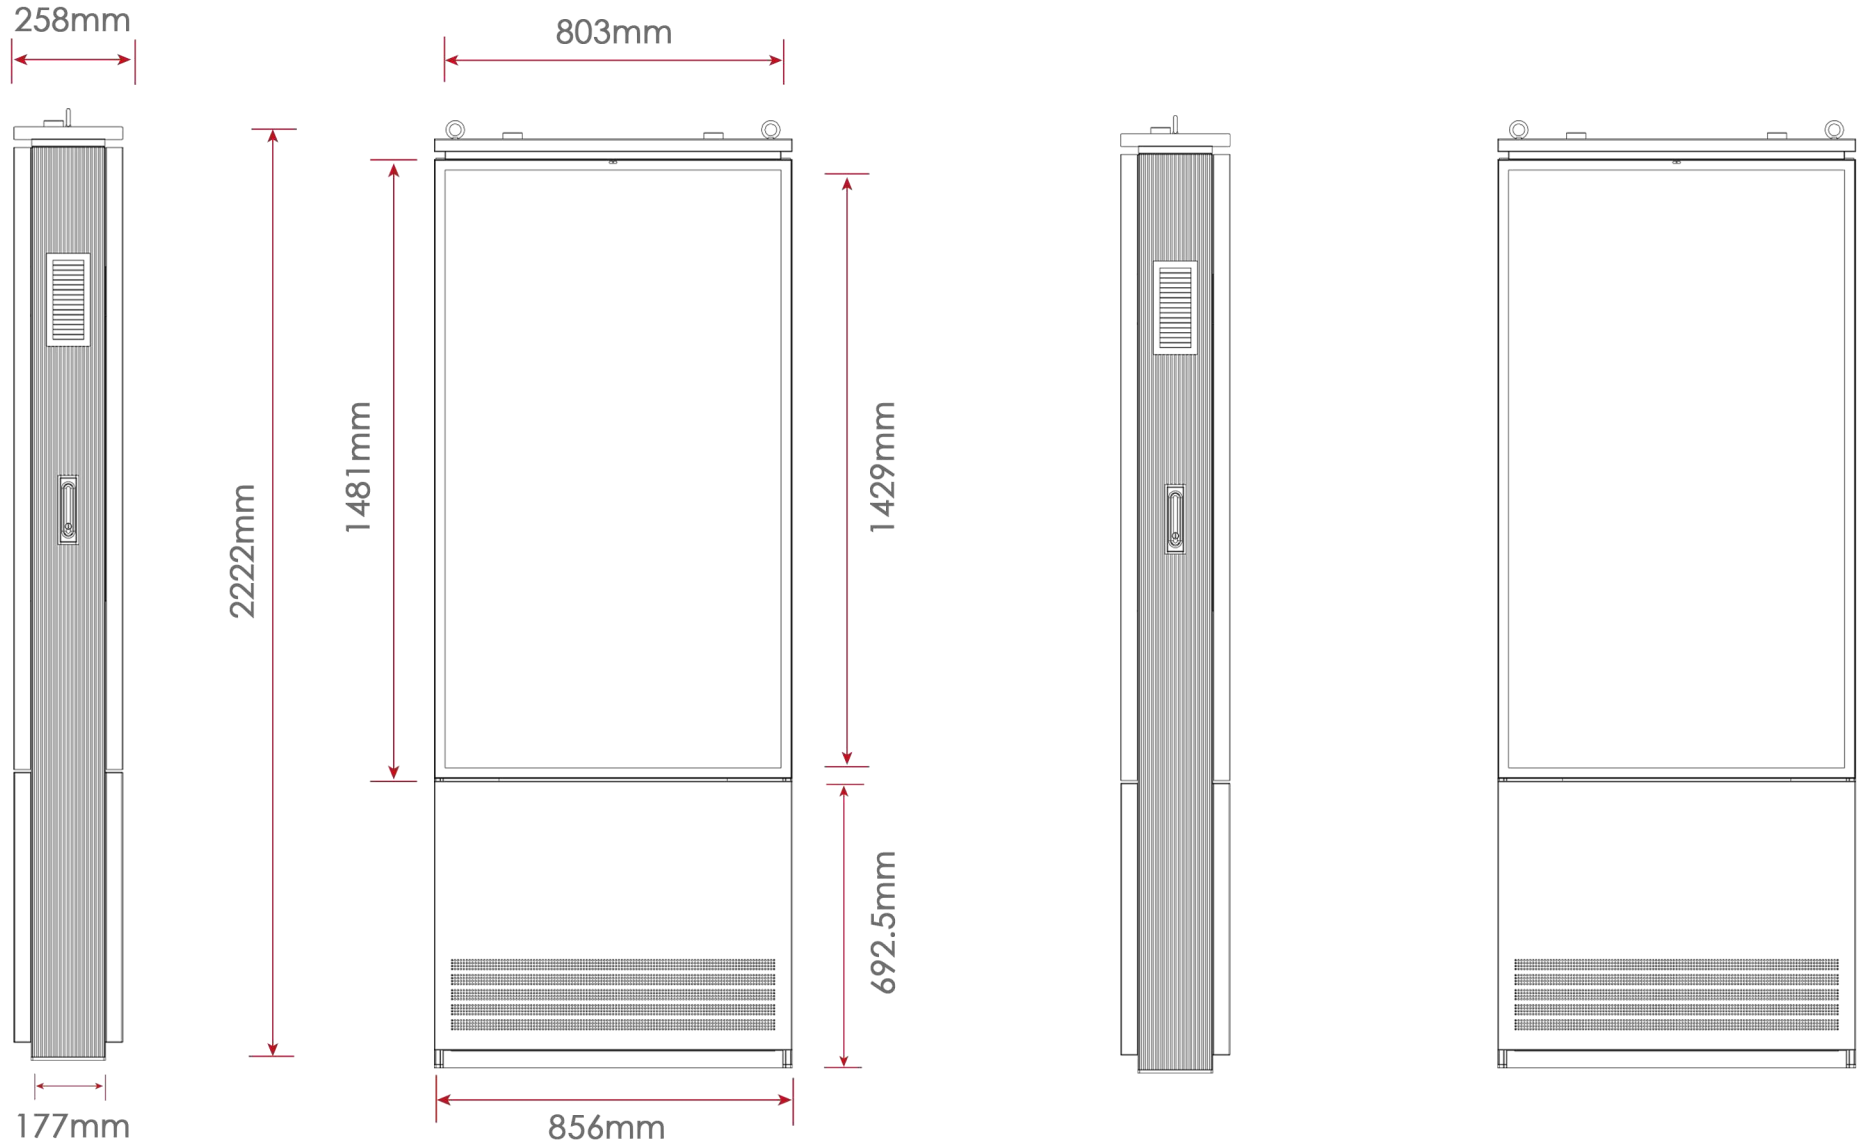

[promultis]
MULTITOUCH SOLUTIONS


For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

Lucient Dual 55" High Brightness LCD Display

Dual Side Display

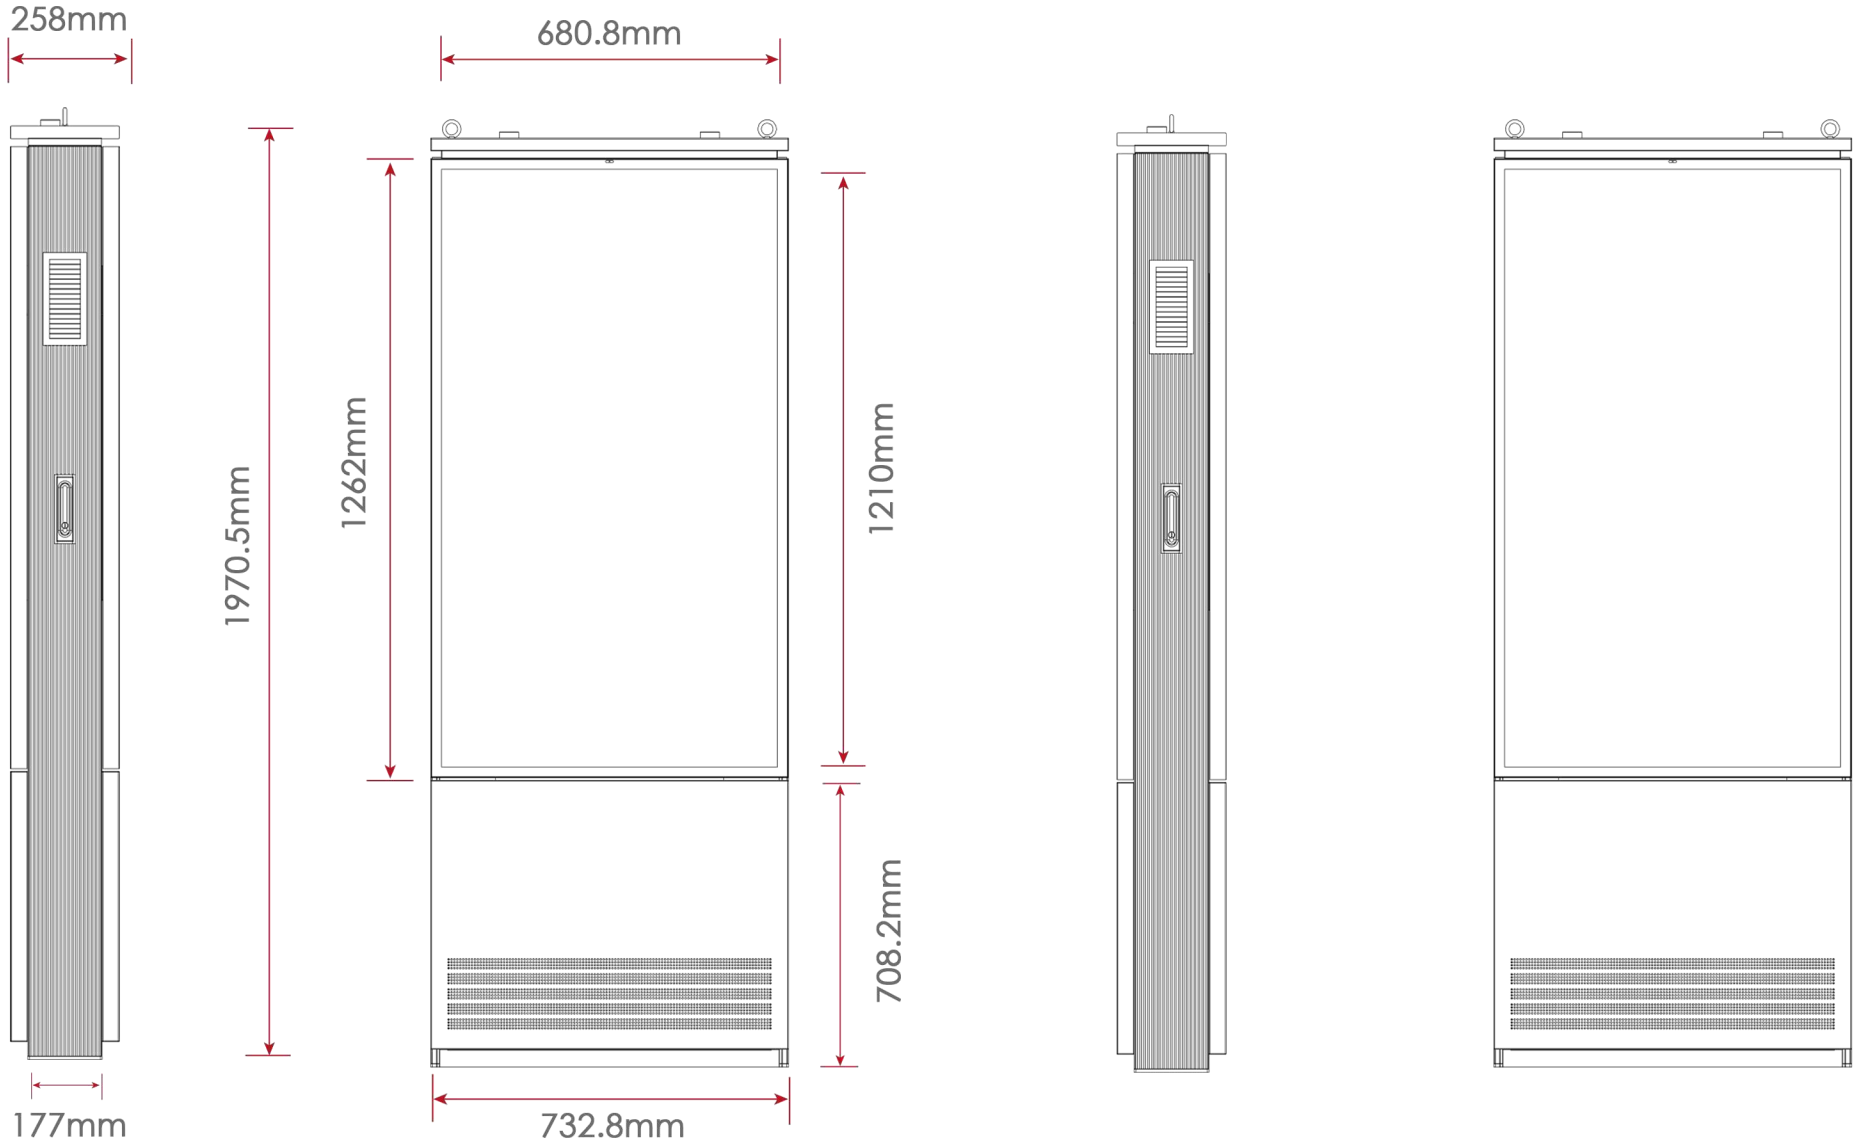

[promultis]
MULTITOUCH SOLUTIONS


For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

Lucient Dual 43" High Brightness LCD Display

Dual Side Display

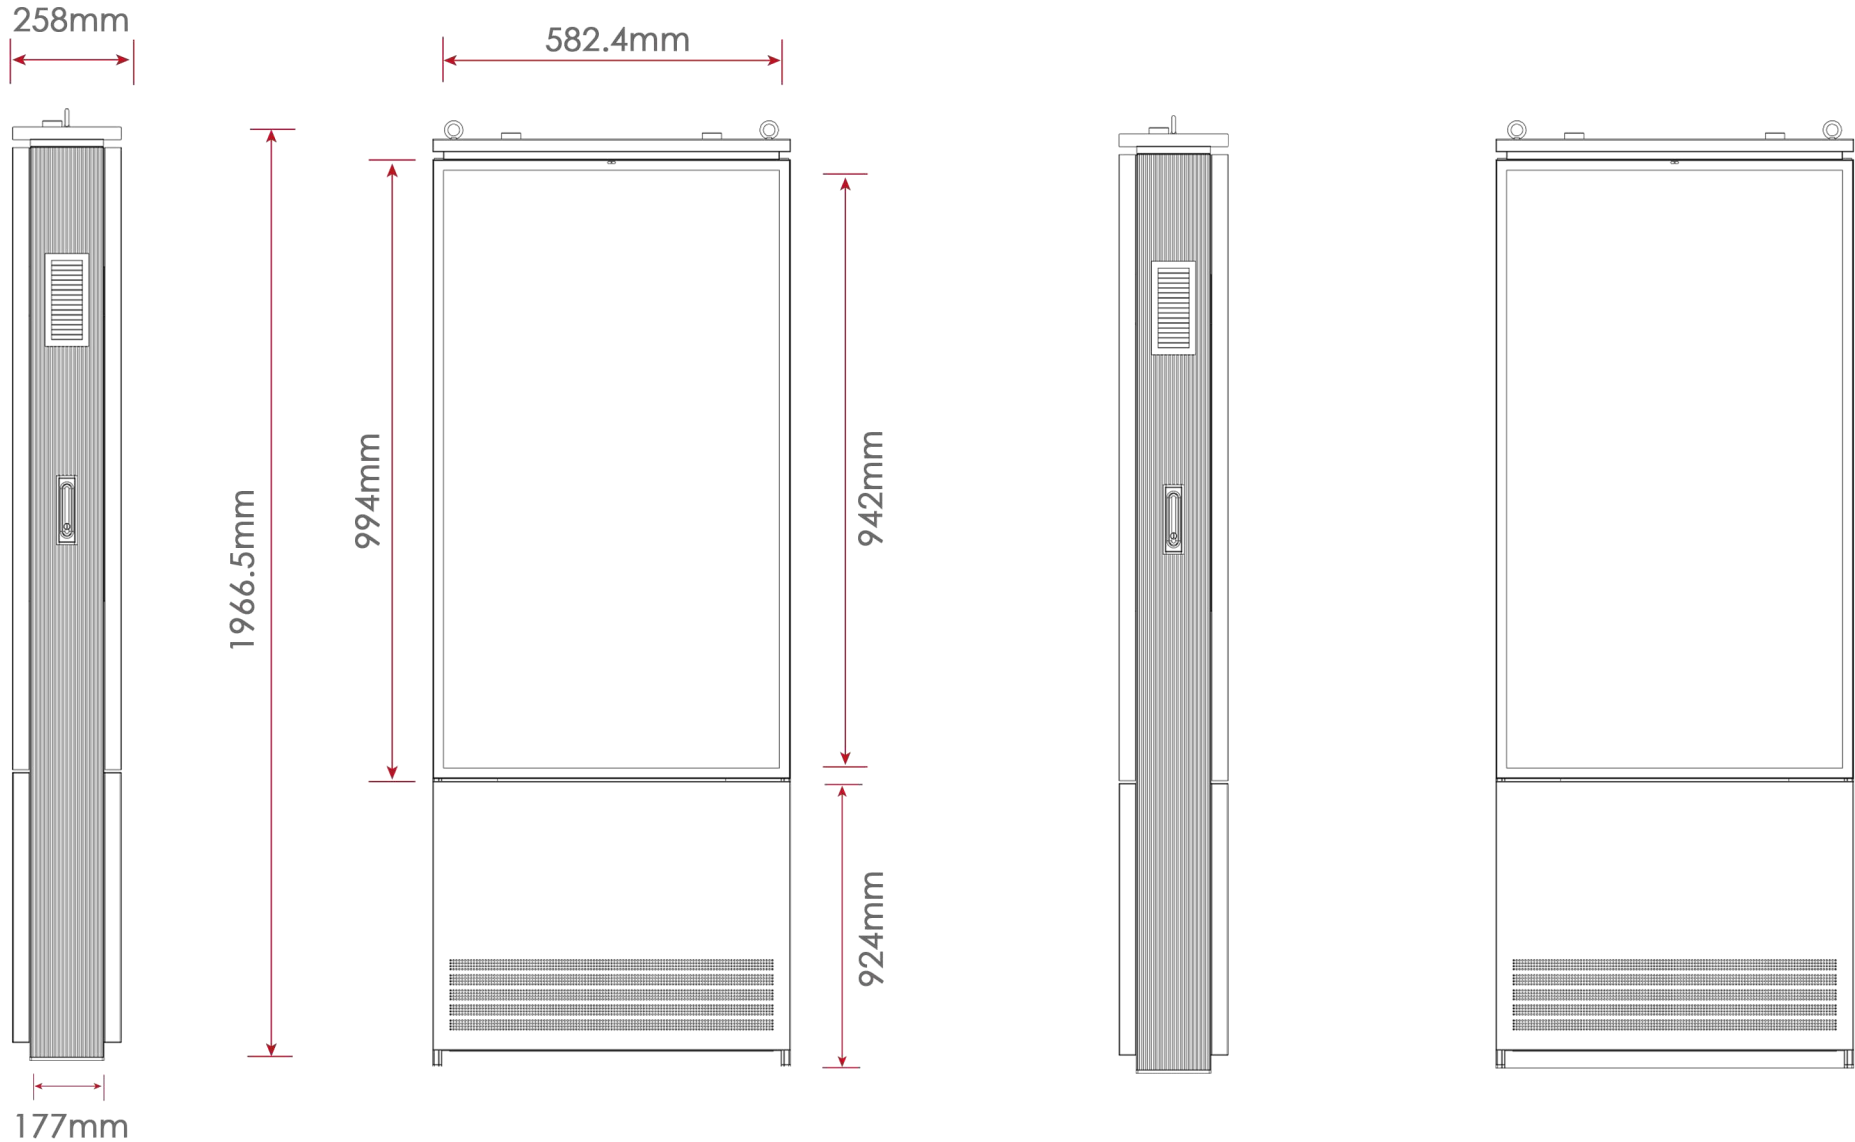

[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794