
Promultis P1.86 Permanent LED Video Wall

This LED Video Wall Solution Features a Precise 1.86mm Pixel Pitch for Sharp, Clear Visuals, supported by a High Brightness of 600-900cd/sqm and a Rapid 384Hz Refresh Rate.



Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



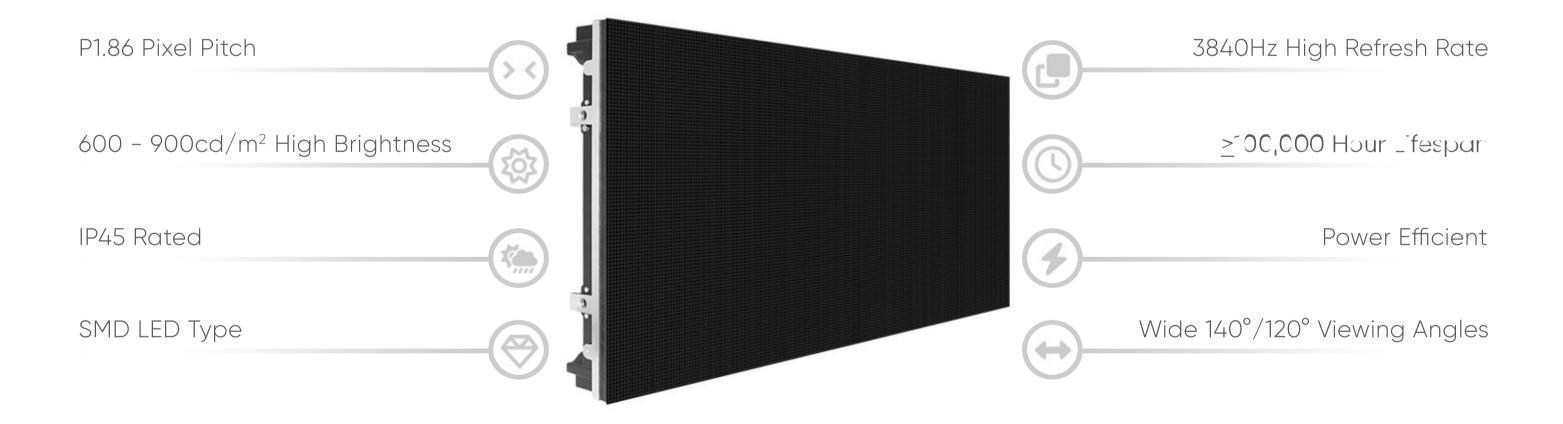

LED MODULE		
Pixel Pitch	1.86mm	
Pixel configuration	1RGB	
LED Type	SMD 1515 Lamp	
LED Module Size	320 x 160mm	
Pixels per sqm.	288,888 pixels	
Display Refresh Rate	3840Hz	
Scan Mode	43 Scan	
Brightness	600~900cd/sqm	
Viewing Angle	H: 140 degrees /V: 120 degrees	
LED CABINET		
LED Cabinet Dimensions	640 x 480mm	
LED Cabinet Weight	6.8KG	
LED Cabinet Resolution	320 x 160	
IP Rating	IP45	
LED Cabinet Area	0.3072 sqm	
Serviceability	Front Service	
POWER SUPPLY		
Power Consumption (Max)	580 Watts/sqm	
Power Consumption (Average)	180 Watts/sqm	
Input Voltage	AC110V or 220V +/- 10%	

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.





OPERATION	
Storage Environment	Temperature: -40 ° C ~ 60 ° C / Humidity: 10% ~ 85% RH
Operating Environment	Temperature: -20 ° C ~ 50 ° C / Humidity: 10% ~ 90% RH
Lifespan (Typical)	≥100,000 Hours
MTBF	≥10,000 Hours
Source Compatibility	CVBS, YC, YUV, RGB, DVI, SDI, HD-SDI, HDMI

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



