

Promultis Totem DUO

The Promultis Totem Duo is a double-sided interactive totem available in sizes from 43" to 65", featuring 10 Touch Points and integrated Android 13.


43"- 65" Dual PCAP Touchscreens




Android 13 OS




HDMI, USB & More Connectivity




4K Ultra High-Definition Display



>60,000 Hour Lifespan



Excellent 3000:1 Contrast Ratio



Dual Optional i7 OPS PC's



Wide 178°/178° Viewing Angles



Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

43" Totem DUO

SPECIFICATIONS	
Panel size	43" IPS-LCD
Display area(mm)/mode	529(W)x529(H) 16:9
Maximum resolution	3840x2160
Display color	16.7M
Pixel Pitch(mm)	0.49(H)x0.49(H)
Brightness (nits)	350cd/M ²
Contrast	3000:1
Visual angle	178°/178°
Response time	5ms
Life (hrs)	>60,000(hrs)
INPUT & OUTPUT	
HDMI	2
USB	4
VGA	2
LAN	2
Audio	2
Earphone	2
Speaker	4x5W(9Ω)
VIDEO	
Color system	PAL/NTSC/SECAM

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

43" Totem DUO

POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤240W
Standby power consumption	<5W
TEMPERATURE	
Working temperature	0 ° C ~ 50 ° C
Storage temperature	-20 ° C ~ 60 ° C
Working humidity	85%
Storage humidity	85%
ANDRIOD SPECIFICATIONS	
Andriod system	Google Android 13 support multi-language
Storage	4G DDR3
CPU	4-Core ARM Cortex-A55/2.0 Ghz
Flash	32G
APPEARANCE	
Color/appearance	White,black,customized
Case	Metal case SPCC
Installation	Floor standing
Quality Standard	CE,CCC
TOUCH PANEL	
Specification	Capacitive touch

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

43" Totem DUO

Positioning accuracy	±2mms
Transmittance	≥92%
Hardness	7H
Click manner	10 points touch
Response time	≤10ms
Life time	More than 600 million times
DETAILED FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P/2160P

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

49" Totem DUO

SPECIFICATIONS	
Panel size	49" IPS-LCD
Display area(mm)/mode	604(W)x1073(H) 16:9
Maximum resolution	3840x2160
Display color	16.7M
Pixel Pitch(mm)	0.37(H)x0.37(V)
Brightness (nits)	350cd/m ²
Contrast	3000:1
Visual angle	178°/178°
Response time	5ms
Life (hrs)	>60,000(hrs)
INPUT & OUTPUT	
HDMI	2
USB	4
VGA	2
Lan	2
Audio	2
Earphone	2
Speaker	4 X 5W (9 OHM)
VIDEO	
Color system	PAL/NTSC/SECAM

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

49" Totem DUO

POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤280W
Standby power consumption	<5W
TEMPERATURE	
Working temperature	0 ° C ~ 50 ° C
Storage temperature	-20 ° C ~ 60 ° C
Working humidity	85%
Storage humidity	85%
ANDRIOD SPECIFICATIONS	
Andriod system	Google Android 13 support multi-language
Storage	4G DDR3
CPU	4-Core ARM Cortex-A55/2.0 Ghz
Flash	32G
APPEARANCE	
Color/appearance	White,black,customized
Case	Metal case SPCC
Installation	Floor standing
Quality Standard	CE,CCC
TOUCH PANEL	
Specification	Capacitive touch

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

49" Totem DUO

Positioning accuracy	±2mms
Transmittance	≥92%
Hardness	7H
Click manner	10 points touch
Response time	≤10ms
Life time	More than 600 million times
DETAILED FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P/2160P

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

55" Totem DUO

SPECIFICATIONS	
Panel size	55" IPS-LCD
Display area(mm)/mode	680(W)x1209(H) 16:9
Maximum resolution	3840x2160
Display color	16.7M
Pixel Pitch(mm)	0.43(H)x0.43(V)
Brightness (nits)	350cd/m ²
Contrast	3000:1
Visual angle	178°/178°
Response time	5ms
Life (hrs)	>60,000(hrs)
INPUT & OUTPUT	
HDMI	2
USB	4
VGA	2
Lan	2
Audio	2
Earphone	2
Speaker	4X 5W (9 OHM)
VIDEO	
Color system	PAL/NTSC/SECAM

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

55" Totem DUO

POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤180W
Standby power consumption	<5W
TEMPERATURE	
Working temperature	0 ° C ~ 50 ° C
Storage temperature	-20 ° C ~ 60 ° C
Working humidity	85%
Storage humidity	85%
ANDRIOD SPECIFICATIONS	
Andriod system	Google Android 13 support multi-language
Storage	4G DDR3
CPU	Dual core 1.8 Ghz/quad-core 982
Flash	32G
APPEARANCE	
Color/appearance	White,black,customized
Case	Metal case SPCC
Installation	Floor standing
Quality Standard	CE,CCC
TOUCH PANEL	
Specification	Capacitive touch

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

55" Totem DUO

Positioning accuracy	±2mms
Transmittance	≥92%
Hardness	7H
Click manner	10 points touch
Response time	≤10ms
Life time	More than 600 million times
DETAILED FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P/2160P

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

65" Totem DUO

SPECIFICATIONS	
Panel size	65" IPS-LCD
Display area(mm)/mode	1428mm(H)x803mm(V) 16:9
Maximum resolution	3840x2160
Display color	16.7M
Pixel Pitch(mm)	0.372(H)x0.372(V)
Brightness (nits)	350cd/m ²
Contrast	3000:1
Visual angle	178°/178°
Response time	5ms
Life(hrs)	>60,000(hrs)
INPUT & OUTPUT	
HDMI	2
USB	4
VGA	2
Lan	2
Audio	2
Earphone	2
Speaker	2 X 5W (9 OHM)
VIDEO	
Color system	PAL/NTSC/SECAM

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

65" Totem DUO

POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤400W
Standby power consumption	<5W
TEMPERATURE	
Working temperature	0 ° C ~ 50 ° C
Storage temperature	-20 ° C ~ 60 ° C
Working humidity	85%
Storage humidity	85%
ANDRIOD SPECIFICATIONS	
Andriod system	Google Android 13 support multi-language
Storage	4G DDR3
CPU	4-Core ARM Cortex-A55/2.0 Ghz
Flash	32G
APPEARANCE	
Color/appearance	White,black,customized
Case	Metal case SPCC
Installation	Floor standing
Quality Standard	CE,CCC
TOUCH PANEL	
Specification	Capacitive touch

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

65" Totem DUO

Positioning accuracy	±2mms
Transmittance	≥92%
Hardness	7H
Click manner	10 points touch
Response time	≤10ms
Life time	More than 600 million times
DETAILED FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P/2160P


Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

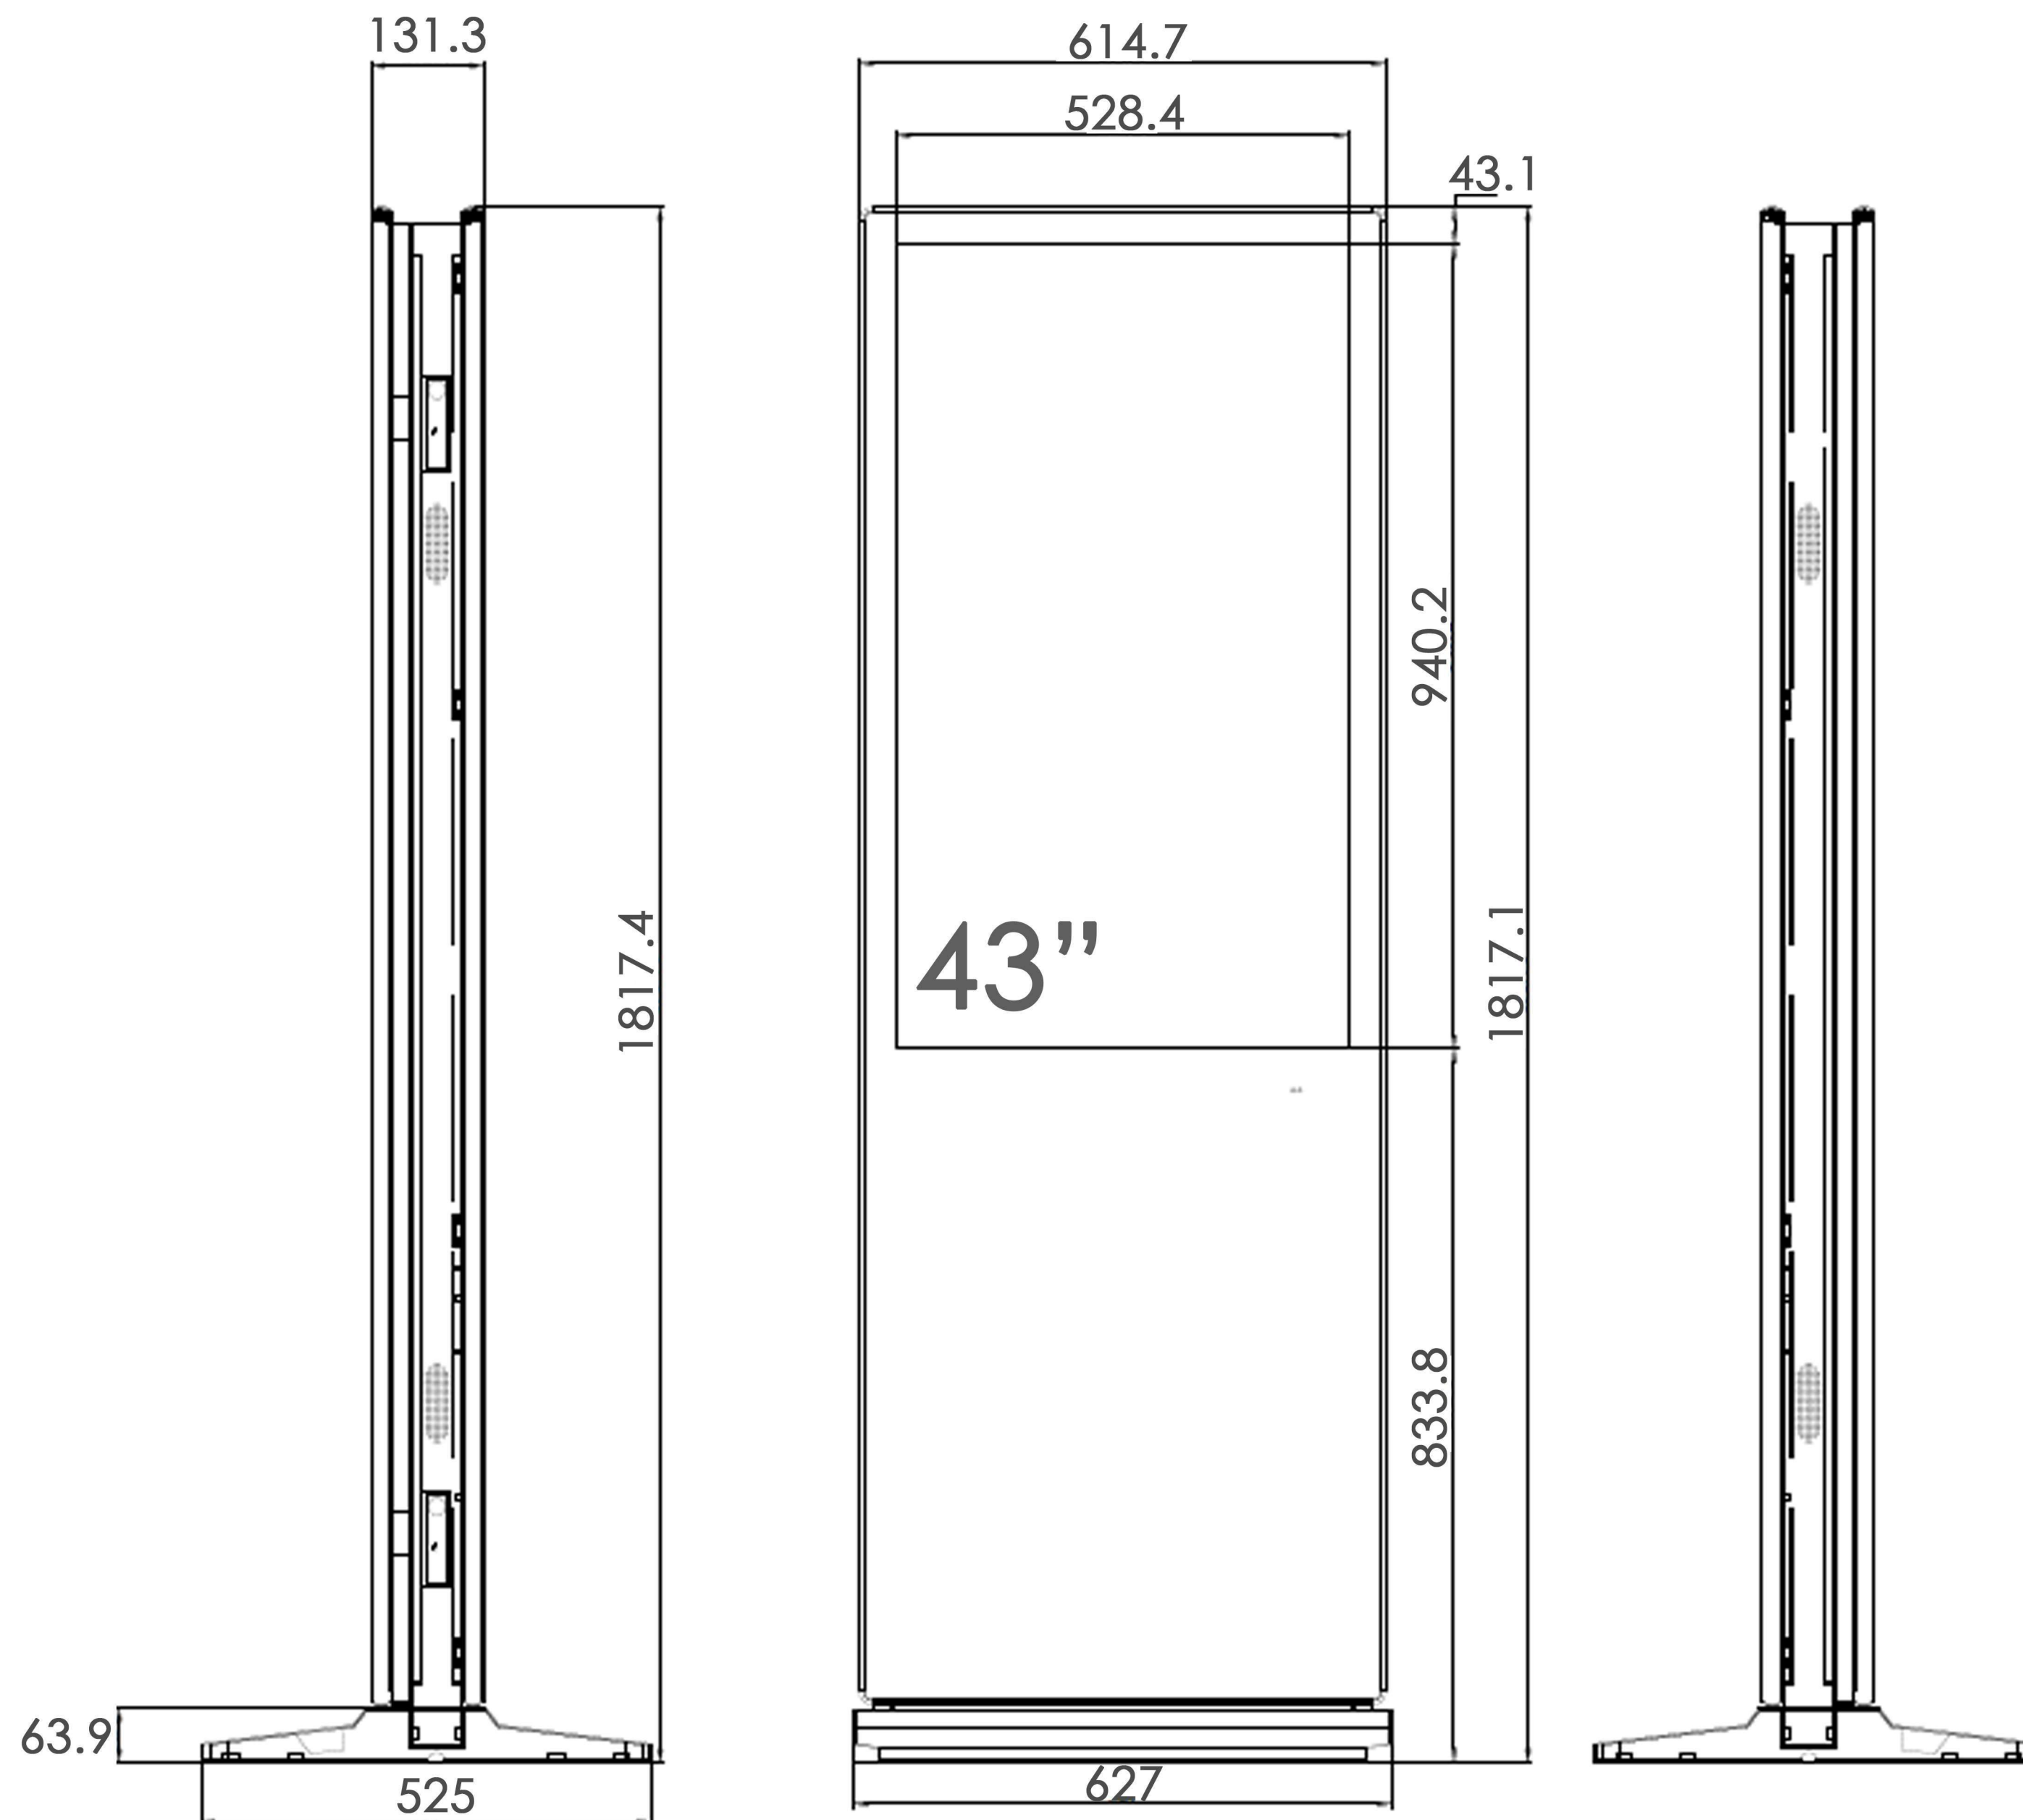


Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

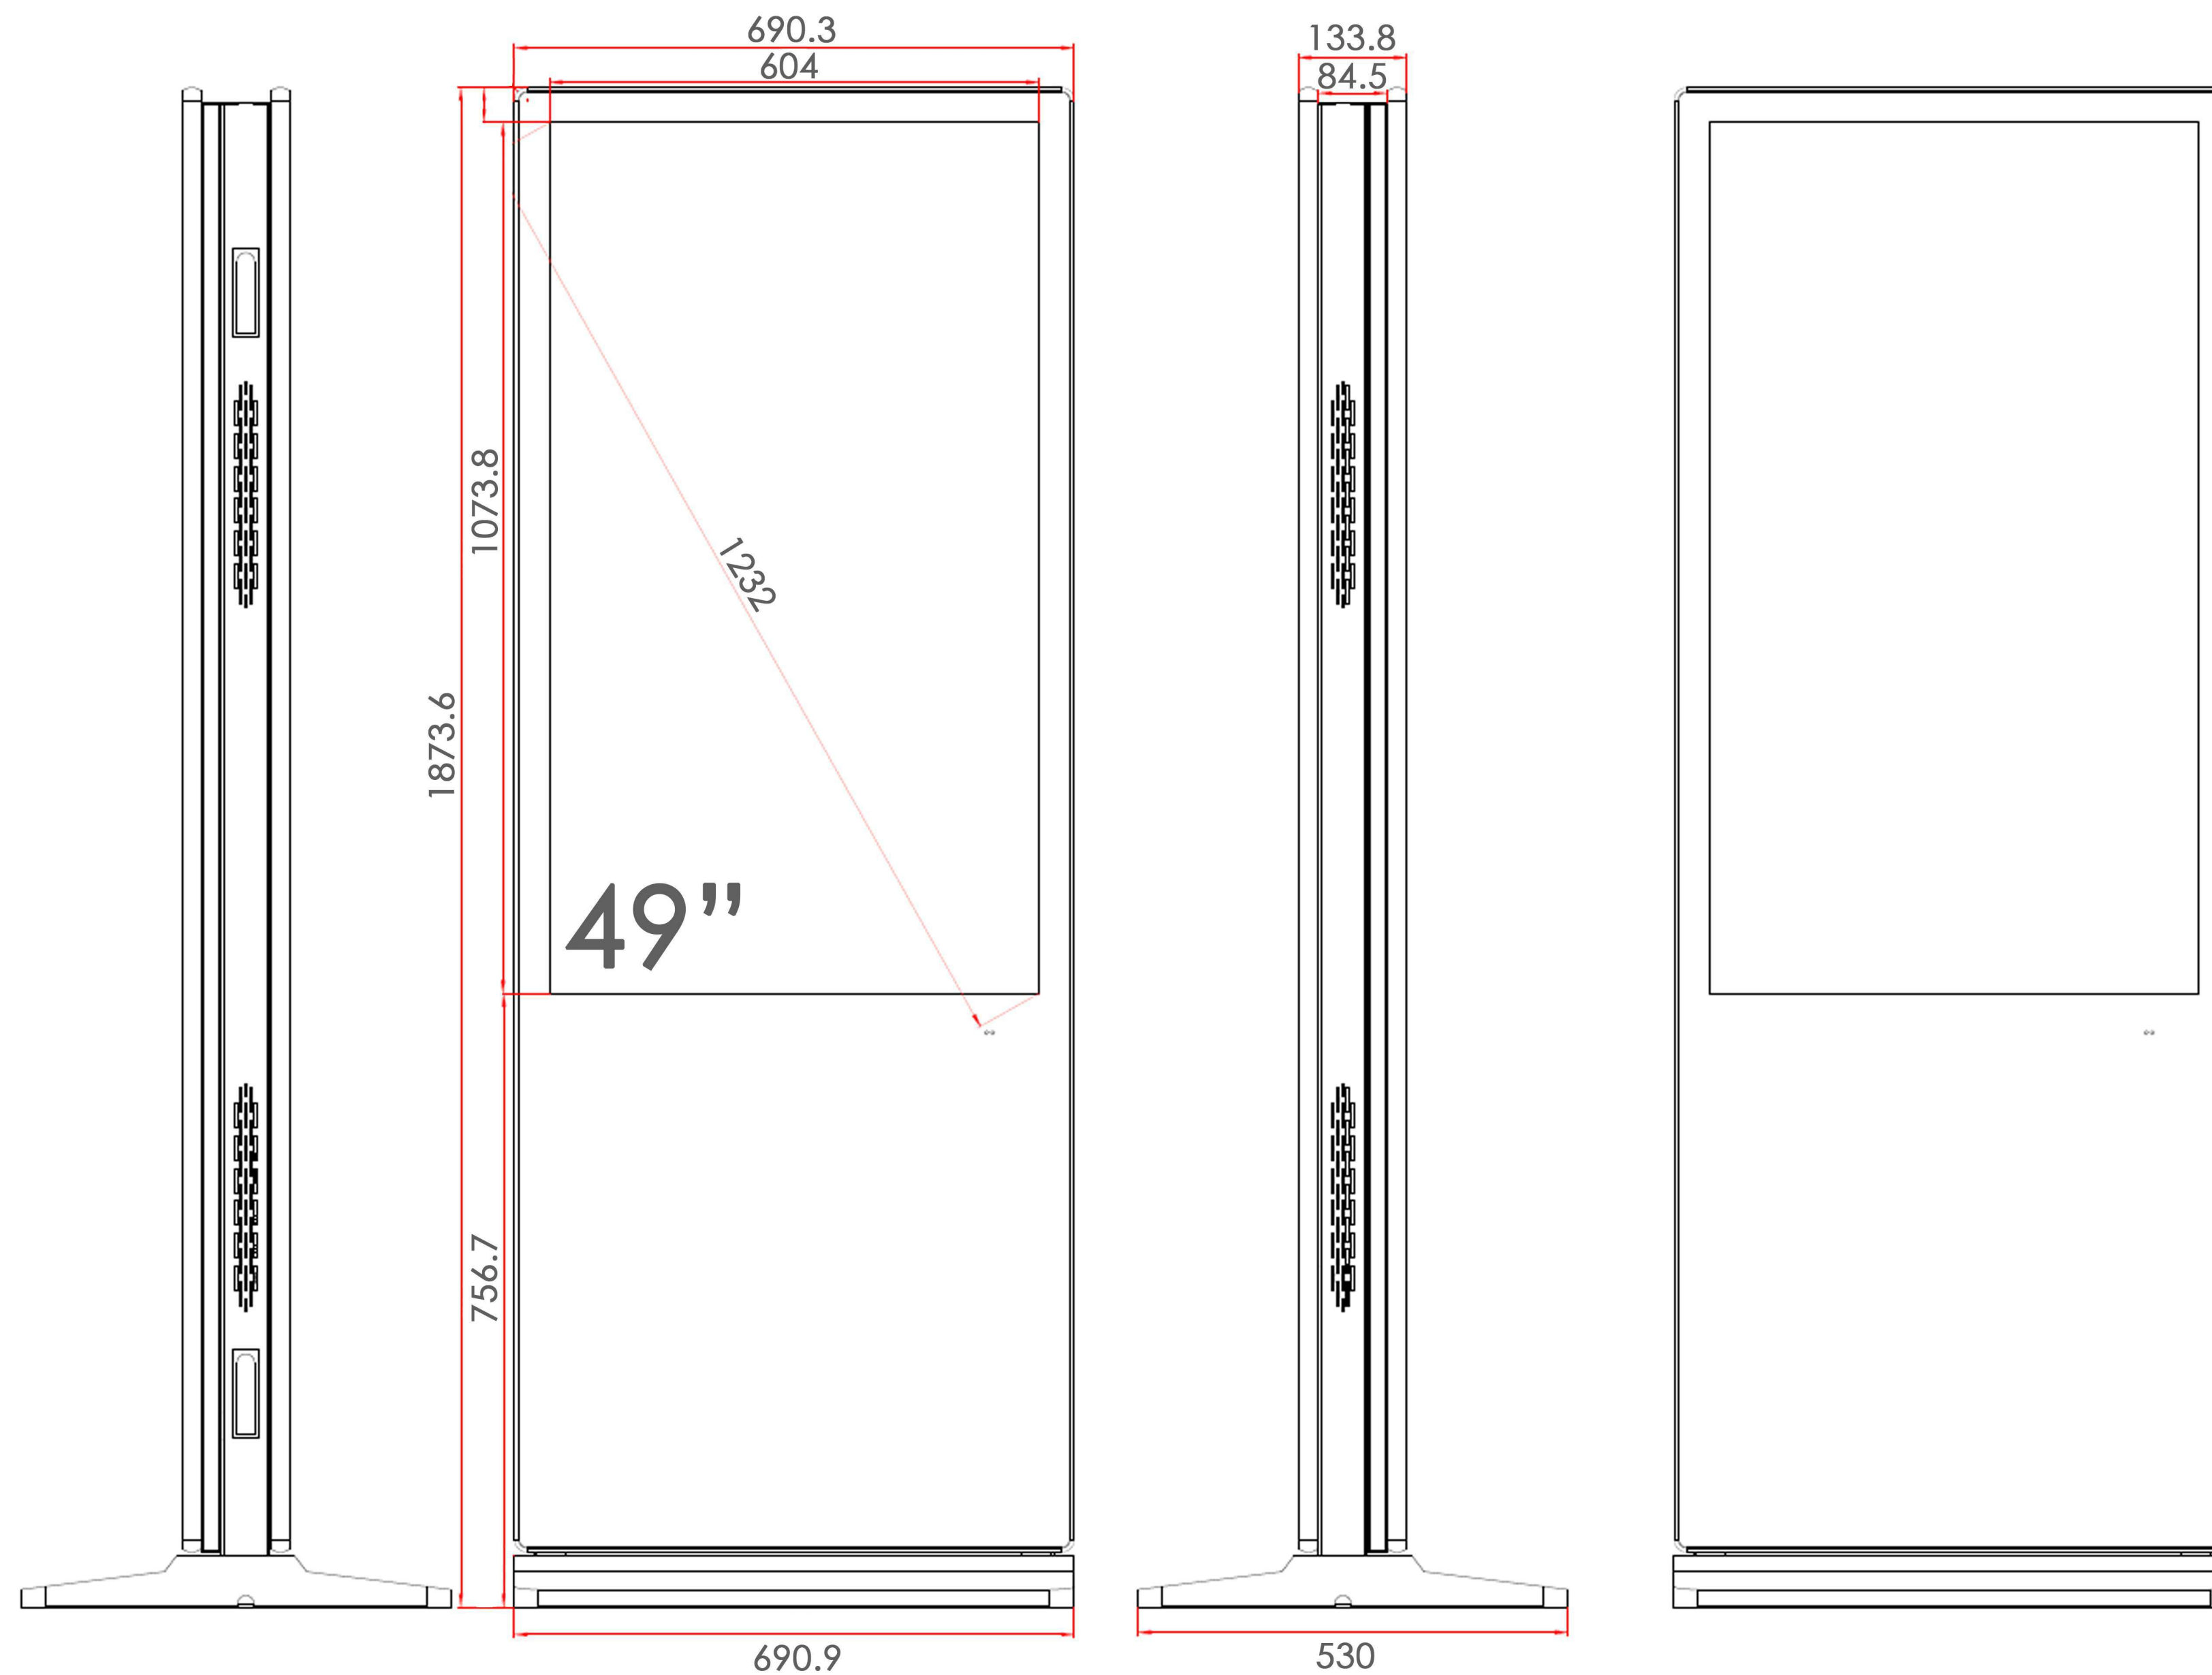


Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

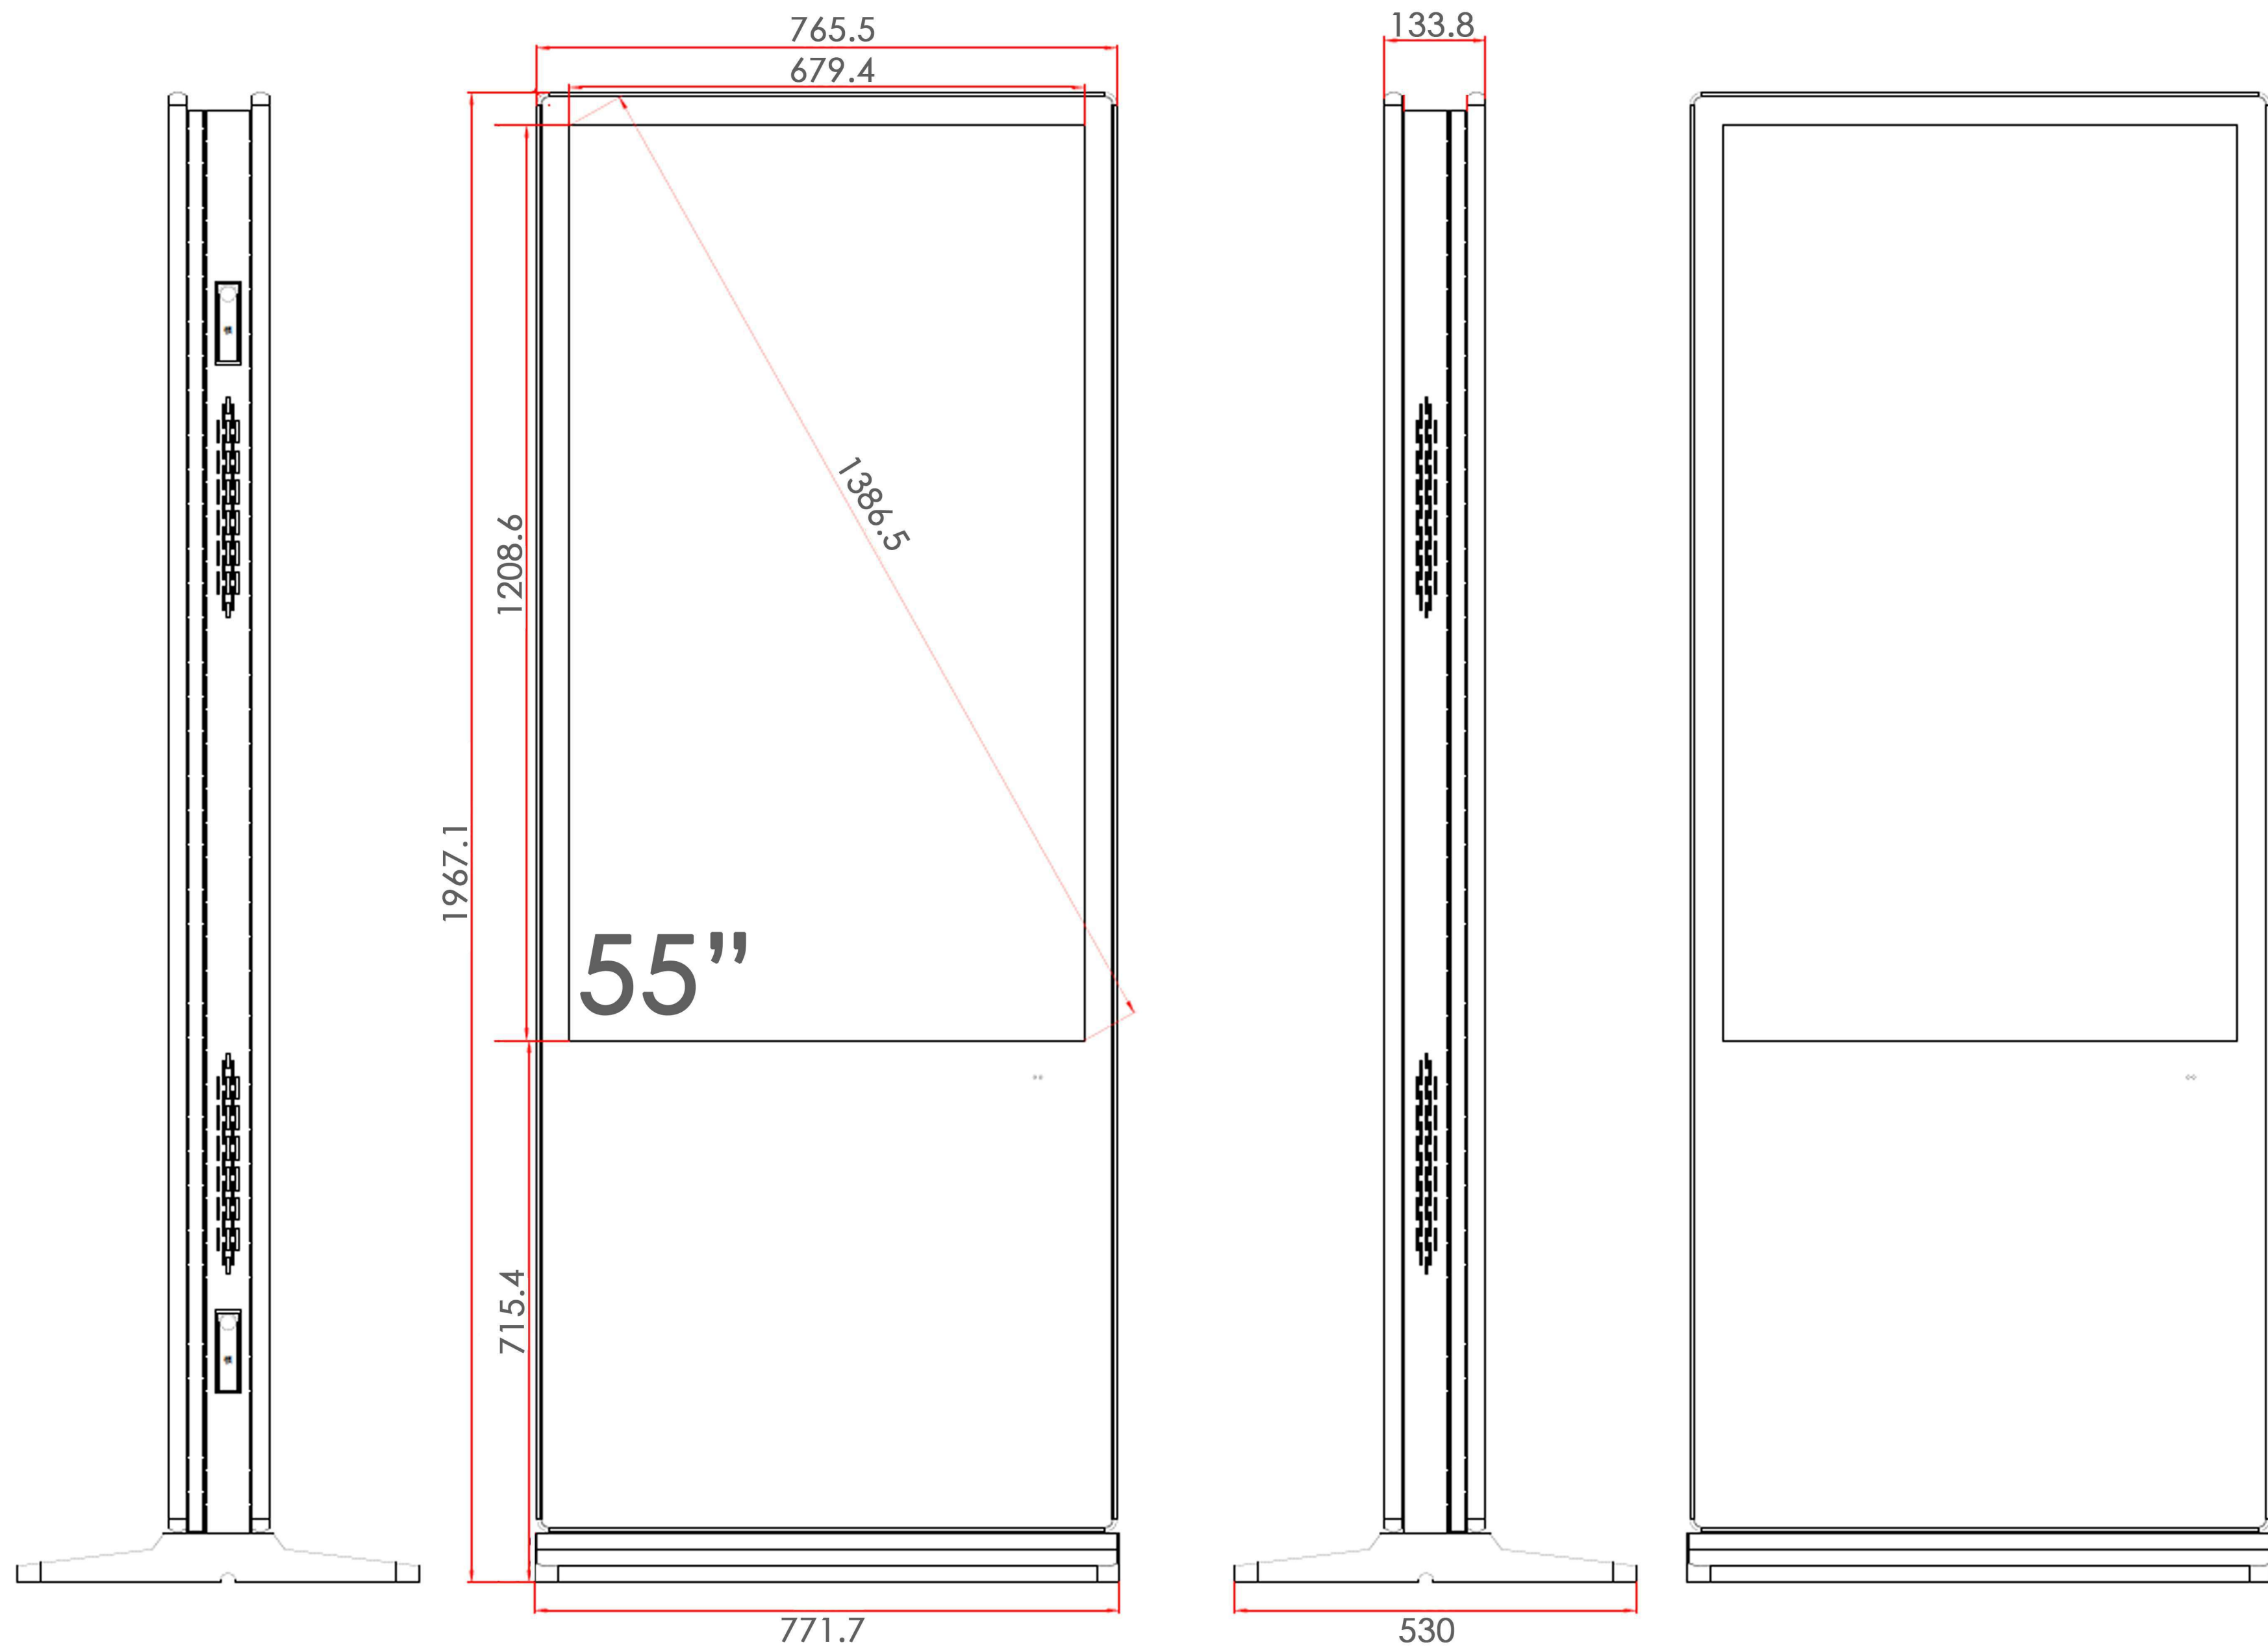


Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

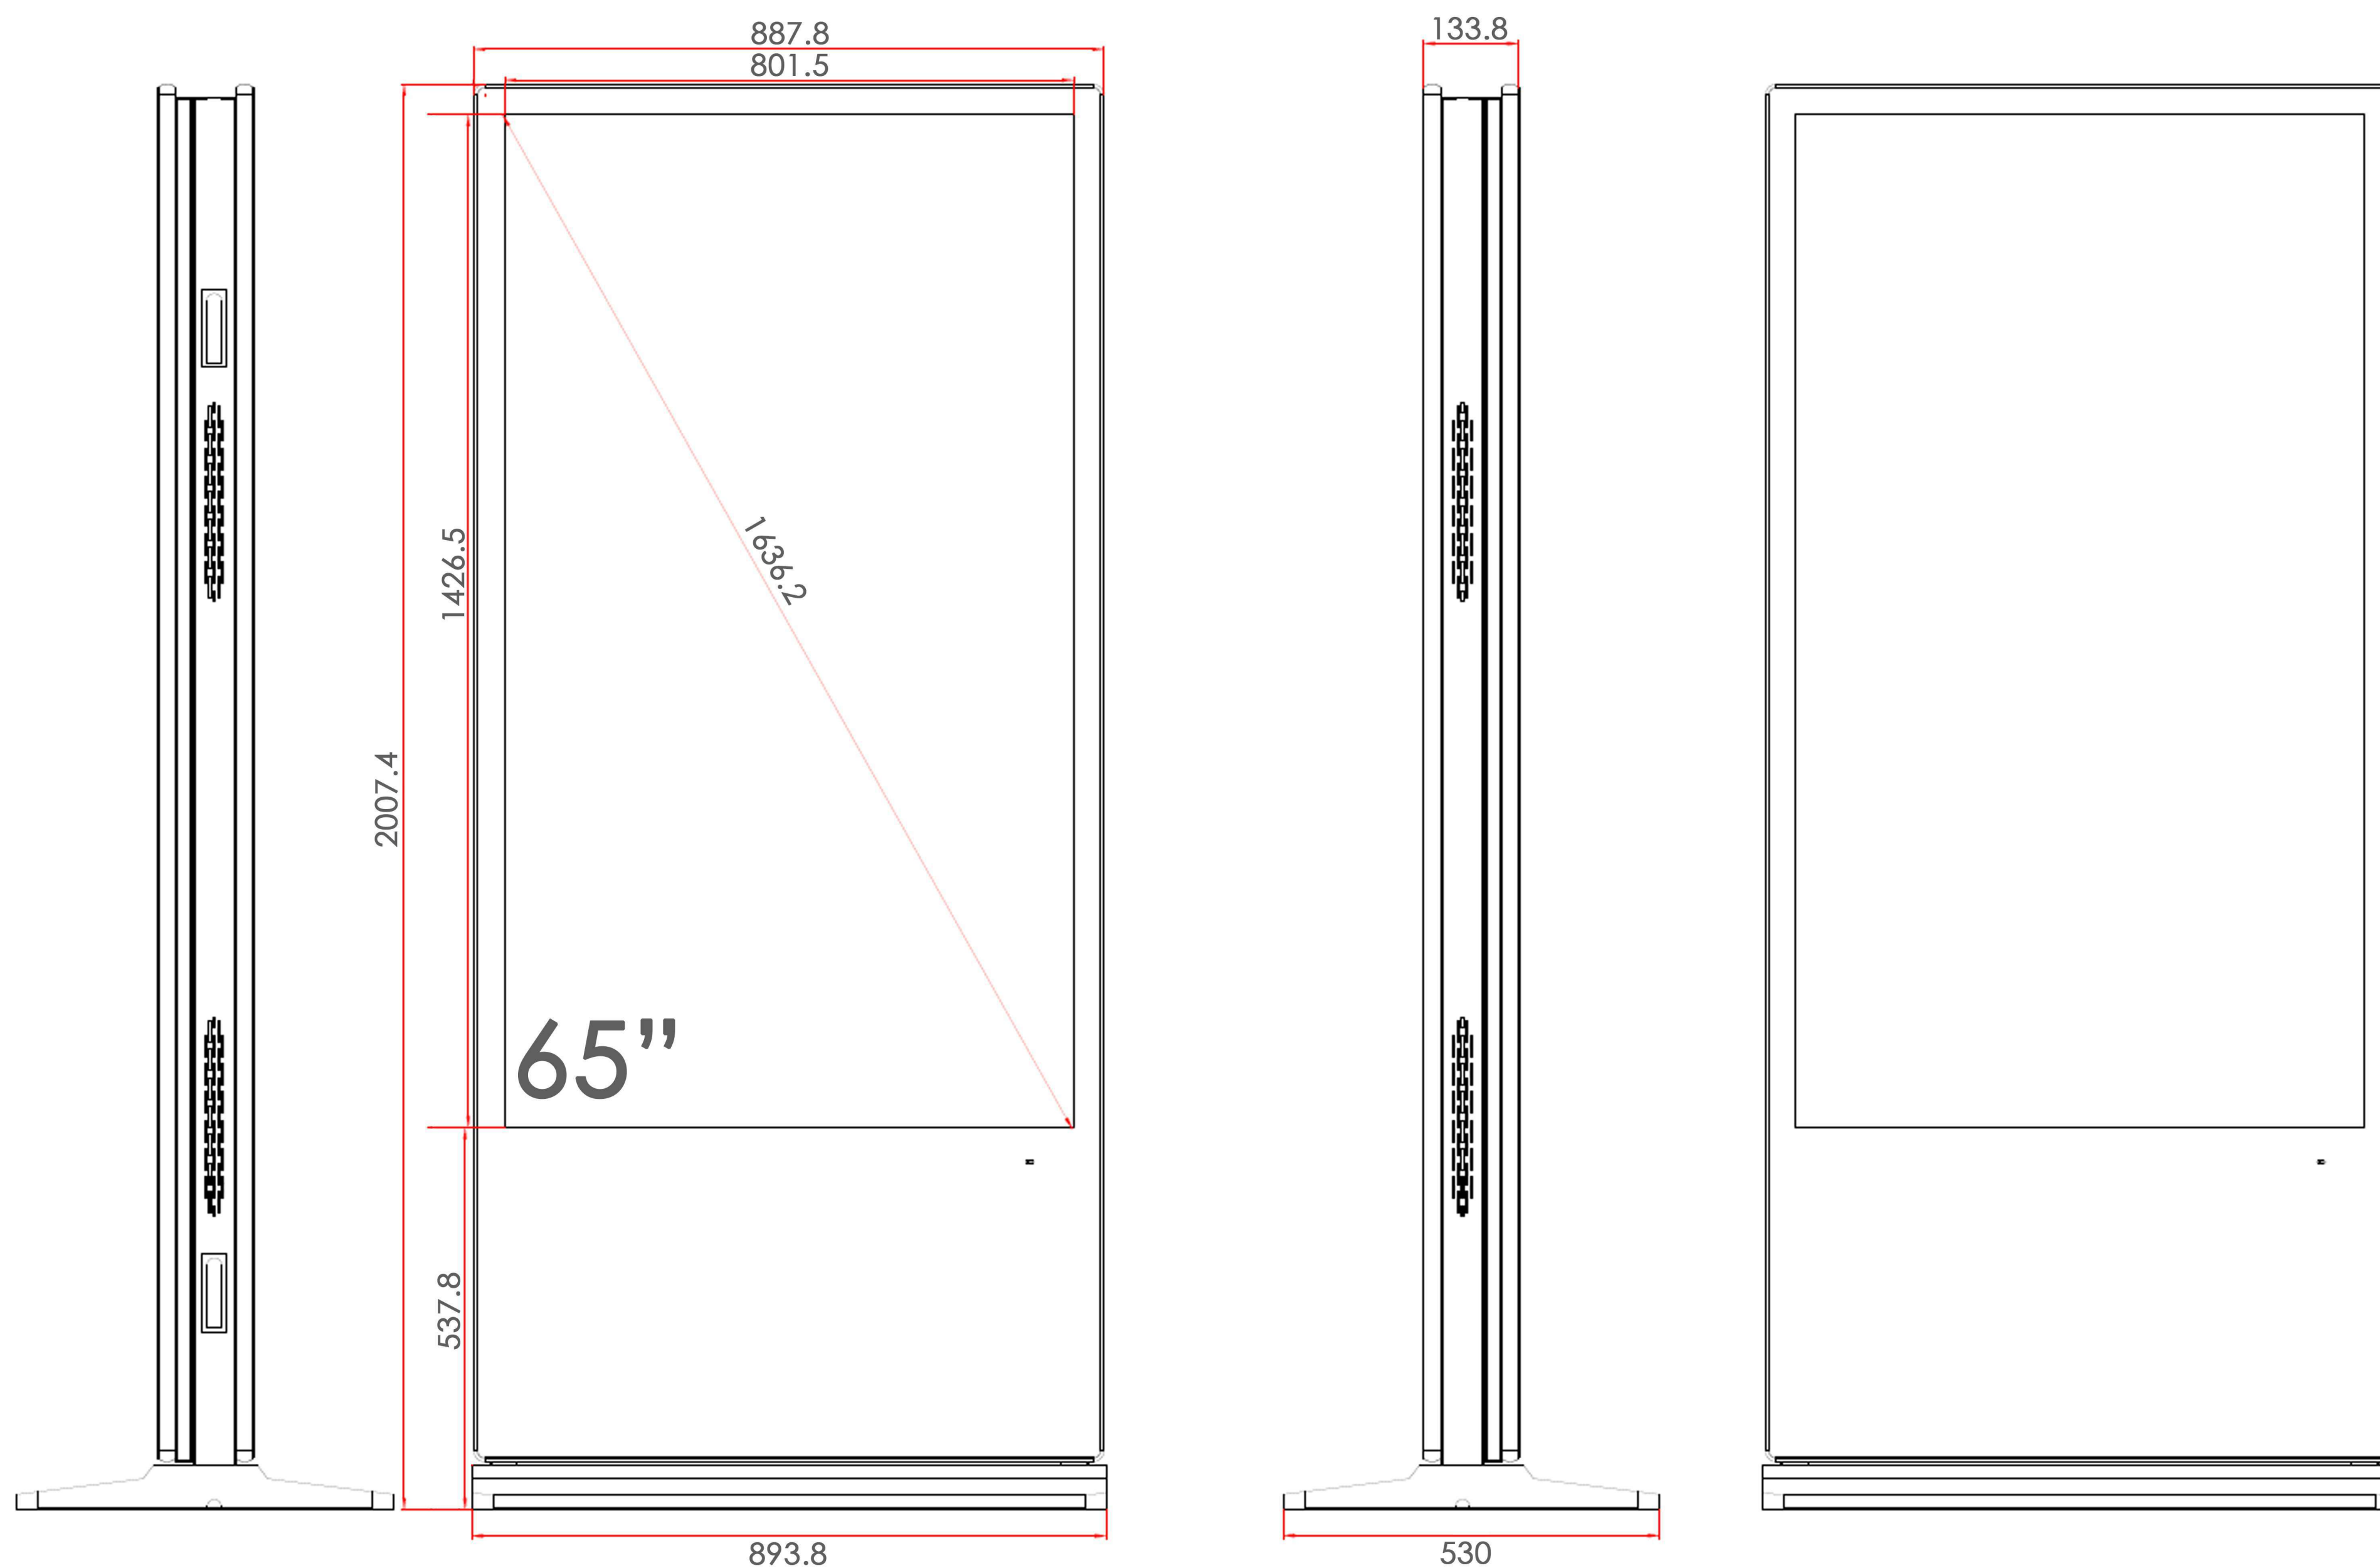

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794