

Promultis Totem Engage

The Promultis Totem Engage is a 55", PCAP Touch Totem with 10 Touch Points, as well as integrated Android 13 OS.



55" PCAP Touch Screen 

Android 13 OS 

HDMI, USB & More Connectivity 

4K Ultra High-Definition Display 

 >60,000 Hour Lifespan

 Excellent 3000:1 Contrast Ratio

 Optional i7 OPS PC

 Wide 178°/178° Viewing Angles

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

SPECIFICATIONS	
Panel size	55" TFT-LCD
Display area(mm)/mode	1209(W)x680(H) 16:9
Maximum resolution	3840x2160
Display color	16.7M
Pixel Pitch(mm)	0.43(H)x0.43(V)
Brightness (nits)	450cd/M ²
Contrast	3000:1
Visual angle	178°/178°
Response time	5ms
Life(hrs)	>60,000(hrs)
INPUT & OUTPUT	
HDMI	2
USB	2
RS232	1
RJ45	1
Touch output	1
Earphone	1
Speaker	2 X 5W (9 OHM)
VIDEO	
Color system	PAL/NTSC/SECAM

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤180W
Standby power consumption	<5W
TEMPERATURE	
Working temperature	0 ° C ~ 50 ° C
Storage temperature	-20 ° C ~ 60 ° C
Working humidity	85%
Storage humidity	85%
ANDRIOD SPECIFICATIONS	
Andriod system	Google Android 13 support multi-language
Storage	4G DDR3
CPU	Dual core 1.8 Ghz/quad-core 982
Flash	32G
APPEARANCE	
Color/appearance	White,black,customized
Case	Metal case SPCC
Installation	Floor standing
Quality Standard	CE,CCC
TOUCH PANEL	
Specification	Capacitive touch

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

Positioning accuracy	±2mms
Transmittance	≥92%
Hardness	7H
Click manner	10 points touch
Response time	≤10ms
Life time	More than 600 million times
DETAILED FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P/2160P


Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

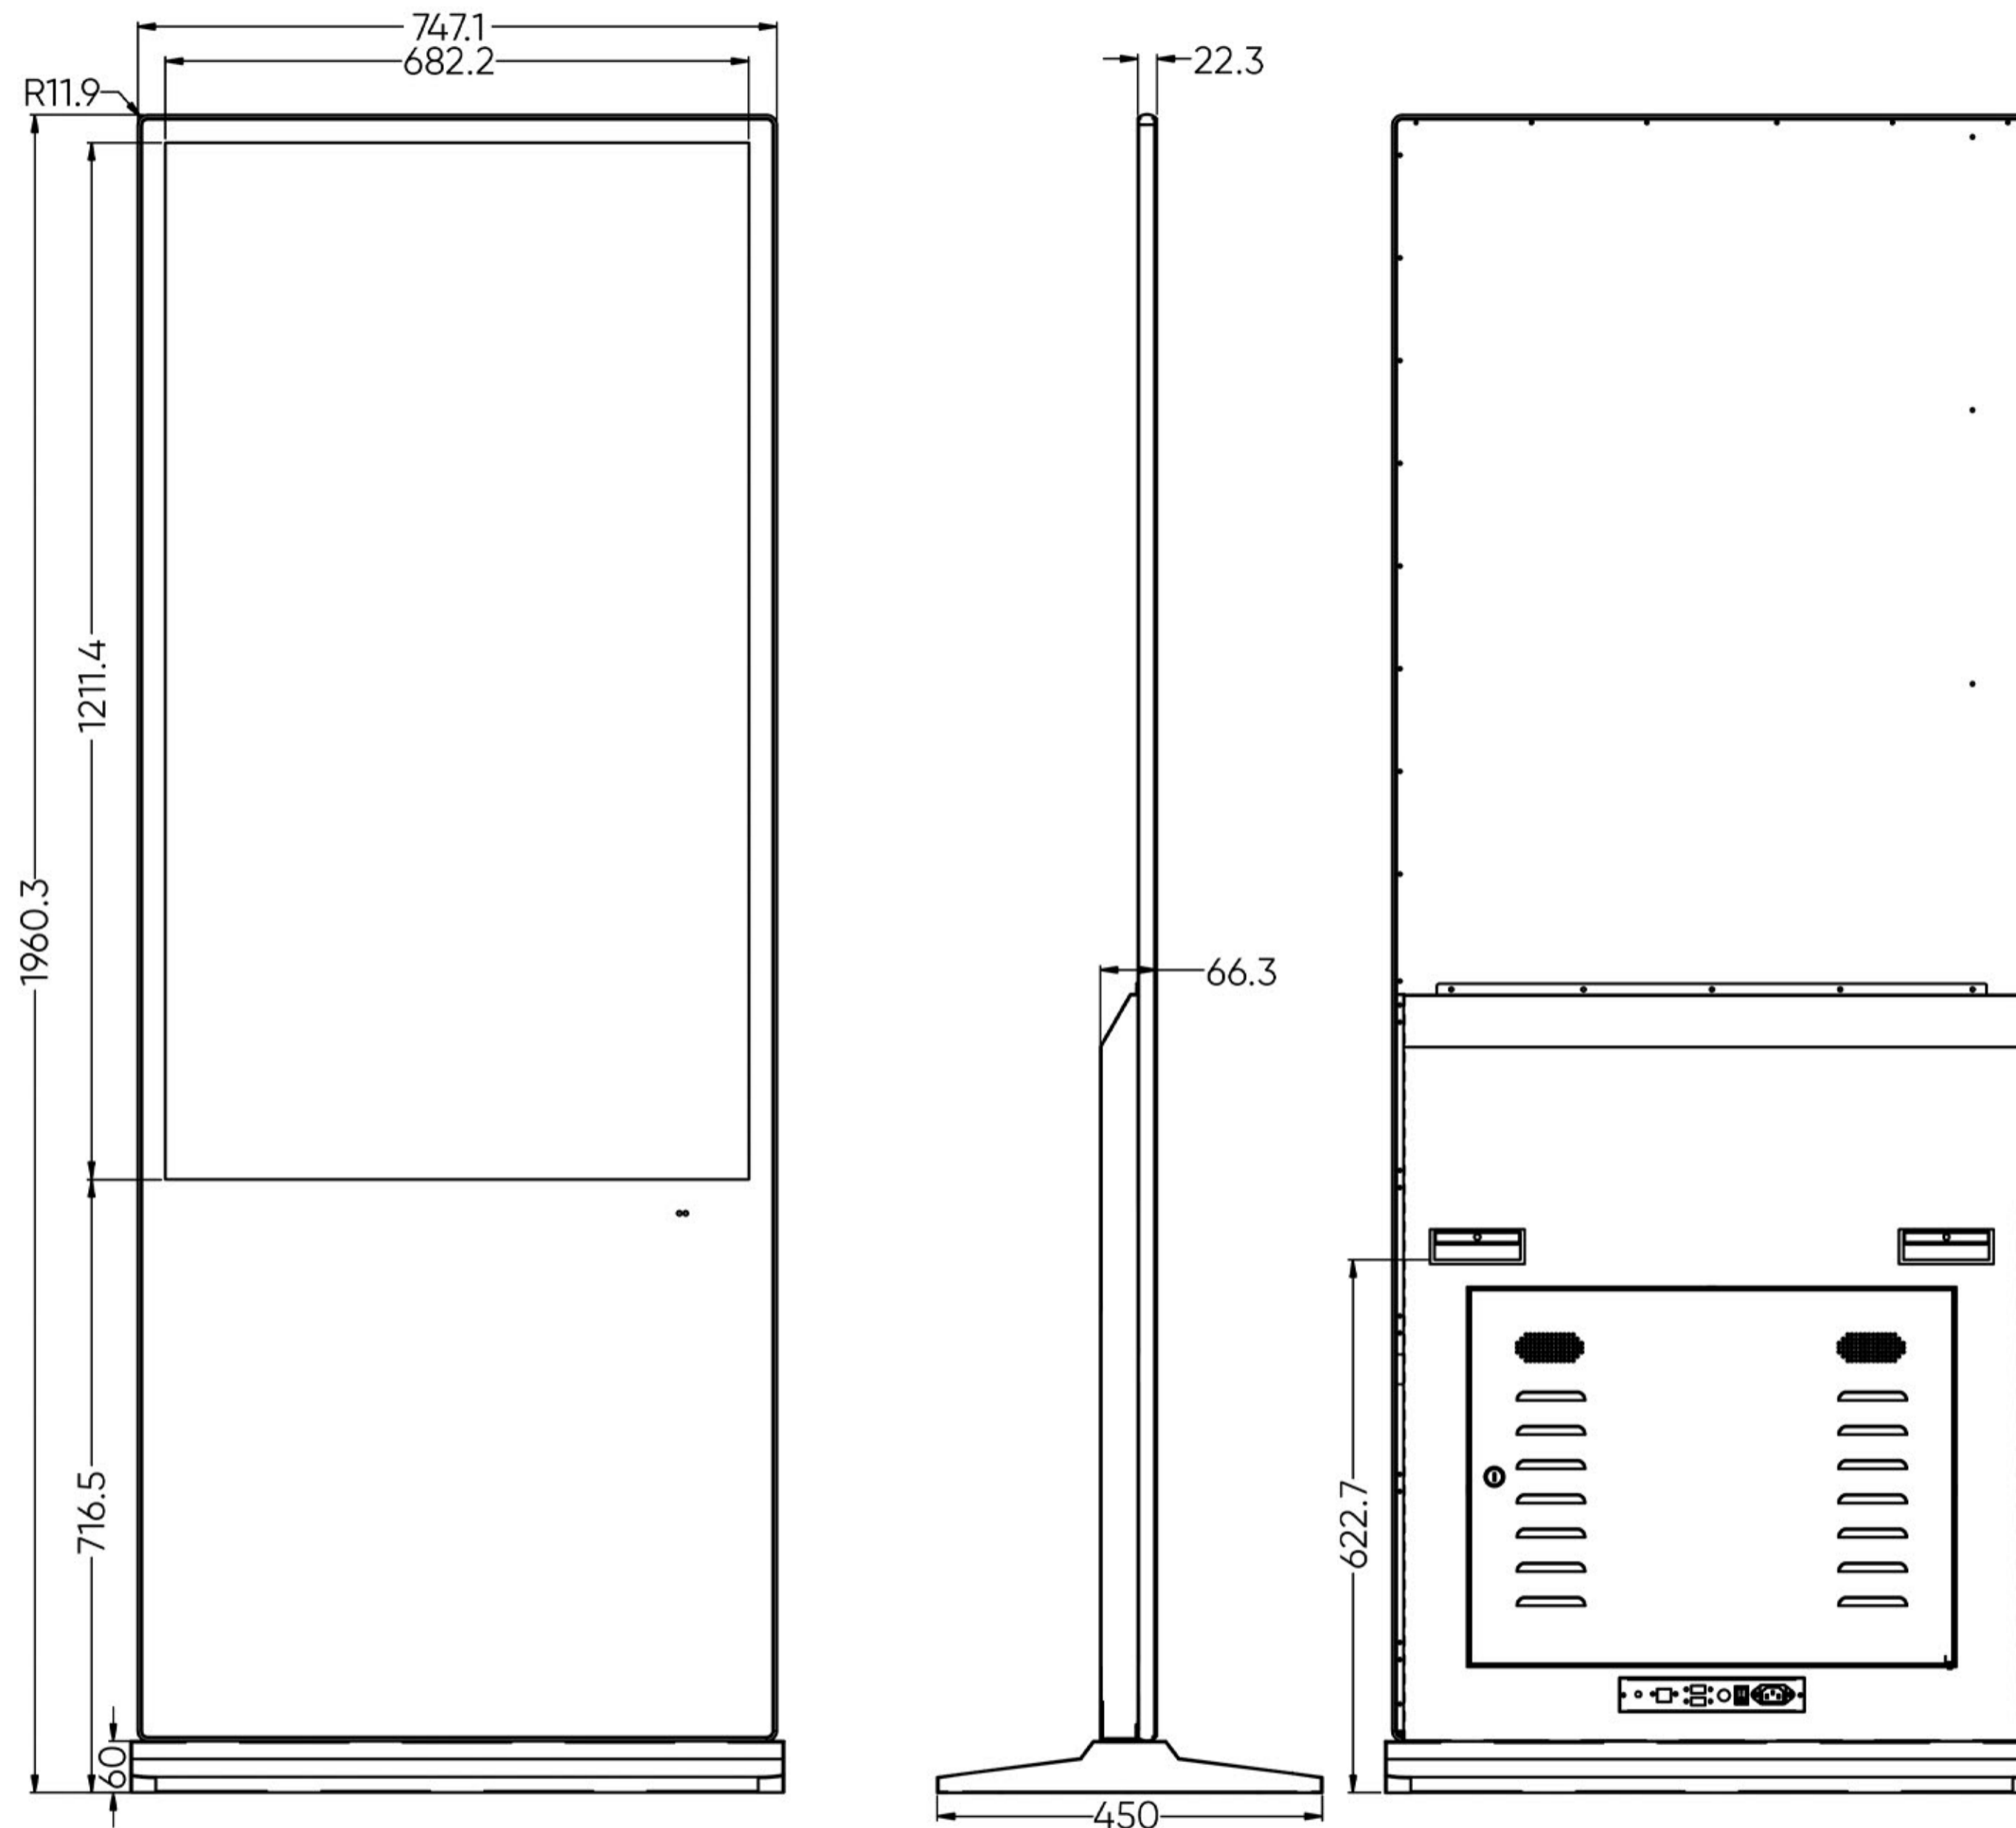

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794