

Promultis Ventus Outdoor

The Promultis Ventus is a outdoor, IP65 Rated, Up to 3000 Nits High Brightness Touchscreen Totem. With 10 PCAP Touch Points and Energy saving cooling fans.


IP65 Rating



Energy Saving Fan Technology



Up to 3000 Nits



10 PCAP Touch Points



HDMI & USB Connectivity



Ultra-Wide 178° Viewing Angle



32", 43", 55", 65" & 75" Available



Up to 4K UHD Resolution

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

	32"	43"	55"
Panel size	32" TFT-LCD	43" TFT-LCD	55" TFT-LCD
Display area(mm)/mode	698.8(H)*393.3(V)mm 16:9	941.2(H)*529.4 (V)mm 16:9	1209.6(H)*680.4(V)mm 16:9
Maximum resolution	1920*1080		3840*2160
Display color	16.7M		
Pixel Pitch(mm)	0.49mm(H) x 0.49mm(V) (mm)		0.63mm(H) x 0.63mm(V) (mm)
Brightness (nits)	3000cd/m²		
Backlight adjustment	Automatic light sensor		
Contrast	2000:1		3000:1
Visual angle	178°/178°		
Response time	5ms		
Grade	Commercial grade 24/7		
Life(hrs)	>60,000(hrs)		
INPUT AND OUTPUT			
HDMI	1		
USB	1		
Audio	1		
Speaker	2×10W (8 ohm)		
VIDEO			
Color system	PAL/NTSC/SECAM		
POWER			
Power supply	AC100~240V 50 /60 HZ		
Maximum power consumption	≤160W		≤240W
Standby power consumption	<5W		
TEMPERATURES			
Working temperature	-20℃ ~ 55℃		
Storage temperature	-20℃ ~ 60℃		
Working humidity	85%		
Storage humidity	85%		
Waterproof grade	IP66		
Temperature control	Aluminum cooling		
DETAILED FUNCTIONS			
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI		
Audio format	Wave/MP3/WMA/AAC		
Image format	JPEG/BMP/TIFF/PNG/GIF		
Image resolution	480P/720P/1080P		480P/720P/1080P/2160P
Split screen display	Editable		
TOUCH PANEL			
Specification	Pcap touch		
Positioning accuracy	±1mms		
Transmittance	≥93%		
Hardness	7H		

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

	32"	43"	55"
Touch points	10 touch points		
Response time	≤5ms		
Life span	More than 600 million times		
APPEARANCE			
Enclosure colour/appearance	White, black, customized		
Enclosure material	Metal case SPCC, Aluminum		
Glass	AG tempered glass		

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

	65"	75"
Panel size	65" TFT-LCD	75" TFT-LCD
Display area(mm)/mode	1428.5mm(H) x 803.5mm(V) 16:9	1649(H)*927(V)mm 16:9
Maximum resolution	3840*2160	
Display color	16.7M	
Pixel Pitch(mm)	0.63mm(H) x 0.63mm(V) (mm)	
Brightness (nits)	3000cd/m²	
Backlight adjustment	Automatic light sensor	
Contrast	3000:1	
Visual angle	178°/178°	
Response time	5ms	
Grade	Commercial grade 24/7	
Life(hrs)	>60,000(hrs)	
INPUT AND OUTPUT		
HDMI	1	
USB	1	
Audio	1	
Speaker	2×10W (8 ohm)	
VIDEO		
Color system	PAL/NTSC/SECAM	
POWER		
Power supply	AC100~240V 50 /60 HZ	
Maximum power consumption	≤320W	≤390W
Standby power consumption	<5W	
TEMPERATURE		
Working temperature	-20℃ ~ 55℃	
Storage temperature	-20℃ ~ 60℃	
Working humidity	85%	
Storage humidity	85%	
Waterproof grade	IP66	
Temperature control	Aluminum cooling	
DETAILED FUNCTIONS		
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI	
Audio format	Wave/MP3/WMA/AAC	
Image format	JPEG/BMP/TIFF/PNG/GIF	
Image resolution	480P/720P/1080P/2160P	
Split screen display	Editable	
TOUCH PANEL		
Specification	Pcap touch	
Positioning accuracy	±1mm	
Transmittance	≥93%	
Hardness	7H	

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

	65"	75"
Touch points	10	
Response time	≤5ms	
Life span	More than 600 million times	
APPEARANCE		
Enclosure color/appearance	White, black, customized	
Enclosure material	Metal case SPCC, Aluminum	
Glass	AG tempered glass	


Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

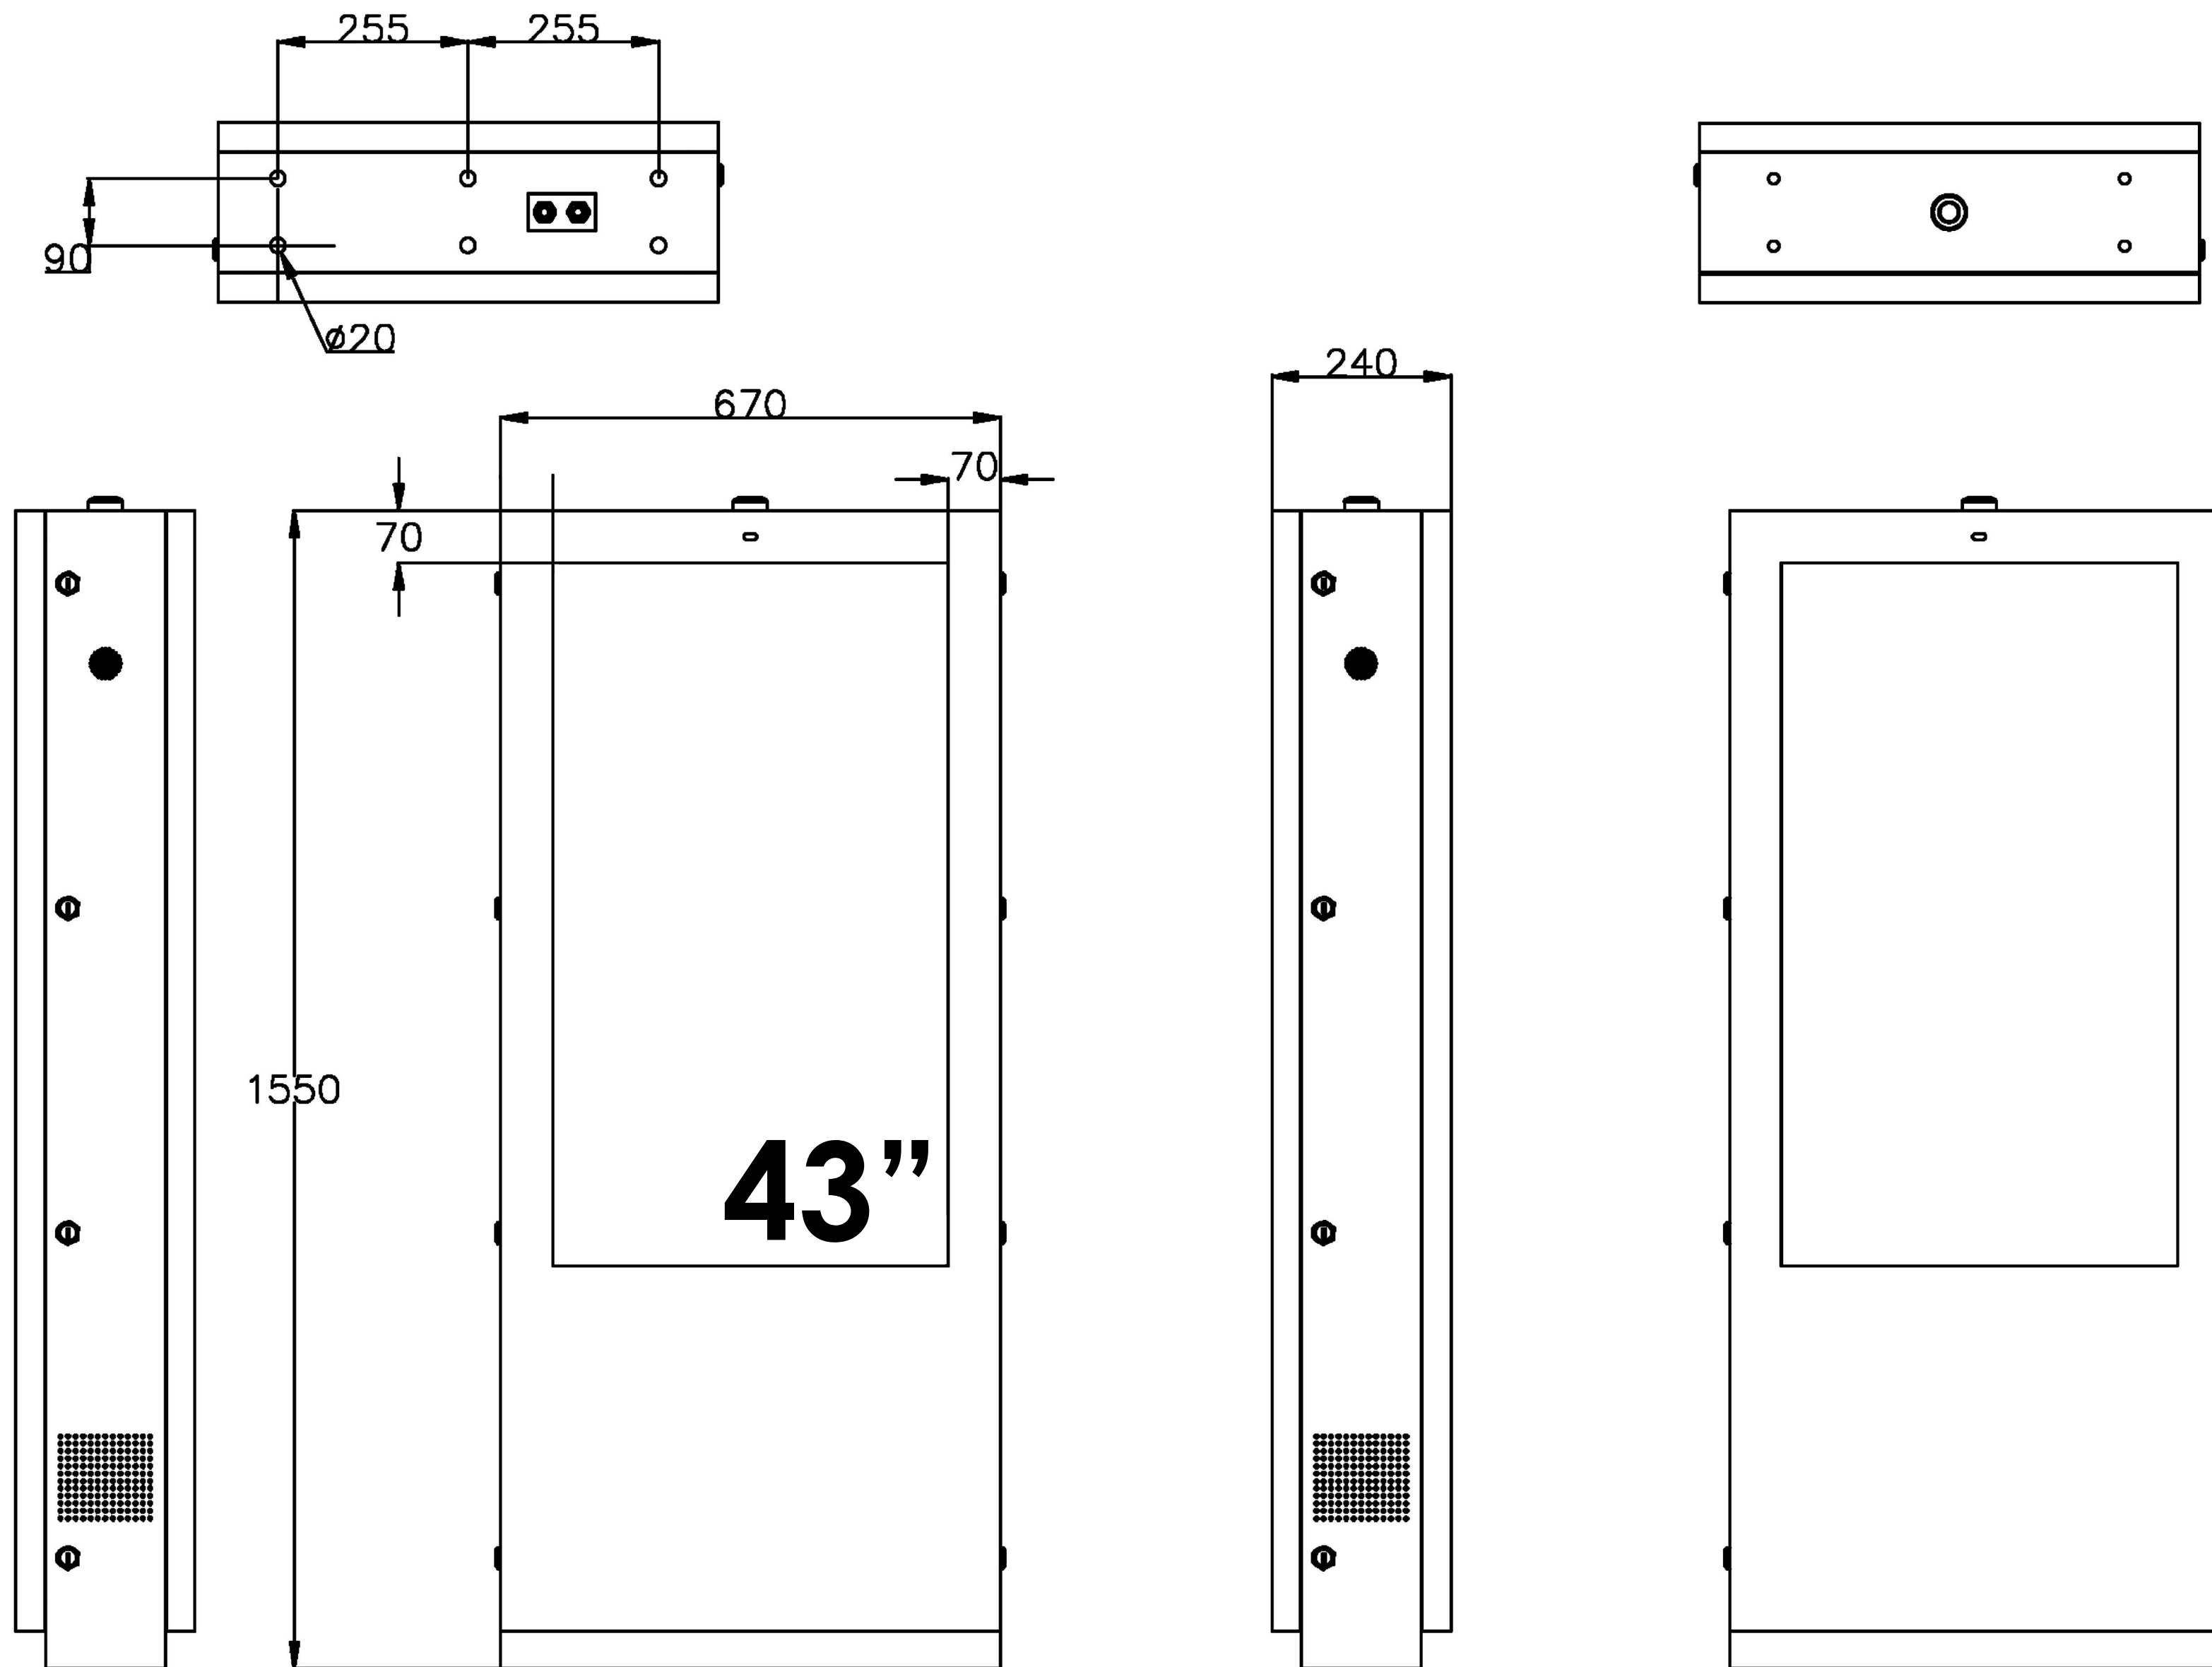


Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

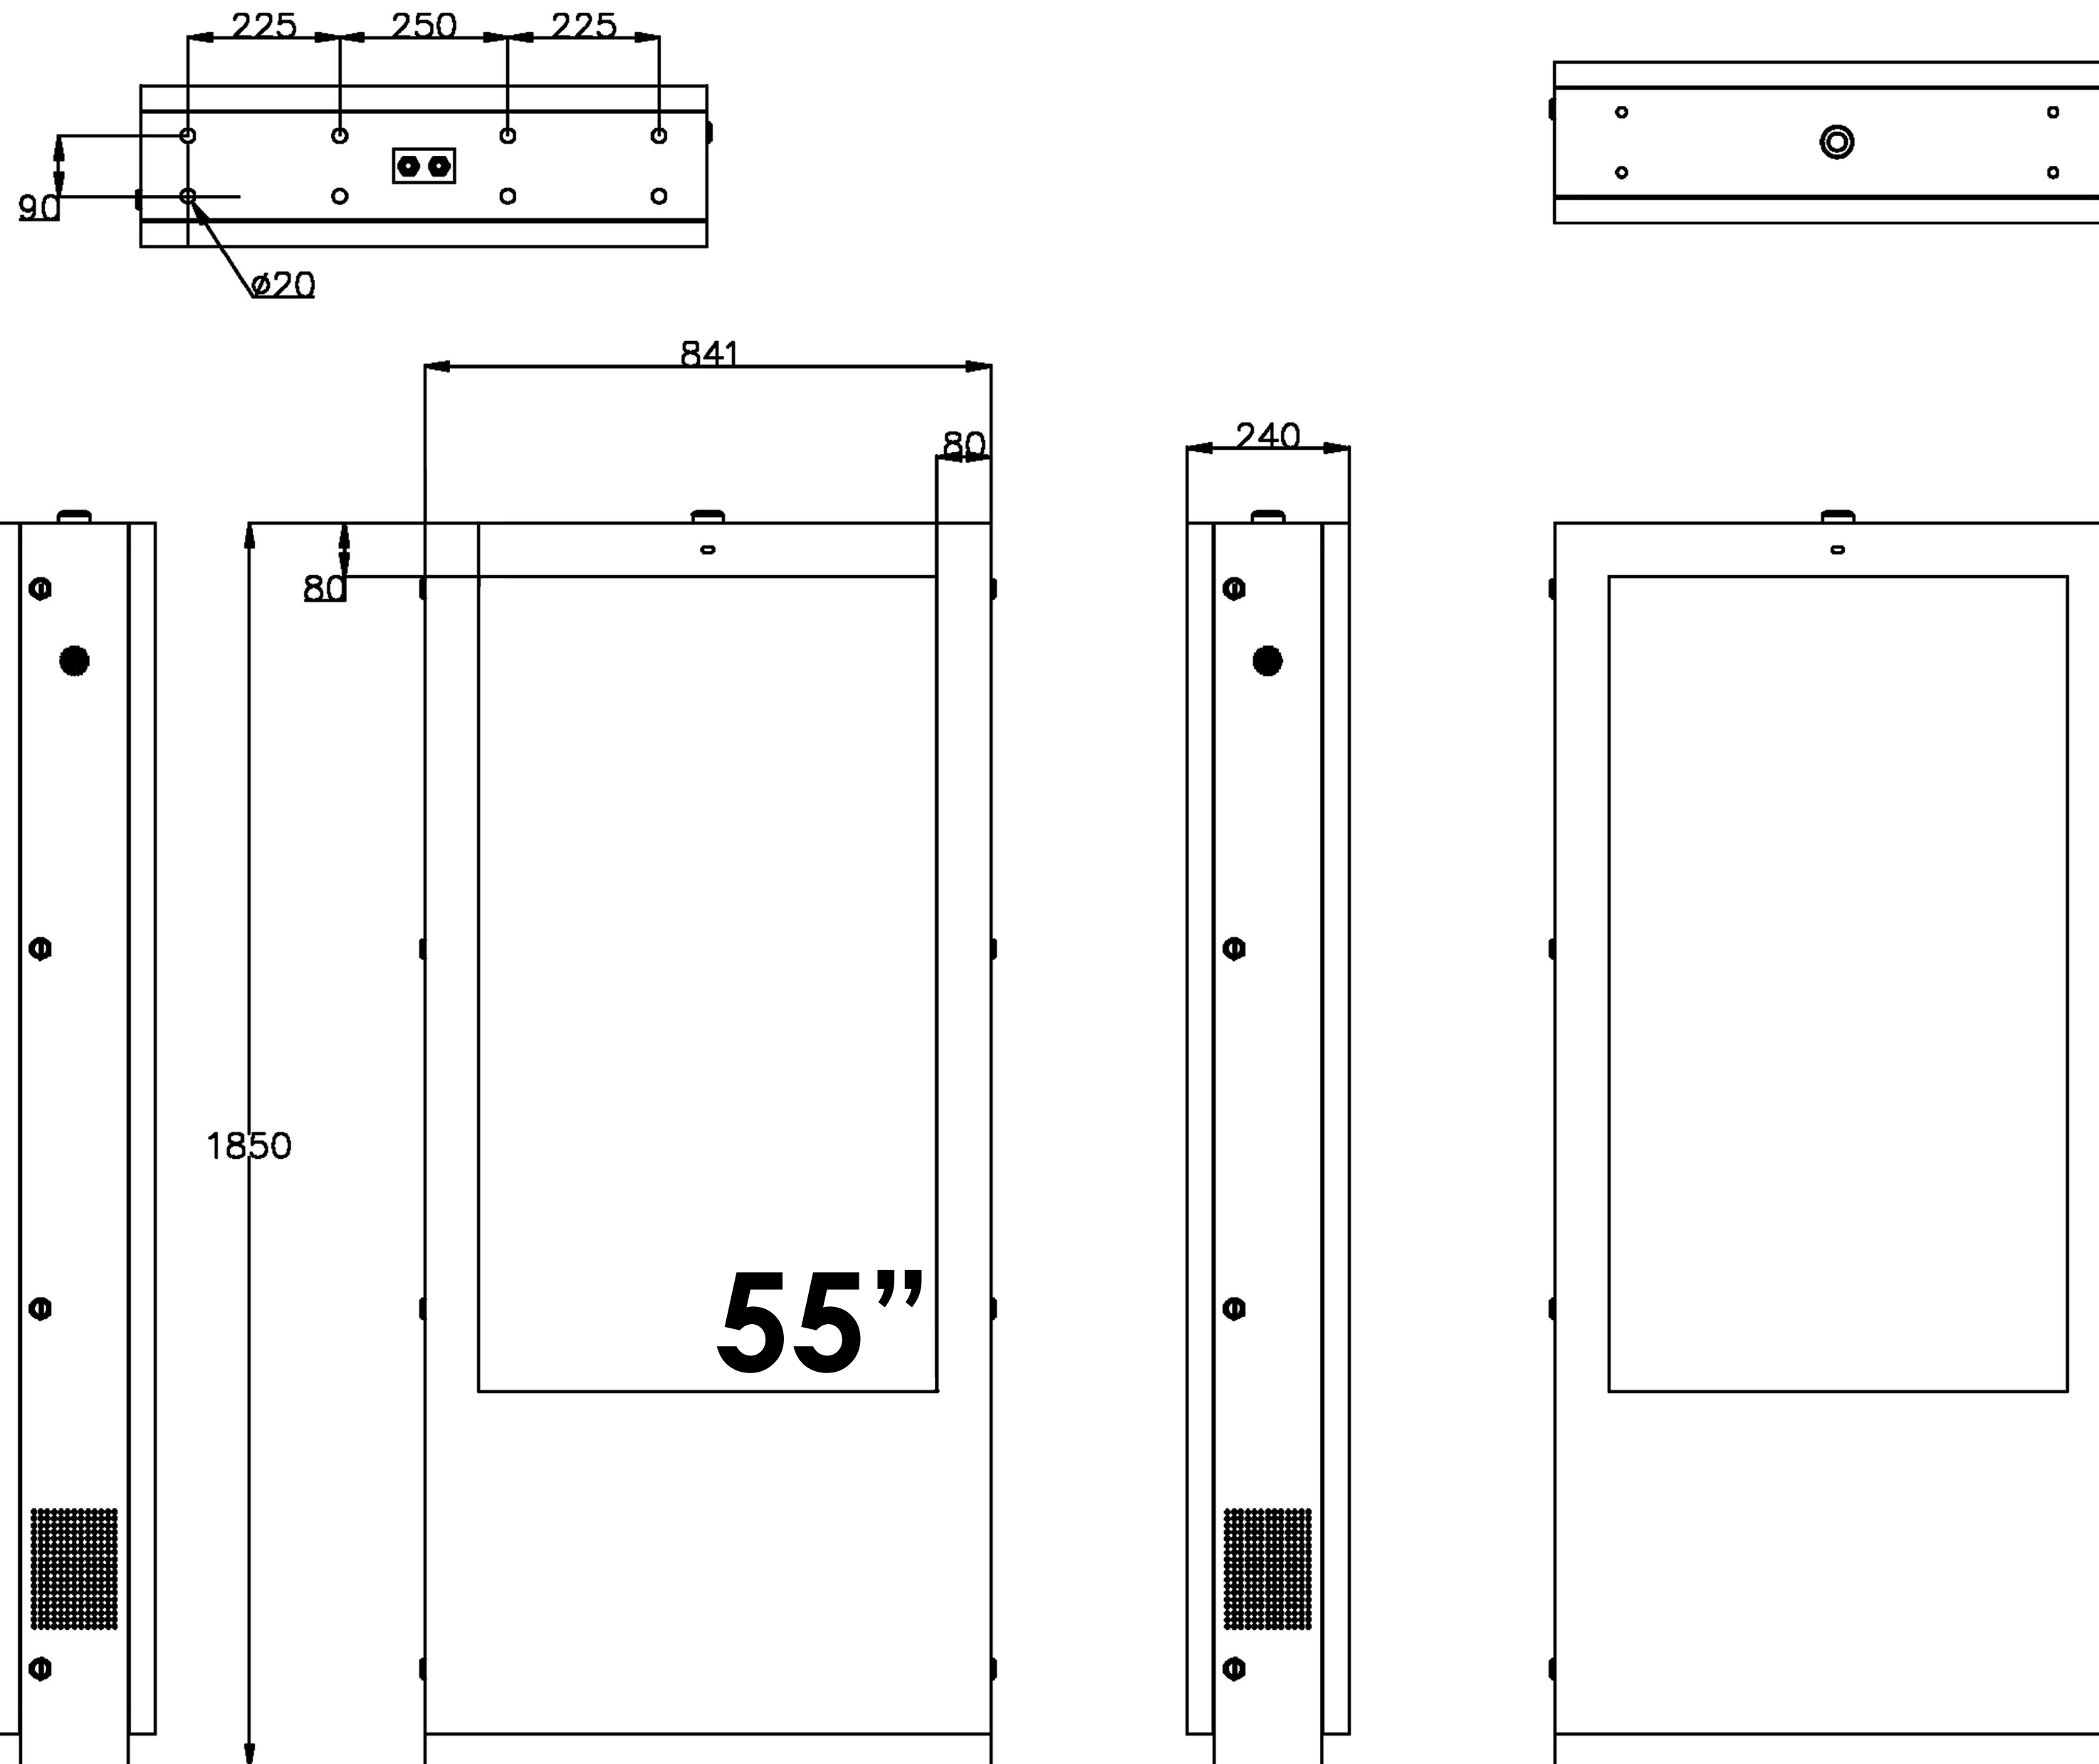


Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

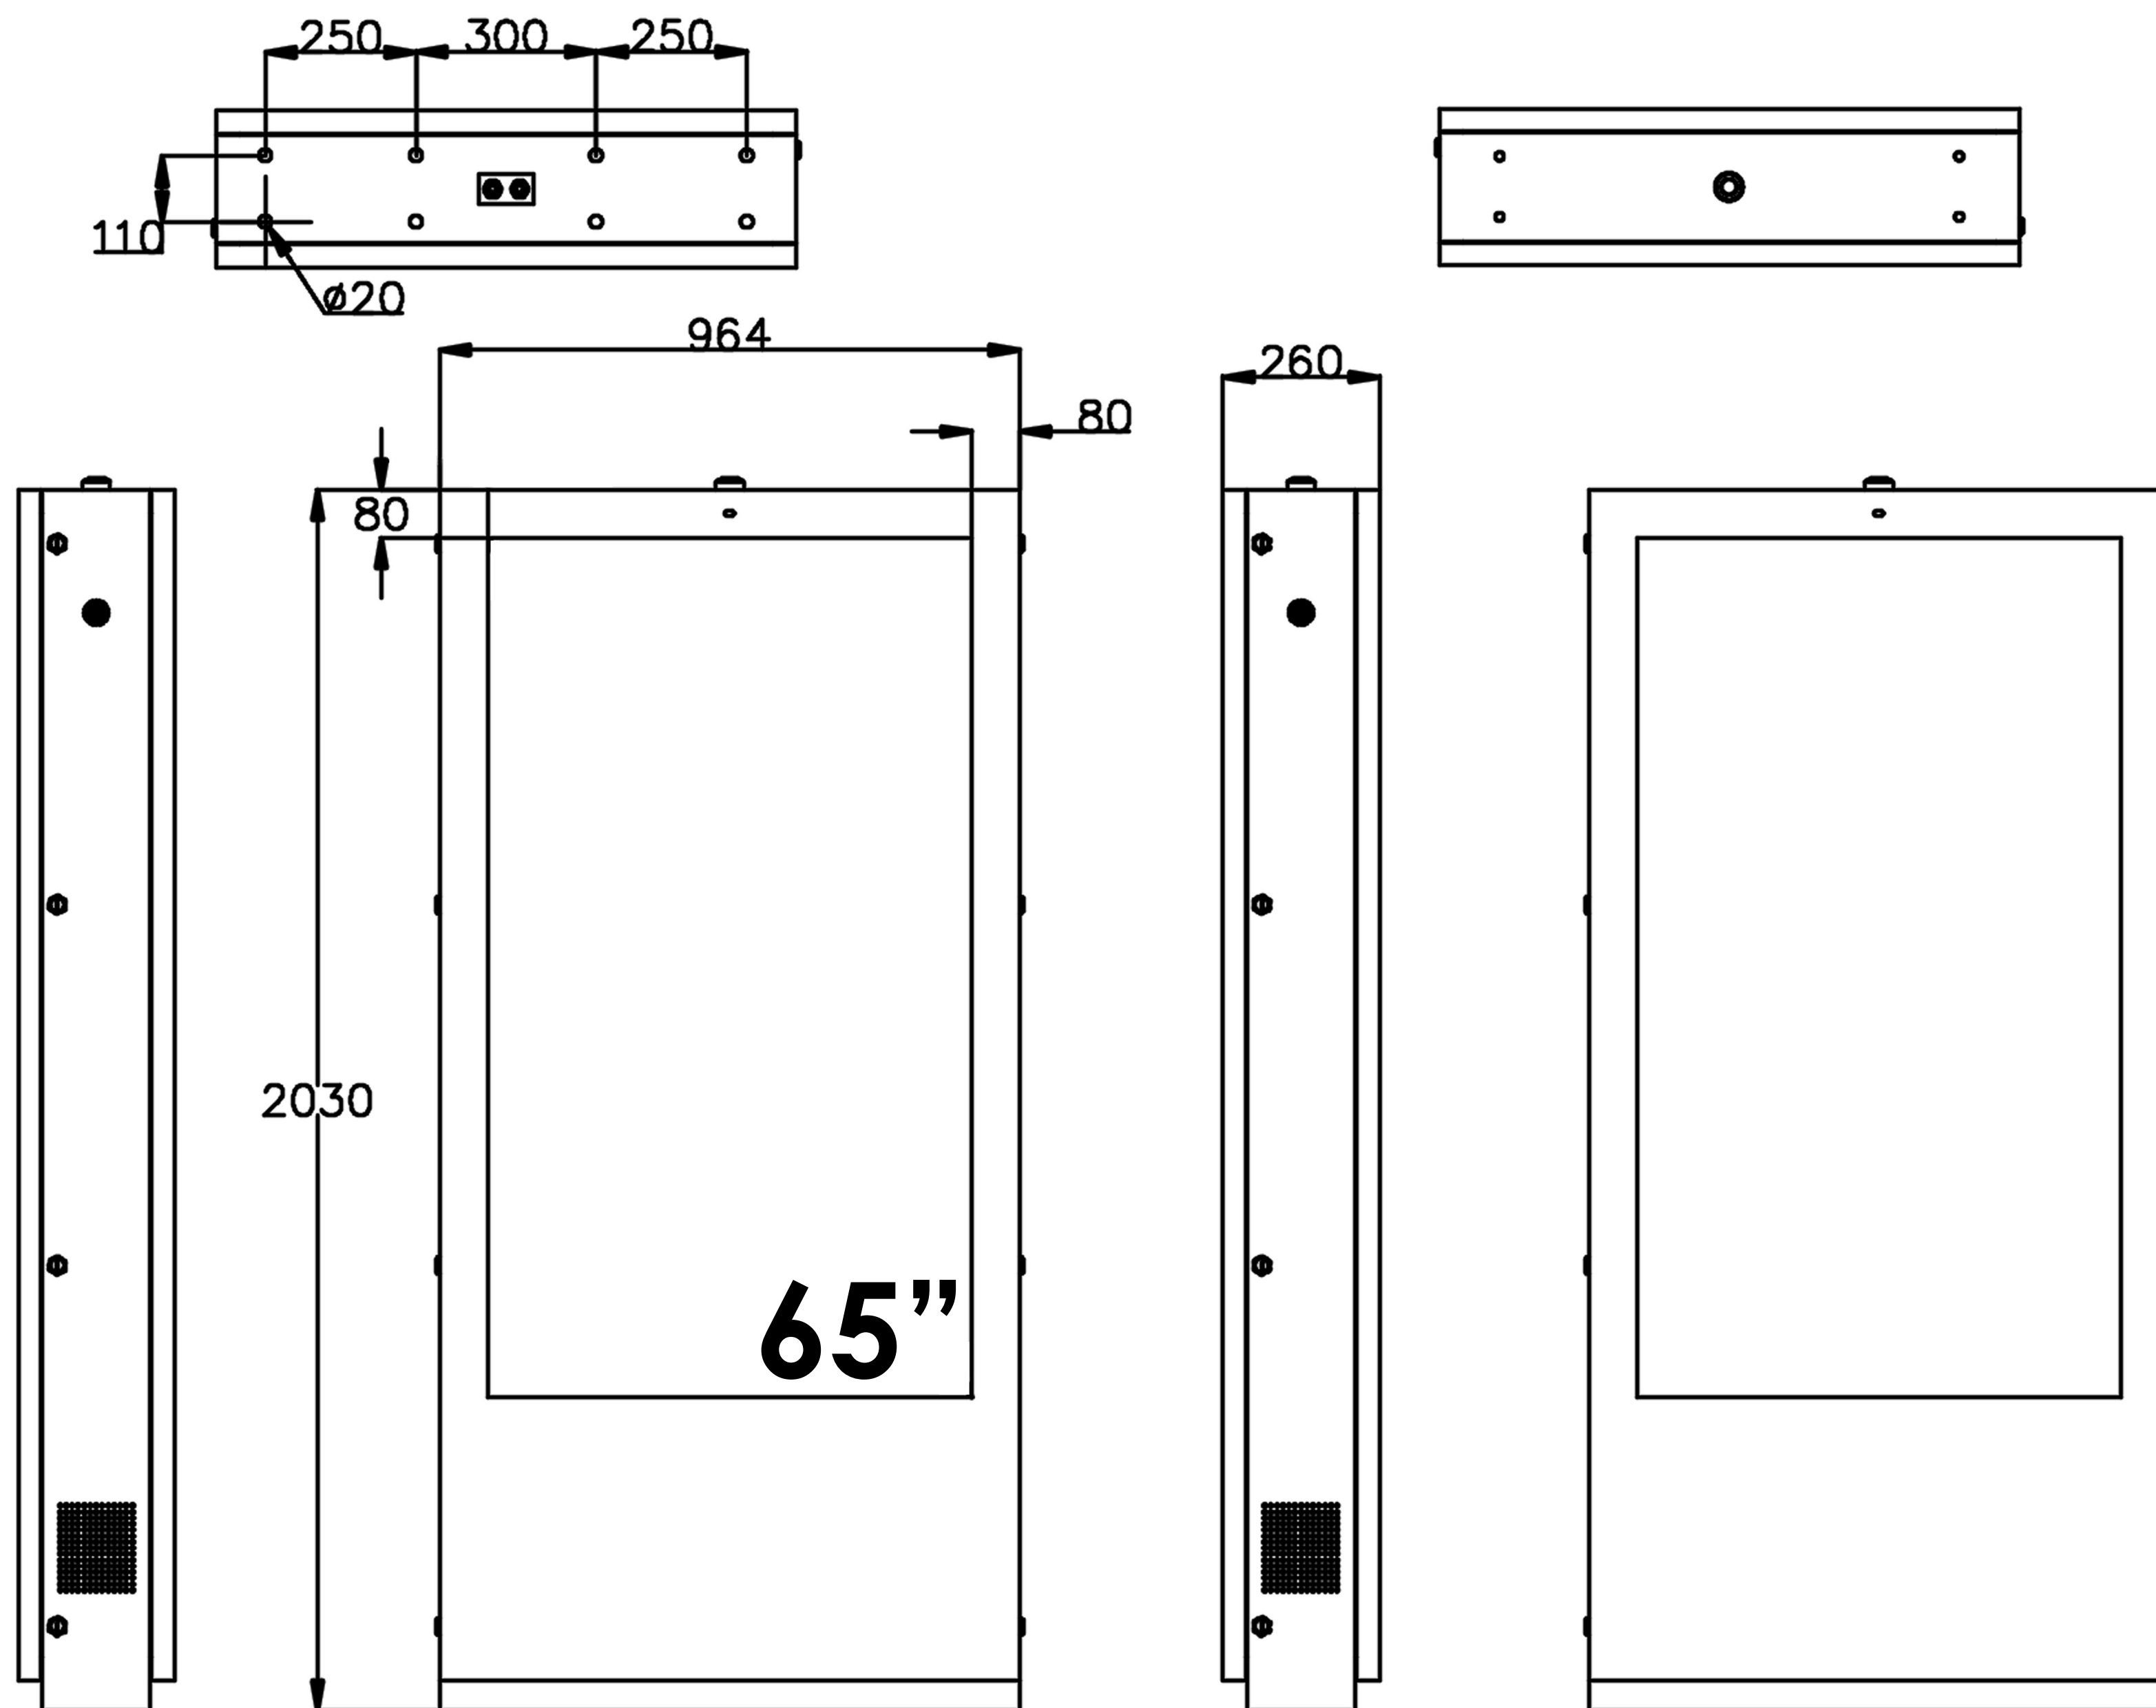


Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

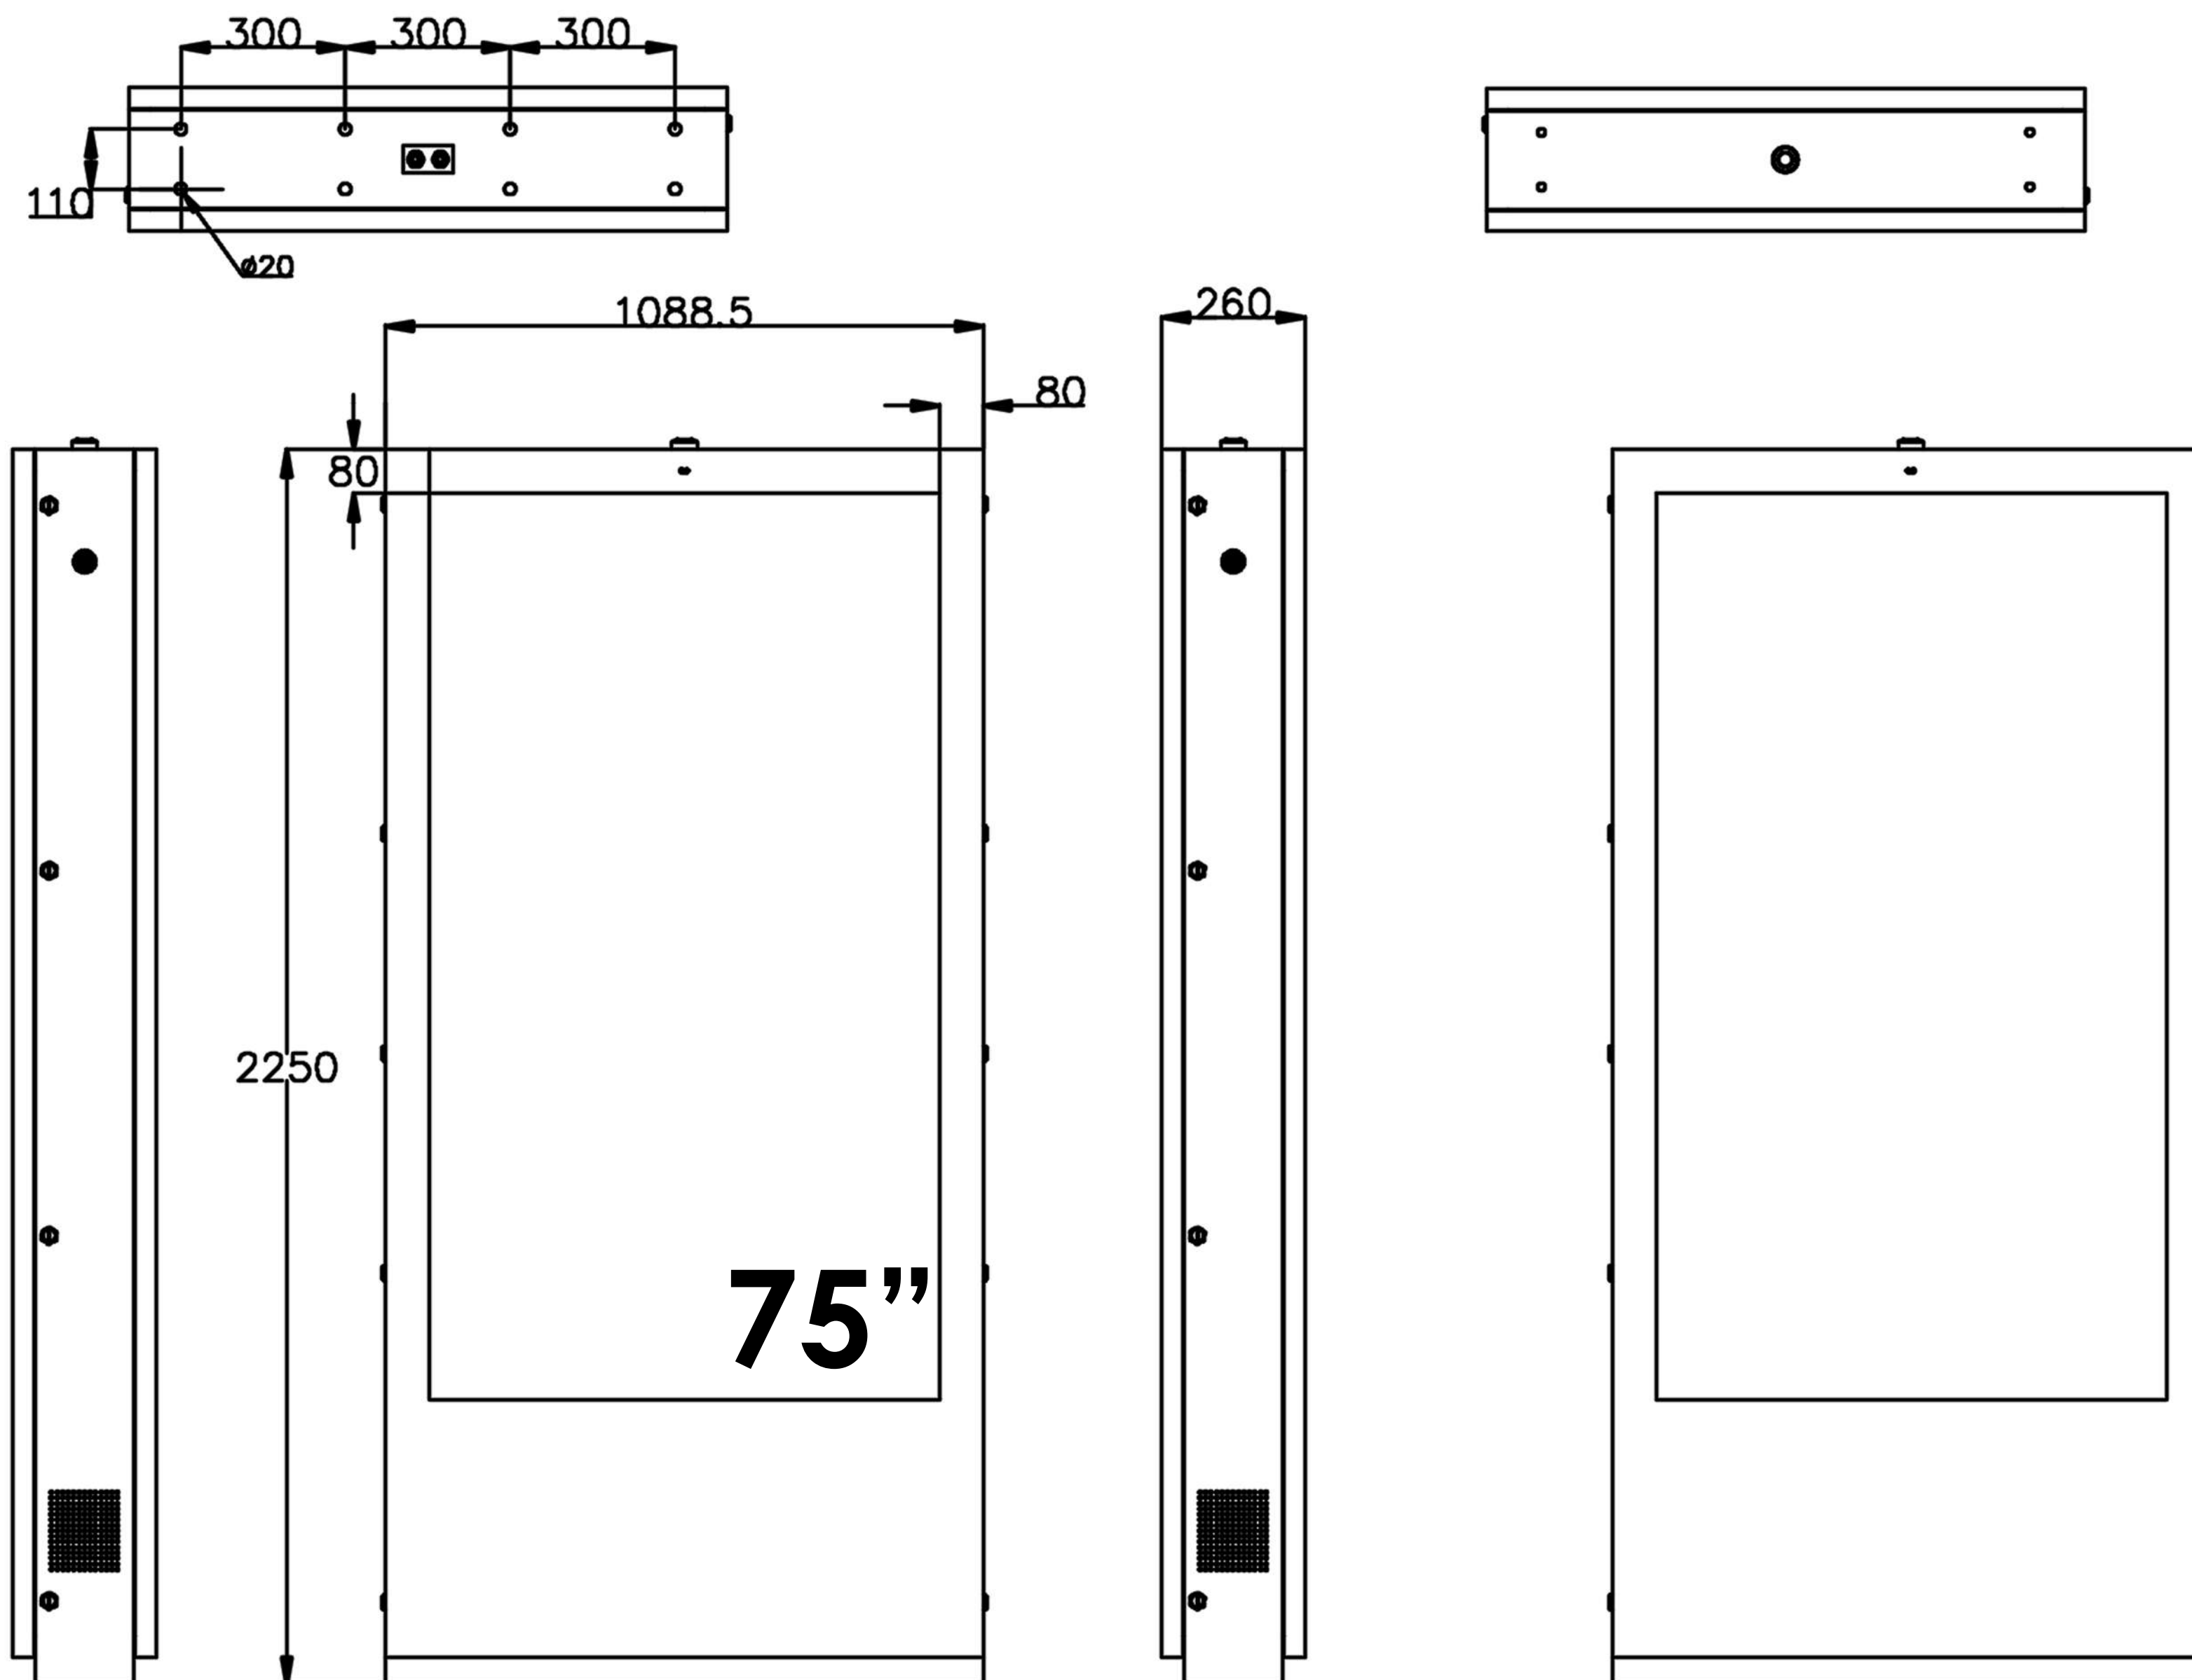

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794